



XGLO® FIBER OPTIC CABLE (SM) — US

Siemon's XGLO singlemode optical fiber cable is perfectly suited for the support of extended distance 10 Gigabit Ethernet (> 550m) applications as well as emerging applications, such as 40 Gb/s Synchronous Optical Network (SONET), that will operate at speeds beyond 10Gb/s. XGLO singlemode cables are constructed from optical fibers that exhibit low and stable insertion loss performance over the entire operating range (including the 1400 nm "water peak" band) to ensure compatibility with coarse wavelength (CWDM) and dense wavelength (DWDM) applications.



10G ip™

SIEMON CABLE — US

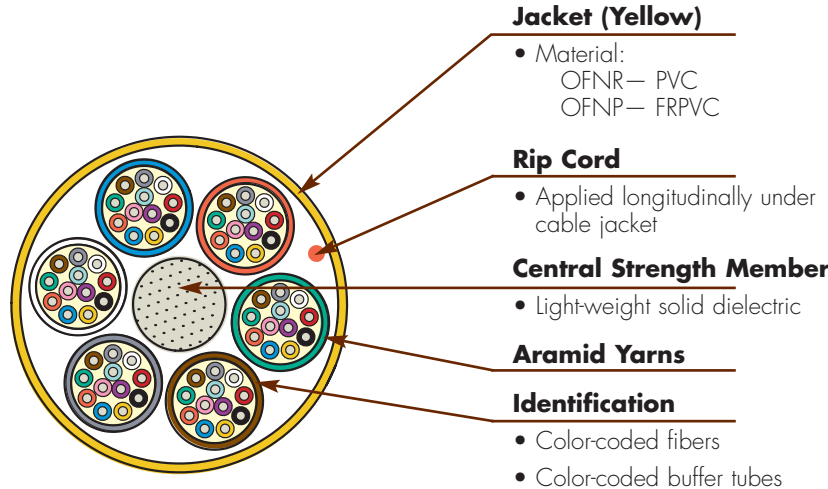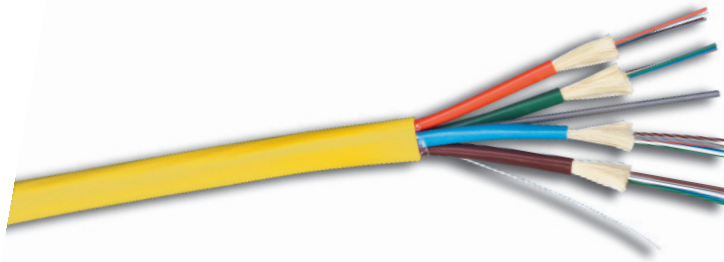

PART #	FIBER COUNT	CONSTRUCTION
9BB8(X)002B-E205A	2	.1 tube of 2 fibers
9BB8(X)004C-E205A	4	.1 tube of 4 fibers
9BB8(X)006D-E205A	6	.1 tube of 6 fibers
9BB8(X)008E-E205A	8	.1 tube of 8 fibers
9BB8(X)012G-E205A	12	.1 tube of 12 fibers
9BB8(X)016C-E205A	16	.4 tubes of 4 fibers
9BB8(X)024L-E205A	24	.1 tube of 24 fibers
9BB8(X)036D-E205A	36	.6 tubes of 6 fibers
9BB8(X)048G-E205A	48	.4 tubes of 12 fibers
9BB8(X)072G-E205A	72	.6 tubes of 12 fibers

Use (X) to specify cable rating: R = OFNR, P = OFNP
 All fiber counts available in lengths of 1640 ft. (500m) and up

HIGHLIGHTS

- 900µm tight buffer
- 250µm coated optical fiber
- Length markings in 2 ft. increments
- Available in OFNR and OFNP constructions
- Jacket material is lead free

PACKAGING

- Reels

STANDARDS COMPLIANCE

- ISO/IEC 11801:2002 OS1
- ANSI/TIA/EIA-568-B.3
- Telcordia GR-409-CORE
- ITU-T G.652.C
- OFNR: Communications Type OFNR (UL) and CSA FT4 c(UL)
- OFNP: Communications Type OFNP (UL) and CSA FT6 c(UL)

ETHERNET APPLICATIONS SUPPORT

APPLICATION	DISTANCE (m)
10GBASE-L (1310 nm)	8,000
10GBASE-E (1550 nm)	30,000
10G Fibre Channel (Serial-1310 nm)	10,000
10G Fibre Channel (WDM-1310 nm)	10,000
1000BASE-LX (1300 nm)	5,000
Fibre Channel 266/1062 (1300 nm)	10,000
ATM 52/155/622 (1300 nm)	15,000

CONNECTING THE WORLD TO A HIGHER STANDARD

WWW.SIEMON.COM



PRODUCT INFORMATION



OPTICAL SPECIFICATIONS — Minimum Performance Parameters for XGLO® Singlemode Fiber — Low Water Peak

Fiber	Cable Type	Maximum Attenuation (dB/km)*		Zero Dispersion		Index of Refraction	
		1310 nm	1550 nm	Wavelength (nm)	Slope (nm ² -km)	1310 nm	1550 nm
Singlemode	Indoor	0.50	0.50	1300-1324	<0.093	1.467	1.468

*Superior low water peak performance is exhibited across the full operating bandwidth

Mode and Fiber Type	Core Size (Microns)**	Cladding Size (Microns)	Coating Size (Microns)	Buffer Size (Microns)	Core Cladding Concentricity (Microns)
Singlemode	8.3 ± 1.0	125 ± 1.0	245 ± 10	900 ± 50	≤0.8

**Mode Field Diameter: 8.8 - 9.3 ± 0.5µm @1310nm

PHYSICAL SPECIFICATIONS

Fiber Count	Nominal Cable Diameter mm (in.)	Maximum Pulling Tension Newtons (lbs)				Maximum Net Weight kg/km (lbs/1000 ft.)	
		Installation		Long Term			
		OFNR/OFNP	OFNR	OFNP	OFNR	OFNP	OFNR
2	4.8 (0.19)	400 (90)	400 (90)	120 (27)	120 (27)	17 (12)	20 (13.1)
4	4.8 (0.19)	660 (148)	440 (99)	198 (45)	132 (30)	19 (13)	22 (15)
6	4.8 (0.19)	660 (148)	440 (99)	198 (45)	132 (30)	22 (15)	25 (16.5)
8	5.8 (0.23)	900 (202)	560 (126)	270 (61)	168 (38)	28 (19)	31 (21)
12	5.8 (0.23)	900 (202)	560 (126)	270 (61)	168 (38)	32 (22)	36 (24.4)
16	13.7 (0.54)	1320 (297)	660 (148)	396 (89)	198 (45)	139 (93)	209 (140)
24	8.8 (0.35)	1282 (288)	1282 (288)	641 (144)	641 (144)	78 (52.4)	78 (52.4)
36	16.5 (0.65)	1320 (297)	660 (148)	396 (89)	198 (45)	213 (143)	221 (148)
48	16.0 (0.63)	2700 (607)	1000 (225)	810 (182)	300 (67)	200 (134)	207 (139)
72	19.6 (0.77)	2700 (607)	1000 (225)	810 (182)	300 (67)	310 (208)	322 (216)

Fiber Count	Minimum Crush Resistance (N/mm)	Minimum Flex Resistance Cycles	Operating Temperature (° F)	Installation Temperature (° F)	Storage Temperature (° F)	Minimum Bend Radius	
						Installation	Long Term
2-24	22	25/100	-4 to 122	32 to 140	-40 to 140	15 x DIA.	10 x DIA.
36-72	22	25/100	-4 to 122	32 to 140	-40 to 140	20 x DIA.	10 x DIA.


Example Cable Constructions:




4 & 6 FIBER (6 fiber shown)




12 FIBER



24 FIBER



48 FIBER



72 FIBER

Because we continuously improve our products, Siemon reserves the right to change specifications and availability without prior notice. XGLO™ and 10G ip™ are trademarks of Siemon

Visit our web site for fiber connectivity and related products