

XGLO™ & LightSystem® Indoor/Outdoor Tight Buffer (International)

Siemon LSOH (IEC 60332-3) indoor/outdoor tight buffer cables are ideal for data centers, campus and building backbones. Siemon fiber optic cables are offered in XGLO and LightSystem configurations supporting high-speed applications such as Gigabit Ethernet, 10 Gigabit Ethernet, Gigabit ATM and Fiber Channel.

Ordering Information

XGLO Multimode 50/125 OM3, OM4, Singlemode OS2, LightSystem Multimode 62.5/125 OM1, 50/125 OM2

Part#	Fiber Count	Construction
9GD(X)H004C-(XXXX)M	4	1 tube of 4 fibers
9GD(X)H006D-(XXXX)M	6	1 tube of 6 fibers
9GD(X)H008E-(XXXX)M	8	1 tube of 8 fibers
9GD(X)H012G-(XXXX)M	12	1 tube of 12 fibers


Part#	Fiber Count	Construction
9GD(X)H016K-(XXXX)M	16	1 tube of 16 fibers
9GD(X)H024L-(XXXX)M	24	1 tube of 24 fibers
9GD(X)H048G-(XXXX)M	48	4 tubes of 12 fibers
9GD(X)H072G-(XXXX)M	72	6 tubes of 12 fibers

Use 1st (X) to specify fiber type: 5 = 50/125µm, 6 = 62.5/125µm, 5 = 50/125µm Laser Optimized, 8 = Singlemode

Use (XXXX) to specify class performance: G101 = OM1 62.5µm, T101 = OM2 50µm, T301 = OM3 50µm Laser Optimized, T501 = OM4 50µm Laser Optimized, E201 = OS2 Singlemode

M = meters

Note: Contact Siemon Customer Service for cables available in fixed reel lengths.

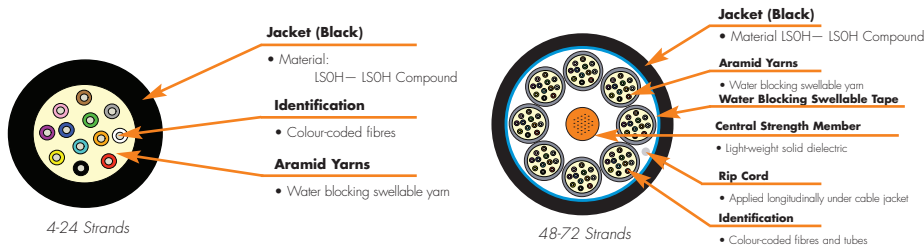

RoHS Compliant

XGLO Singlemode, OS2	XGLO (550) Multimode, 50/125, OM4	XGLO Multimode (300) 50/125, OM3	LIGHTSYSTEM Multimode 50/125, OM2; 62.5 OM1																																																																																								
STANDARDS COMPLIANCE	STANDARDS COMPLIANCE	STANDARDS COMPLIANCE	STANDARDS COMPLIANCE																																																																																								
<ul style="list-style-type: none"> ISO/IEC 11801:Ed 2.0 Amendment:1:2008 ANSI/TIA/EIA-568-C.3 ANSI/TIA-598-C Telcordia GR-409-CORE ITU-T G.652.C/D IEC 60332-3 IEC 60332-1-2 (Single strand), IEC 60754-2 (Acid gas), IEC 61034-2 (Smoke density) 	<ul style="list-style-type: none"> ISO/IEC 11801:2002 OM3 ISO/IEC 11801:2002 Amendment 2 OM4 ANSI/TIA/EIA-568-C.3 ANSI/TIA-598-C ANSI/TIA-492 AAAD IEC 60793-2-10 Fiber Type A1a.3 Telcordia GR-409-CORE IEC 60332-3 IEC 60332-1-2 (Single strand), IEC 60754-2 (Acid gas), IEC 61034-2 (Smoke density) 	<ul style="list-style-type: none"> ISO/IEC 11801:2002 OM3 ANSI/TIA/EIA-568-C.3 ANSI/TIA-598-C ANSI/TIA-492 AAAC Telcordia GR-409-CORE IEC 60332-3 IEC 60332-1-2 (Single strand), IEC 60754-2 (Acid gas), IEC 61034-2 (Smoke density) 	<ul style="list-style-type: none"> ISO/IEC 11801:2002 OM1 (62.5/125) ISO/IEC 11801:2002 OM2 (50/125) ANSI/TIA/EIA-568-C.3 ANSI/TIA-598-C ANSI/TIA-492 AAAB Telcordia GR-409-CORE IEC 60332-3 IEC 60332-1-2 (Single strand), IEC 60754-2 (Acid gas), IEC 61034-2 (Smoke density) 																																																																																								
APPLICATIONS SUPPORT	APPLICATIONS SUPPORT	APPLICATIONS SUPPORT	APPLICATIONS SUPPORT																																																																																								
<table border="1"> <thead> <tr> <th>APPLICATION</th> <th>DISTANCE (m)</th> </tr> </thead> <tbody> <tr><td>10GBASE-L (1310 nm)</td><td>8,000</td></tr> <tr><td>10GBASE-E (1550 nm)</td><td>30,000</td></tr> <tr><td>10G Fibre Channel (Serial-1310 nm)</td><td>10,000</td></tr> <tr><td>10G Fibre Channel (WDM-1310 nm)</td><td>10,000</td></tr> <tr><td>1000BASE-LX (1300 nm)</td><td>5,000</td></tr> <tr><td>Fibre Channel 266/1062 (1300 nm)</td><td>10,000</td></tr> <tr><td>ATM 52/155/622 (1300 nm)</td><td>15,000</td></tr> </tbody> </table>	APPLICATION	DISTANCE (m)	10GBASE-L (1310 nm)	8,000	10GBASE-E (1550 nm)	30,000	10G Fibre Channel (Serial-1310 nm)	10,000	10G Fibre Channel (WDM-1310 nm)	10,000	1000BASE-LX (1300 nm)	5,000	Fibre Channel 266/1062 (1300 nm)	10,000	ATM 52/155/622 (1300 nm)	15,000	<table border="1"> <thead> <tr> <th>APPLICATION</th> <th>DISTANCE (m)</th> </tr> </thead> <tbody> <tr><td>10GBASE-SX (850 nm)</td><td>550</td></tr> <tr><td>10GBASE-LX4 (1300 nm)</td><td>300</td></tr> <tr><td>1000BASE-SX (850 nm)</td><td>1000</td></tr> <tr><td>1000BASE-LX (1300 nm)</td><td>600</td></tr> <tr><td>Fibre Channel 266 (1300 nm)</td><td>1,500</td></tr> <tr><td>ATM 622 (1300 nm)</td><td>500</td></tr> <tr><td>ATM 155 (1300 nm)</td><td>2,000</td></tr> <tr><td>ATM 52 (1300 nm)</td><td>3,000</td></tr> <tr><td>FDDI (Original-1300 nm)</td><td>2,000</td></tr> <tr><td>100BASE-FX (1300 nm)</td><td>2,000</td></tr> </tbody> </table>	APPLICATION	DISTANCE (m)	10GBASE-SX (850 nm)	550	10GBASE-LX4 (1300 nm)	300	1000BASE-SX (850 nm)	1000	1000BASE-LX (1300 nm)	600	Fibre Channel 266 (1300 nm)	1,500	ATM 622 (1300 nm)	500	ATM 155 (1300 nm)	2,000	ATM 52 (1300 nm)	3,000	FDDI (Original-1300 nm)	2,000	100BASE-FX (1300 nm)	2,000	<table border="1"> <thead> <tr> <th>APPLICATION</th> <th>DISTANCE (m)</th> </tr> </thead> <tbody> <tr><td>10GBASE-SX (850 nm)</td><td>300</td></tr> <tr><td>10GBASE-LX4 (1300 nm)</td><td>300</td></tr> <tr><td>1000BASE-SX (850 nm)</td><td>900</td></tr> <tr><td>1000BASE-LX (1300 nm)</td><td>600</td></tr> <tr><td>Fibre Channel 266 (1300 nm)</td><td>1,500</td></tr> <tr><td>ATM 622 (1300 nm)</td><td>500</td></tr> <tr><td>ATM 155 (1300 nm)</td><td>2,000</td></tr> <tr><td>ATM 52 (1300 nm)</td><td>3,000</td></tr> <tr><td>FDDI (Original-1300 nm)</td><td>2,000</td></tr> <tr><td>100BASE-FX (1300 nm)</td><td>2,000</td></tr> </tbody> </table>	APPLICATION	DISTANCE (m)	10GBASE-SX (850 nm)	300	10GBASE-LX4 (1300 nm)	300	1000BASE-SX (850 nm)	900	1000BASE-LX (1300 nm)	600	Fibre Channel 266 (1300 nm)	1,500	ATM 622 (1300 nm)	500	ATM 155 (1300 nm)	2,000	ATM 52 (1300 nm)	3,000	FDDI (Original-1300 nm)	2,000	100BASE-FX (1300 nm)	2,000	<table border="1"> <thead> <tr> <th>APPLICATION</th> <th>DISTANCE (m)</th> </tr> </thead> <tbody> <tr><td>10GBASE-SX (850 nm)</td><td>82</td></tr> <tr><td>50/125µm</td><td>26</td></tr> <tr><td>62.5/125µm</td><td>550</td></tr> <tr><td>1000BASE-SX (850 nm)</td><td>275</td></tr> <tr><td>50/125µm</td><td>550</td></tr> <tr><td>62.5/125µm</td><td>550</td></tr> <tr><td>1000BASE-LX (1300 nm)</td><td>1,500</td></tr> <tr><td>Fibre Channel 266 (1300 nm)</td><td>500</td></tr> <tr><td>ATM 622 (1300 nm)</td><td>2,000</td></tr> <tr><td>ATM 155 (1300 nm)</td><td>3,000</td></tr> <tr><td>ATM 52 (1300 nm)</td><td>2,000</td></tr> <tr><td>FDDI (Original-1300 nm)</td><td>2,000</td></tr> <tr><td>100BASE-FX (1300 nm)</td><td>2,000</td></tr> </tbody> </table>	APPLICATION	DISTANCE (m)	10GBASE-SX (850 nm)	82	50/125µm	26	62.5/125µm	550	1000BASE-SX (850 nm)	275	50/125µm	550	62.5/125µm	550	1000BASE-LX (1300 nm)	1,500	Fibre Channel 266 (1300 nm)	500	ATM 622 (1300 nm)	2,000	ATM 155 (1300 nm)	3,000	ATM 52 (1300 nm)	2,000	FDDI (Original-1300 nm)	2,000	100BASE-FX (1300 nm)	2,000
APPLICATION	DISTANCE (m)																																																																																										
10GBASE-L (1310 nm)	8,000																																																																																										
10GBASE-E (1550 nm)	30,000																																																																																										
10G Fibre Channel (Serial-1310 nm)	10,000																																																																																										
10G Fibre Channel (WDM-1310 nm)	10,000																																																																																										
1000BASE-LX (1300 nm)	5,000																																																																																										
Fibre Channel 266/1062 (1300 nm)	10,000																																																																																										
ATM 52/155/622 (1300 nm)	15,000																																																																																										
APPLICATION	DISTANCE (m)																																																																																										
10GBASE-SX (850 nm)	550																																																																																										
10GBASE-LX4 (1300 nm)	300																																																																																										
1000BASE-SX (850 nm)	1000																																																																																										
1000BASE-LX (1300 nm)	600																																																																																										
Fibre Channel 266 (1300 nm)	1,500																																																																																										
ATM 622 (1300 nm)	500																																																																																										
ATM 155 (1300 nm)	2,000																																																																																										
ATM 52 (1300 nm)	3,000																																																																																										
FDDI (Original-1300 nm)	2,000																																																																																										
100BASE-FX (1300 nm)	2,000																																																																																										
APPLICATION	DISTANCE (m)																																																																																										
10GBASE-SX (850 nm)	300																																																																																										
10GBASE-LX4 (1300 nm)	300																																																																																										
1000BASE-SX (850 nm)	900																																																																																										
1000BASE-LX (1300 nm)	600																																																																																										
Fibre Channel 266 (1300 nm)	1,500																																																																																										
ATM 622 (1300 nm)	500																																																																																										
ATM 155 (1300 nm)	2,000																																																																																										
ATM 52 (1300 nm)	3,000																																																																																										
FDDI (Original-1300 nm)	2,000																																																																																										
100BASE-FX (1300 nm)	2,000																																																																																										
APPLICATION	DISTANCE (m)																																																																																										
10GBASE-SX (850 nm)	82																																																																																										
50/125µm	26																																																																																										
62.5/125µm	550																																																																																										
1000BASE-SX (850 nm)	275																																																																																										
50/125µm	550																																																																																										
62.5/125µm	550																																																																																										
1000BASE-LX (1300 nm)	1,500																																																																																										
Fibre Channel 266 (1300 nm)	500																																																																																										
ATM 622 (1300 nm)	2,000																																																																																										
ATM 155 (1300 nm)	3,000																																																																																										
ATM 52 (1300 nm)	2,000																																																																																										
FDDI (Original-1300 nm)	2,000																																																																																										
100BASE-FX (1300 nm)	2,000																																																																																										

XGLO™ 10 Gigabit Ethernet Fiber Optic Cable

Minimum Performance Parameters for XGLO 50/125µm Multimode Fiber

Fiber Type	Guaranteed Gigabit Transmission Distance (m)		Guaranteed 10 Gigabit Transmission Distance (m)		Minimum Bandwidth (MHz • km)		Maximum Attenuation (dB/km)		Group Index of Refraction	
	850 nm	1300 nm	850 nm†	1300 nm††	850 nm	1300 nm	850 nm	1300 nm	850 nm	1300 nm
50/125 (OM3)	900	600	300	300	RML - 2000 OFL - 1500	OFL - 500	3.5	1.0	1.483	1.479
50/125 (OM4)	1040	600	550	300	RML - 4700 OFL - 3500	OFL - 500	3.0	1.0	1.483	1.479

† 10GBASE-S †† 10GBASE-LX4

Minimum Performance Parameters for XGLO Singlemode Fiber

Fibre Type	Wavelength (nm)	Maximum Attenuation (dB/km)	Zero Dispersion Wavelength (nm)	Zero Dispersion Slope (nm ² -km)	Index of Refraction
Singlemode (OS2)	1310	0.40	1312 ± 10	≤0.089	1.468
	1550	0.30	1312 ± 10	≤0.089	1.468
	1310-1625	<0.40	1312 ± 10	≤0.089	1.468

LightSystem® Gigabit Ethernet Fiber Optic Distribution Cable

Minimum Performance Parameters for LightSystem 50/125µm & 62.5/125µm Multimode Fiber

Fiber Type	Wavelength nm	Maximum Attenuation (dB/km)	Minimum Modal Bandwidth (MHz • km)	Guaranteed Gigabit Transmission Distance (Meters)	Index of Refraction
50/125µm (OM2)	850	3.5	500	550	1.483
	1300	1.0	500	550	1.479
62.5/125µm (OM1)	850	3.5	200	275	1.495
	1300	1.0	500	550	1.490

*The protocol pertinent to the transmission distance as noted is Gigabit Ethernet per IEEE 802.3:2005.

XGLO and LightSystem Physical Specifications

PHYSICAL SPECIFICATIONS

Fibre Count	Nominal Cable Diameter (mm)	Maximum Pulling Tension (Newtons)		Nominal Net Weight (kg/km)
		Installation	Long Term	
4	5.3	1500	495	23
6	5.3	1500	495	25
8	5.8	1500	495	30
12	6.2	1500	495	35
16	7.8	1500	495	49
24	8.8	1500	495	61
48	18.3	4200	1400	255
72	21.9	5400	1800	384

Fibre Count	Maximum Crush Resistance (N/mm)	Operating Temperature (°C)	Storage Temperature (°C)	Minimum Bend Radius	
				Installation	Long Term
4-12	5	-40/70	-40/70	20 x DIA.	10 x DIA.
16-72	10	-20/70	-20/70	20 x DIA.	10 x DIA.

Custom lengths and jacket colours are available upon request. Contact our Customer Service Department for more information. Because we continuously improve our products, Siemon reserves the right to change specifications and availability without prior notice. LightSystem® & XGLO® are trademarks of Siemon