



CATEGORY 6® TRUNKING CABLE ASSEMBLIES

Siemon's category 6 UTP copper trunking cable assemblies provide an efficient and cost effective alternative to individual field-terminated components. Combining factory terminated and tested category 6 UTP MAX® modules with Siemon category 6 cable, Siemon copper trunking cable assemblies were designed to enable rapid deployment of data centers. In addition to providing simple and aesthetically pleasing cable management, standard configurations also help maintain consistent cable layout and facilitate efficient moves, adds and changes.

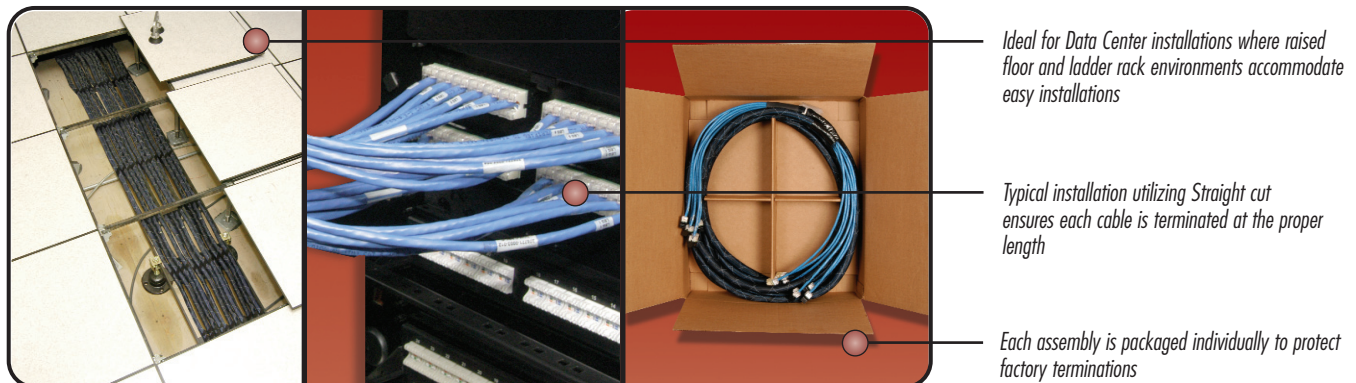

TRUNKING PRODUCTS

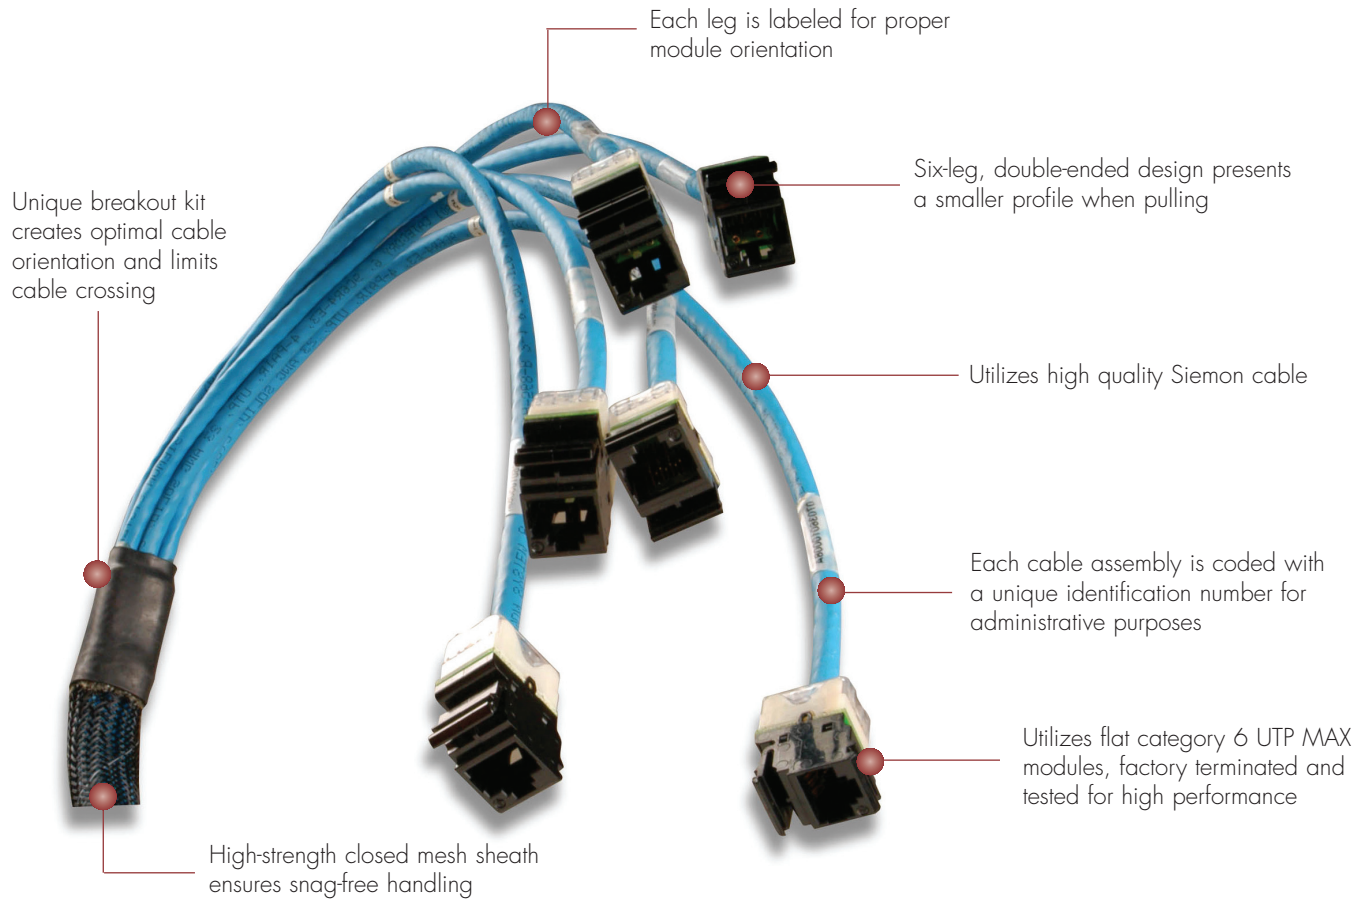

CONNECTING THE WORLD TO A HIGHER STANDARD

WWW.SIEMON.COM




PRODUCT INFORMATION

TRUNKING PRODUCTS

Category 6® UTP Trunking Cable Assemblies:

Major Product Features:

- 6-leg, double ended construction
 - Presents a smaller profile when pulling
- Straight cut
 - Allows left, right or center exit
- Terminated with MAX outlets
- Unique closed mesh sheath
 - Ensures snag-free handling
 - Material properties match the cable jacket
- Robust breakout kit
 - Maintains cable orientation and prevents crossing
- Pre-attached pulling eye to aid installation

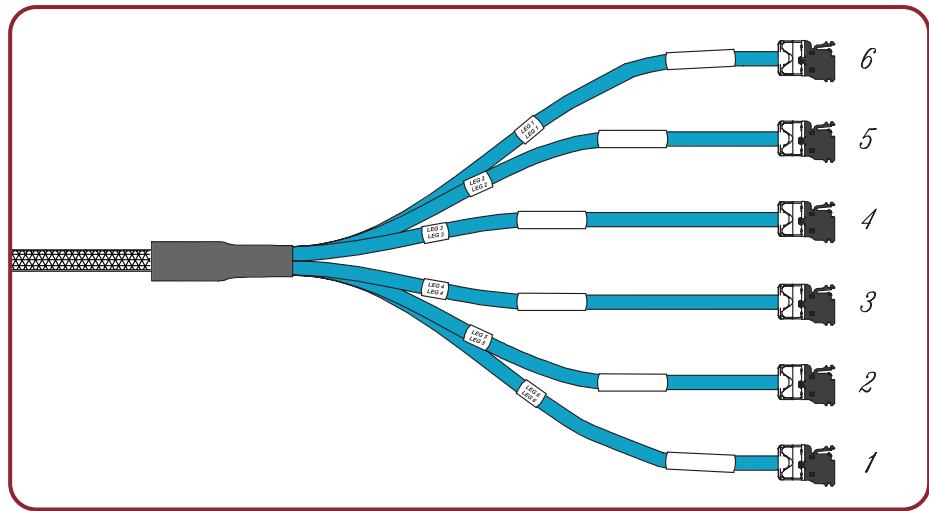

Premium 6 Trunking Cable Assemblies:

- TPRD6E-A1A1(XXX)(X)Premium 6, riser rated (CMR) cable, double ended flat black MAX® modules, blue jacket, 250MHz
- TPPD6E-A1A1(XXX)(X)Premium 6, plenum rated (CMP) cable, double ended flat black MAX modules, blue jacket, 250MHz
- TPLD8E-A1A1(XXX)(X)Premium 6, LSOH rated (IEC 60332-1) cable, double ended flat black MAX modules, violet jacket, 250MHz

System 6 Trunking Cable Assemblies:

- TCRD6E-A1A1(XXX)(X)System 6, riser rated (CMR) cable, double ended flat black MAX modules, blue jacket, 250MHz
- TCPD6E-A1A1(XXX)(X)System 6, plenum rated (CMP) cable, double ended flat black MAX modules, blue jacket, 250MHz
- TCLD8E-A1A1(XXX)(X)System 6, LSOH rated (IEC 60332-1) cable, double ended flat black MAX modules, violet jacket, 250MHz

Use (XXX) to specify length*:

009-295 ft. in increments of 3 feet

003-90m in increments of 1 meter

Use (X) unit: F = feet, M = meters,

Other lengths available upon request.

* Lengths below 24m (80 ft.) are coiled and packed in box. Longer lengths ship on reels.

Note: These products are made to order. Call for lead time and part number availability in your region.

Because we continuously improve our products, Siemon reserves the right to change specifications and availability without prior notice.

MAX®, MC® and BladePatch® are trademarks of Siemon

For related product information request Spec Sheet(s):

- MC® 6 UTP Modular Cords (PROD-SS-MC6)
- BladePatch® 6 UTP Modular Cords (PROD-SS-BDP6U)
- MAX® Patch Panels (PROD-SS-MXPP)

The Americas
Watertown, CT USA
Phone (1) 860 945 4200

Europe/Middle East/Africa
Surrey, England
Phone (44) 0 1932 571771

Asia/Pacific
Shanghai, P.R. China
Phone (86) 21 6390 6778

Japan
Tokyo, Japan
Phone (81) (3) 5437-1580

PROD-SS-TRNKCSYS6 Rev. D 5/08

© 2008 Siemon

WWW.SIEMON.COM

ISO 9001
CERTIFIED

ISO 14001
CERTIFIED



SIEMON™