


# SFP+ 10G Active and Passive Copper Cable Assemblies

Siemon SFP+ active and passive copper cable assemblies were developed specifically as a cost-effective alternative to optical modules for short reach links in high-speed interconnect applications such as high-performance computing (HPC), enterprise networking and network storage markets. These assemblies support data transfer rates up to 10+ Gb/s per lane, meeting or exceeding current standards specifications.

These SFP+ fully-shielded assemblies combine twin-axial shielded cable configuration with robust die cast housings for enhanced support of high frequency data rates. These SFP+ assemblies are impedance matched to ensure interoperability and minimize EMI leakage through their fully-shielded design.

The active cables use signal processing within the connector back shells to extend the length that copper cables can reach beyond the limits of passive copper solutions.

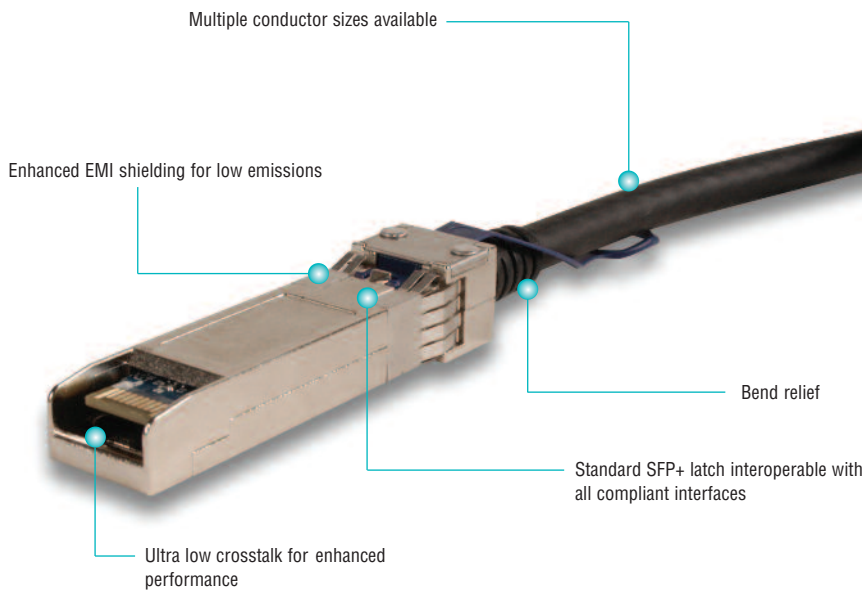


**STANDARDS COMPLIANCE**


- Electrical: SFF-8431, SFF-8083
- Mechanical: SFF-8432
- EEPROM: SFF-8472
- RoHS

**APPLICATIONS**

- InfiniBand SDR, DDR and QDR
- Ethernet 1G, 10G and 40G
- Fibre Channel
- Rack-to-Rack, Top of Rack (TOR) and Core Switch
- Networking
- Storage
- Hubs, switches, routers, servers

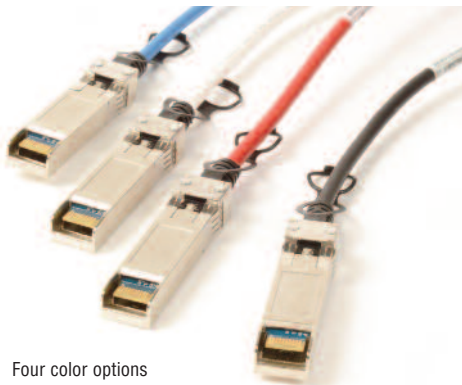

## PCB Termination

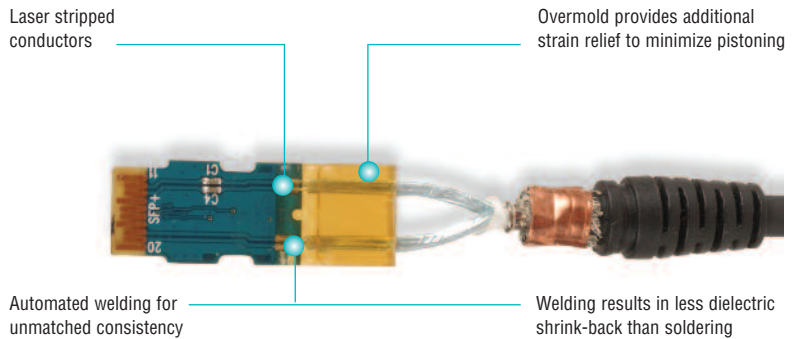

# Product Information

## PERFORMANCE SPECIFICATIONS

Electrical	
Min. Dielectric Withstand Voltage	300 VDC
Insulation Resistance	1000 Mohms
Current Rating	0.5 Amp Min/Signal Contact
Power Consumption (active cables only)	700mw Max
General	
Operating Temperature	-10 to 70°C (14 to 158°F)
Flammability Rating	UL 94 V-0
Green Features	RoHS, Lead-Free
Shield	Braid/Foil
Marking	Mfg Name, Part #, Date Code

**Color Options Available:** 

## Ordering Information:

SFP+ Passive/Active Copper Cable Assemblies

Part Number (Black)	Part Number (Colored)	Length	Gauge	Type
SFPP30-00.3(X)	SFPP30-00.3-(XX)(X)	0.3m (1 ft.)	30	Passive
SFPP30-00.5(X)	SFPP30-00.5-(XX)(X)	0.5m (1.6 ft.)	30	Passive
SFPP30-01(X)	SFPP30-01-(XX)(X)	1m (3.3 ft.)	30	Passive
SFPP30-01.5(X)	SFPP30-01.5-(XX)(X)	1.5m (4.9 ft.)	30	Passive
SFPP30-02(X)	SFPP30-02-(XX)(X)	2m (6.6 ft.)	30	Passive
SFPP30-02.5(X)	SFPP30-02.5-(XX)(X)	2.5m (8.2 ft.)	30	Passive
SFPP30-03(X)	SFPP30-03-(XX)(X)	3m (9.8 ft.)	30	Passive
SFPP30-03.5(X)	SFPP30-03.5-(XX)(X)	3.5m (11.5 ft.)	30	Passive
SFPP30-04(X)	SFPP30-04-(XX)(X)	4m (13.1 ft.)	30	Passive
SFPP28-05(X)	SFPP28-05-(XX)(X)	5m (16.4 ft.)	28	Passive
SFPP24-07(X)	SFPP24-07-(XX)(X)	7m (23.0 ft.)	24	Passive
SFPPA28-07(X)	SFPPA28-07-(XX)(X)	7m (23.0 ft.)	28	Active
SFPPA28-10(X)	SFPPA28-10-(XX)(X)	10m (32.8 ft.)	28	Active

Use (X) to specify LSOH: L = LSOH, blank = PVC  
 Use (XX) to specify color: 01 = Black, 02 = White, 03 = Red, 06 = Blue

## Color-Coded Cable Clips:

Our color-coded cable clips are designed to be highly visible, have a secure fit to the cable and easily field attachable to Siemon SFP+ cables. With 8 available colors to choose from, these color-coded cable clips provide Data Center Administrators the ability to customize their cables to clearly differentiate and identify various networks.

Part#	Description
CLIP-CBL-50-(XX).....	Color-coded cable clip, 30 and 28 AWG, bag of 25 clips
CLIP-CBL-62-(XX).....	Color-coded cable clip, 26 and 24 AWG, bag of 25 clips

Use (XX) to specify color:  
 02 = White, 03 = Red, 04 = Grey, 05 = Yellow, 06 = Blue, 07 = Green, 08 = Violet, 09 = Orange



Because we continuously improve our products, Siemon reserves the right to change specifications and availability without prior notice.

Worldwide Headquarters	Regional Headquarters	Regional Headquarters	Regional Headquarters	Regional Headquarters	Regional Headquarters	Siemon Interconnect Solutions
<b>North America</b> Watertown, CT USA Phone (1) 860 945 4200	<b>Europe</b> Chertsey, Surrey, England Phone (44) 0 1932 517771	<b>Russia</b> Shanghai, P.R. China Phone (86) 215385 0303	<b>Africa</b> Bogota, Colombia Phone (571) 657 1950/51/52	<b>China</b> Dubai, United Arab Emirates Phone (971) 4 3689743	<b>Latin America</b> Sydney, Australia Phone (86) 21 5385 0303	<b>India Middle East</b> Asia Pacific Watertown, CT USA Phone (1) 860 945 4213 US www.siemon.com/SIS

Plug	
Backshell Material	Nickel-Plated Zinc Diecast
Contact Material	PCB with Gold-Plated Pads
Latch	Positive Latching w/ Pull
Insertion Force	30N (6.7 lbf.) Max
Withdrawal Force	20N (4.5 lbf.) Max
Retention Force	90N (20.2 lbf.) Max
Durability	50 Cycles Min
Cable	
Conductor	Solid
Wire Gauge	30 AWG to 24 AWG
Impedance	100± 5 ohms
Construction	Twinaxial
Cable OD	30 AWG = 4.5mm (0.18 in.)
	28 AWG = 4.7mm (0.19 in.)
	24 AWG = 6.2mm (0.24 in.)
Jacket Type	PVC or LSOH
Bend Radius	5X Cable OD

© 2016 Siemon SIS\_SS\_SFP\_RevC\_0317