

## Base 8 Plug and Play Trunk Assemblies


Combining Siemon's reduced-diameter RazorCore™ cable with 8-fiber MTP connectors, Base 8 Plug and Play MTP Trunk Assemblies are designed to be quickly routed and connected to Siemon Plug and Play Modules and MTP Adapter Plates. Custom configurable to precise application requirements, these Base 8 assemblies put high-performance, high density fiber connections exactly where you need them while providing more efficient migration to support high-speed 8-fiber applications.

### Multiple Fiber Types

Available in multimode (laser optimized OM3 and OM4 50/125) and singlemode

### Reduced Pathway Fill

Siemon's RazorCore cable has significantly reduced cable diameter



### 40GBASE-SR4 8-Fiber and 100GBASE-SR4 8-Fiber MTP

(1) 8 strand MTP trunk is used for one link

### Low Loss Versions

Siemon's Plug and Play cable assemblies are also available in low loss multimode for multiple mated pairs in 10/40/100G applications

### Custom Configurations

Available from 8 to 144 fiber counts in increments of 8 fibers

### 40 Gb/s and 100 Gb/s Ready and Beyond



Offers the simplest upgrade path to current and future 8-fiber applications

### Easy Identification

Base 8 assemblies feature a blue boot to easily distinguish from Base 12 assemblies

### Cost-Effective with 100% Fiber Utilization

Base 8 MTP assemblies use 100% of fiber in 8-fiber applications, eliminating the need for conversion cords or modules

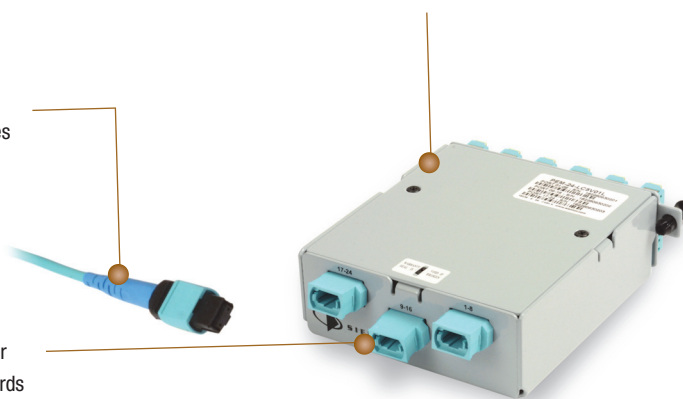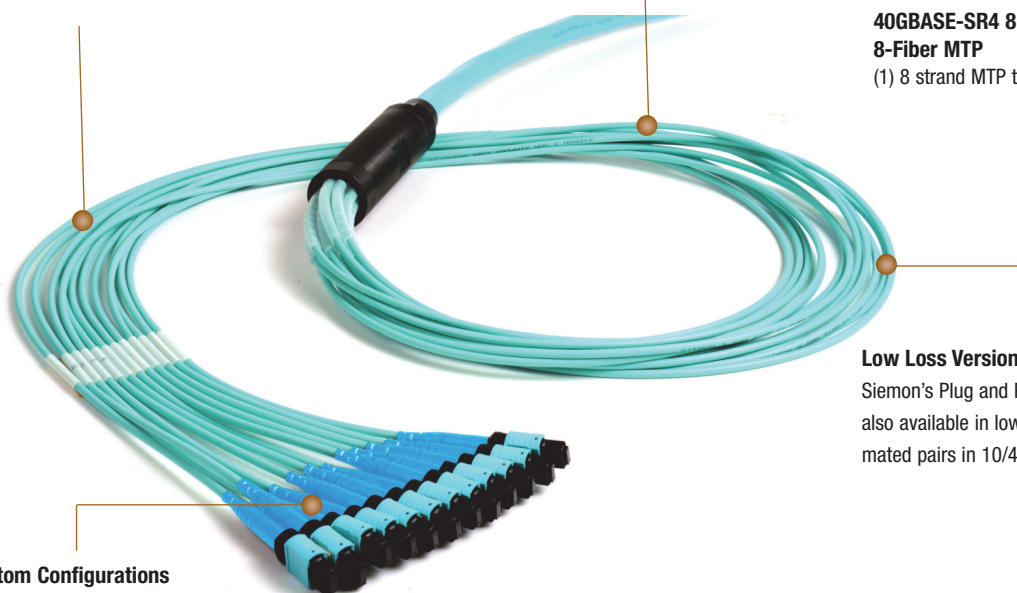



# PRODUCT INFORMATION

## Ordering Information:

G(X)(XXX)(X)(XX)(X)(XXX)(X)-(X)..... Base 8 MTP to MTP assemblies, 8-fibre MTP connectors

**Performance**

R = Standard Loss (SM only)  
L = Low Loss (OM3/OM4 only)

**Fibre Count**

8 = 8 Fibres  
16 = 16 Fibres  
24 = 24 Fibres  
32 = 32 Fibres  
48 = 48 Fibres  
72 = 72 Fibres  
96 = 96 Fibres  
144 = 144 Fibres

**Gender**

- = Female  
M = Male

**Fibre Type**

5L = OM3 XGLO 300 50/125 Multimode, Aqua  
5V = OM4 XGLO 550 50/125 Multimode, Aqua  
EV = OM4, XGLO 550 50/125 Multimode, Erika Violet  
SM = OS1/OS2 Singlemode, Yellow

**Polarity**

A = Method A  
B = Method B  
C = Method C

**Length Unit**


F = Feet  
M = Metre

**Length\***

Length must be 3 digits  
Example: 005 = 5m  
050 = 50 ft.

**Jacket Type**

P = OFNP  
R = OFNR  
L = LSOH

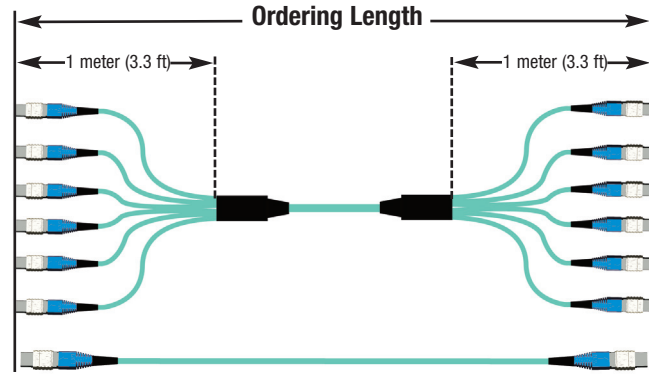

\*\* Order length is measured connector tip to connector tip. Multi-leg versions offered with standard 1 meter (3.3 ft.) legs. Minimum order length is 1 meter (3 ft.) for 8 strand and 3 meters (9 ft.) for 24 strands or greater (See diagram above)





## Cable - Optical and Physical Specifications

Cable Type	Multimode		Singlemode
	XGLO® 50/125 OM3 (850/1300nm)	XGLO 50/125 OM4 (850/1300nm)	XGLO (1310/1383/1550nm)
Fiber Cable Attenuation, MAX (dB/km)	3.0/1.0	3.0/1.0	0.4/0.4/0.3*
LED Bandwidth, MIN (MHz/km)	1500/500	3500/500	N/A
Effective Modal Bandwidth, MIN (MHz/km)	2000	4700	N/A
Cable Outer Jacket, Color (Per TIA-598-C)	Aqua	Aqua	Yellow

\* XGLO Singlemode fiber meets low water peak specifications per ITU-T G.652.C

## Non-Armored Cable & Pulling Eye Assembly

Fiber Strand Count	Cable Diameter mm (in.)			Max Pulling Eye Diameter mm (in.)	*Required Duct Diameter mm (in.)	Max Pull Force kg (lbs)
	Riser	Plenum	LSOH			
8	3.0 (0.12)	3.0 (0.12)	3.0 (0.12)	3.81 (1.5)	69.9 (2.75)	18.1 (40)
16	3.8 (0.15)	3.8 (0.15)	3.8 (0.15)	3.81 (1.5)	69.9 (2.75)	18.1 (40)
24	3.8 (0.15)	3.8 (0.15)	3.8 (0.15)	3.81 (1.5)	69.9 (2.75)	18.1 (40)
32	9.4 (0.37)	7.5 (0.30)	6.5 (0.26)	3.81 (1.5)	69.9 (2.75)	18.1 (40)
48	9.4 (0.37)	7.5 (0.30)	6.5 (0.26)	44.5 (1.75)	88.9 (3.5)	18.1 (40)
72	9.4 (0.37)	7.5 (0.30)	6.5 (0.26)	44.5 (1.75)	88.9 (3.5)	18.1 (40)
96	13.2 (0.52)	13.6 (0.54)	12.5 (0.49)	63.5 (2.5)	108 (4.25)	18.1 (40)
144	13.2 (0.52)	13.6 (0.54)	12.5 (0.49)	80 (3.15)	125 (4.92)	18.1 (40)

\* Pulling eye assembly shall be capable of passing through these minimum duct diameter requirements during product installation

## Connectors - Optical Specifications

Fiber Type	Performance Class	Max Insertion Loss (dB)		Min Return Loss (dB)	
		MTP	LC/SC	MTP	LC/SC
10G 50/125µm Multimode OM3	XGLO 300	0.40	0.25	20	30
10G 50/125µm Multimode OM4	XGLO 550	0.40	0.25	20	30
Laser Optimized 50/125 Multimode OM3	XGLO 300 Low Loss	0.20	0.15	20	30
Laser Optimized 50/125 Multimode OM4	XGLO 550 Low Loss	0.20	0.15	20	30
Singlemode OS2	XGLO	0.60	0.40	60	55

## Connectors - Physical Specifications

Connector Type	IEC Intermateability Compliance	TIA Intermateability Compliance	Housing Color		Boot Color	
			SM	MM-5L/5V	SM	MM
8-Fiber MTP	IEC 61754-7	TIA/EIA-604-5	Green	Aqua	Blue	Blue

Because we continuously improve our products, Siemon reserves the right to change specifications and availability without prior notice.

**Worldwide Headquarters  
North America**  
Watertown, CT USA  
Phone (1) 860 945 4200

**Regional Headquarters  
Europe Russia Africa**  
Chertsey, Surrey, England  
Phone (44) 0 1932 571771

**Regional Headquarters  
China**  
Shanghai, P.R. China  
Phone (86) 215385 0303

**Regional Headquarters  
Latin America**  
Bogota, Colombia  
Phone (571) 657 1950/51/52

**Regional Headquarters  
India Middle East**  
Dubai, United Arab Emirates  
Phone (971) 4 3689743

**Regional Headquarters  
Asia Pacific**  
Sydney, Australia  
Phone (61) 2 8977 7500

**Siemon Interconnect Solutions  
Watertown, CT USA**  
Phone (1) 860 945 4213 US  
www.siemon.com/SIS

