

Base 8 MTP® to LC BladePatch® 4 X 10G Hybrid Equipment Cords

Utilising high quality Siemon RazorCore™ cable, Base 8 MTP to LC BladePatch 4X10 equipment cords offer a connectivity transition from one 8-fibre MTP connector to four duplex LC BladePatch connectors that feature an innovative push-pull boot design to control the latch, enabling easy access and removal in tight-fitting areas.

Multiple Fiber Types

Available in multimode (laser optimized 50/125 OM3 and OM4) and singlemode

Small Diameter

RazorCore fiber cable improves cable management and pathway fill

Easy Identification

Base 8 MTP solutions feature a blue boot to easily distinguish from Base 12 solutions

Enhanced Installation and Removal

Innovative and patented LC BladePatch, push-pull boot design for easy access in high density environment


Low Profile Boot

Optimizes side-stackability

Note: Fits with any standard LC opening or LC SFP module. Compatible with industry compliant non-shutter LC adapters. When using internal shutter LC adapters, the LC BladePatch is only compatible with the Siemon version.

40G to 4 X 10G Channel


Example Channel Model

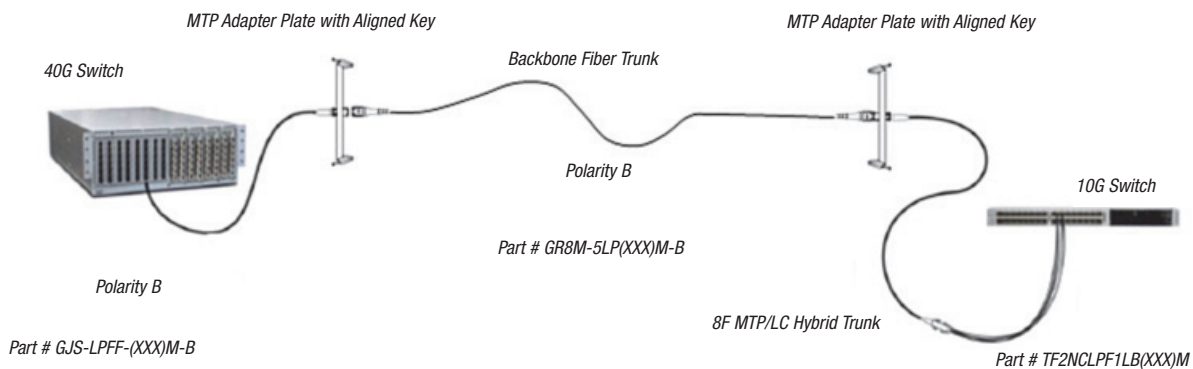



Ordering Information:

T(X)2(X)(X)(X)(X)(X)(X)(XX)(XXX)(X) Base 8 MTP to LC BladePatch Equipment Cords

<p>Performance F = Standard Loss (SM only) L = Low Loss (OM3/OM4 only)</p> <p>Fibre Count N = 8 Strand</p> <p>Pulling Eye Option A = MTP Side (for lengths > 5m only) C = None</p> <p>Fibre Type L = OM3, XGLO 300 50/125 Multimode Aqua V = OM4, XGLO 550 50/125 Multimode Aqua E = OM4, XGLO 550 50/125 Multimode Erika Violet A = OS1/OS2, Singlemode Yellow</p> <p>Jacket Rating P = Plenum R = Riser L = LSOH</p>	<p>Length Length must be 3 digits Example: 003 = 3m 010 = 10 ft.</p> <p>LC BP Connector LB = Reverse Fibre Position (RFP) BL = Continuous Fibre Position (CFP)</p> <p>Stagger Type 1 = No Stagger</p> <p>MTP Gender M = Male F = Female</p>	<p>Length Unit F = Feet M = Metre</p>
--	--	--

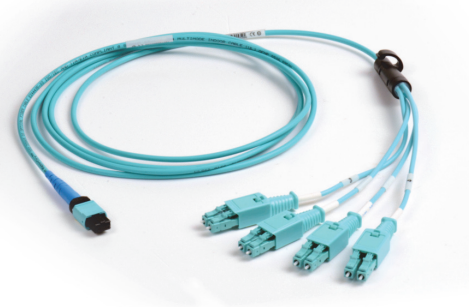

* Minimum order length is 1 meter (3.28 ft.). Order length is measured connector tip to connector tip.
 Trunks greater than 1 meter (3.28 ft.) have breakout length of 1 meter (3.28 ft.) 1 meter (3.28 ft.) trunks have a 50cm (1.64 ft.) breakout length (See diagram below)

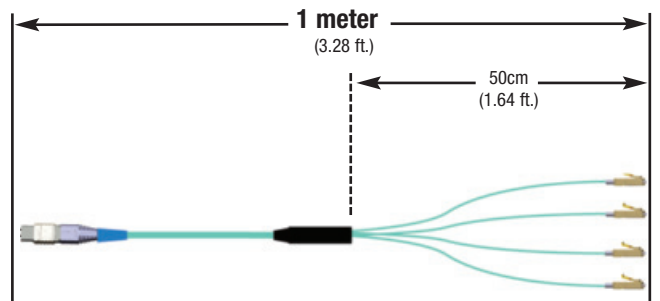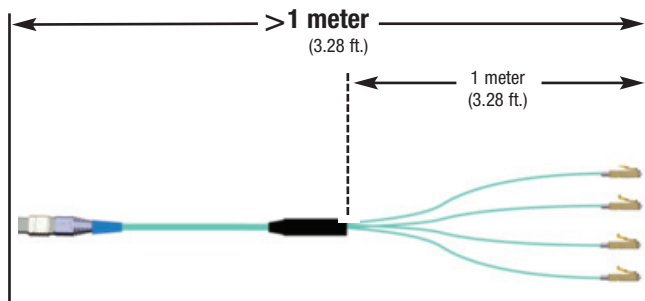

Cable - Optical and Physical Specifications

Cable Type	Multimode		Singlemode
	XGLO 50/125 OM3 (850/1300nm)	XGLO 50/125 OM4 (850/1300nm)	XGLO (1310/1383/1550nm)
Fiber Cable Attenuation MAX (db/km)	3.0/1.0	3.0/1.0	0.4/0.4/0.3*
LED Bandwidth, MIN (MHz/km)	1500/500	3500/500	N/A
Effective Modal Bandwidth, MIN (MHz/km)	2000	4700	N/A
Cable Outer Jacket, Color (Per TIA-598-C)	Aqua	Aqua	Yellow

* XGLO Singlemode fiber meets low water peak specifications per ITU-T G.652.C

Non-Armored Cable & Pulling Eye Assembly

Fiber Strand Count	Cable Diameter			Max Pulling Eye Diameter mm (in)	*Required Duct Diameter mm (in)	Max Pull Force kg (lbs)
	Riser	Plenum	LSOH			
8	3.0 (.12)	3.0 (.12)	3.0 (.12)	3.81 (1.5)	69.9 (2.75)	18.1 (40)
16	3.8 (.15)	3.8 (.15)	3.8 (.15)	3.81 (1.5)	69.9 (2.75)	18.1 (40)
24	3.8 (.15)	3.8 (.15)	3.8 (.15)	3.81 (1.5)	69.9 (2.75)	18.1 (40)
32	9.4 (.37)	7.5 (.30)	6.5 (.26)	3.81 (1.5)	69.9 (2.75)	18.1 (40)
48	9.4 (.37)	7.5 (.30)	6.5 (.26)	44.5 (1.75)	88.9 (3.5)	18.1 (40)
72	9.4 (.37)	7.5 (.30)	6.5 (.26)	44.5 (1.75)	88.9 (3.5)	18.1 (40)
96	13.2 (.52)	13.6 (.54)	12.5 (.49)	63.5 (2.5)	108 (4.25)	18.1 (40)
144	13.2 (.52)	13.6 (.54)	12.5 (.49)	80 (3.15)	125 (4.92)	18.1 (40)

* Pulling eye assembly shall be capable of passing through these minimum duct diameter requirements during product installation

Connectors - Optical Specifications

Fiber Type	Performance Class	Max Insertion Loss (db)		Min Return Loss (db)	
		MTP	LC/SC	MTP	LC/SC
10G 50/125µm Multimode OM3	XGLO 300	0.40	0.25	20	30
10G 50/125µm Multimode OM4	XGLO 550	0.40	0.25	20	30
Laser Optimized 50/125 Multimode OM3	XGLO 300 Low Loss	0.20	0.15	20	30
Laser Optimized 50/125 Multimode OM4	XGLO 550 Low Loss	0.20	0.15	20	30
Singlemode OS2	XGLO	0.60	0.40	60	55

Connectors - Physical Specifications

Connector Type	IEC Intermateability Compliance	TIA Intermateability Compliance	Housing Color		Boot Color	
			SM	MM-5L/5V	SM	MM
8-Fiber MTP	IEC 61754-7	TIA/EIA-604-5	Green	Aqua	Blue	Blue

Because we continuously improve our products, Siemon reserves the right to change specifications and availability without prior notice.

Worldwide Headquarters
North America
 Watertown, CT USA
 Phone (1) 860 945 4200

Regional Headquarters
Europe Russia Africa
 Chertsey, Surrey, England
 Phone (44) 0 1932 571771

Regional Headquarters
China
 Shanghai, P.R. China
 Phone (86) 215385 0303

Regional Headquarters
Latin America
 Bogota, Colombia
 Phone (571) 657 1950/51/52

Regional Headquarters
India Middle East
 Dubai, United Arab Emirates
 Phone (971) 4 3689743

Regional Headquarters
Asia Pacific
 Sydney, Australia
 Phone (61) 2 8977 7500

Siemon Interconnect Solutions
Watertown, CT USA
 Phone (1) 860 945 4213 US
www.siemon.com/SIS