


Category 6A GT UTP LSOH 4-Pair Cable

Siemon's Category 6A Gap Technology (GT) UTP LSOH cable features a discontinuous foil construction which enables a typical UTP installation process and smaller cable diameter while providing improved heat dissipation and virtually zero alien crosstalk. These properties make this cable ideal for supporting applications using both remote powering and 10 Gb/s application speeds such as IEEE 802.11ac or IEEE 802.11ax wireless access points or other high speed emerging or converging IP building automation technologies.

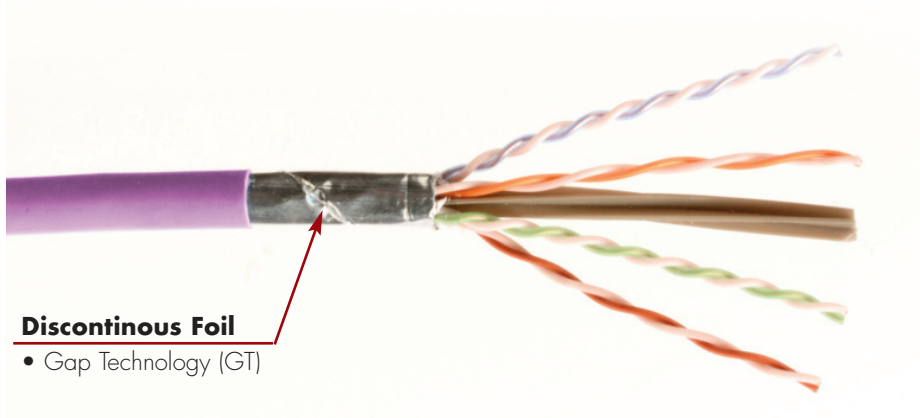

Discontinuous Foil

- Gap Technology (GT)

CABLE CONSTRUCTION

- GT UTP LSOH
- 0.56mm (.022 in.) 23 AWG solid bare copper
- 7.7mm (.303 in.) nom. jacket diameter
- Central isolation member
- Discontinuous foil aluminum polyester tape applied over the core
- Reverse sequential measurement markings on jacket


COMPLIANCE

- ANSI/TIA-568-C.2
- IEC 61156-5 Ed 2.0
- ISO/IEC 11801 Ed 2.0
- IEC 60332-1
- IEC 60332-3-22
- IEC 60754-2, 61034
- EN50575 Eca

APPLICATIONS SUPPORT

- 10GBASE-T
- 1000BASE-T
- 100BASE-T
- 10BASE-T
- IEEE 802.3af (Type 1 PoE)
- IEEE 802.3at (Type 2 PoE)
- IEEE 802.3bt (Type 3 PoE)
- IEEE 802.3bt (Type 4 PoE)
- Power over HDBaseT (PoH)

Supports all applications designed for category 6A or lower cabling

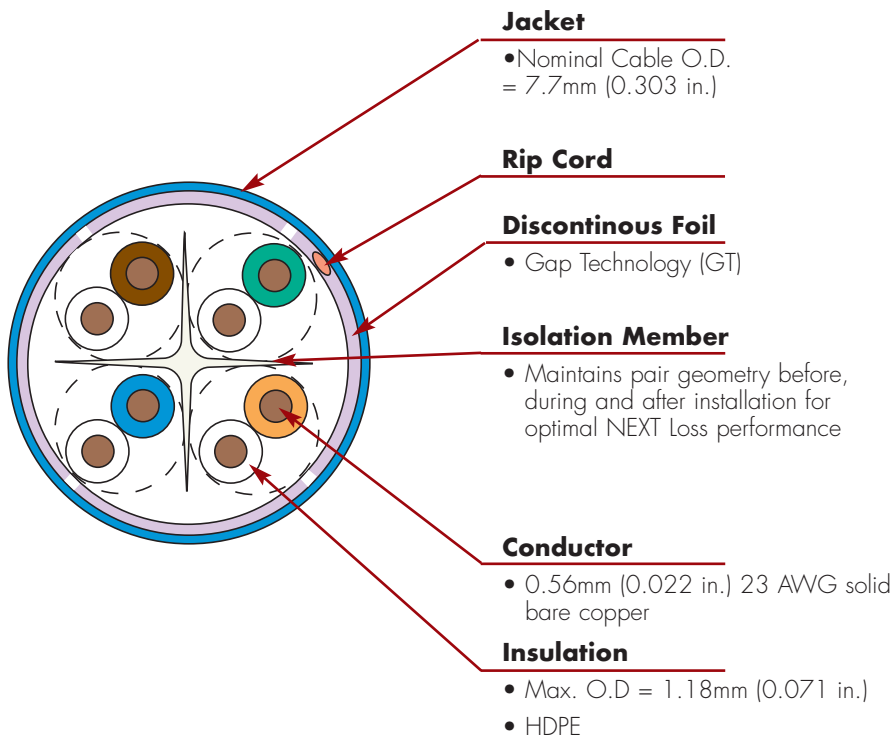

Product Information

Ordering Information:

9U6L4-A5-08-R1N LSOH (IEC 60332-1, IEC 60332-3-22), violet jacket, 305m reel

Other colors and put-ups available with longer lead times and MOQ's. Please contact Customer Service for details.

ELECTRICAL SPECIFICATIONS

DC Resistance	≤8 Ω/100m
DC Resistance Unbalance	within pairs ≤ 2%
	between pairs ≤ 5%
Mutual Capacitance	Nom. 4.3 nf/100m
Capacitance Unbalance	≤160 pf/100m
NVP	66%
TCL	≥50-10* log(f/100) dB
Delay Skew	≤45 ns

PHYSICAL PROPERTIES

	LSOH
Pulling Tension (max)	100N (22 lbf)
Bend Radius (min)	30.8mm (1.2 in.)
Installation Temperature	0 to 50°C (+32 to 122°F)
Storage Temperature	-20 to 75°C (-4 to 167°F)
Operating Temperature	-20 to 75°C (-4 to 167°F)

TRANSMISSION PERFORMANCE

GUARANTEED WORST CASE SIEMON TYPICAL

Frequency (MHz)	Insertion Loss (dB)		NEXT (dB)		PS NEXT (dB)		ACR-F (dB)		PS ACR-F (dB)		Return Loss (dB)		ACR-N (dB)		PS ACR-N (dB)		Propagation Delay (ns)	
	Guaranteed Worst Case	Siemon Typical	Guaranteed Worst Case	Siemon Typical	Guaranteed Worst Case	Siemon Typical	Guaranteed Worst Case	Siemon Typical	Guaranteed Worst Case	Siemon Typical	Guaranteed Worst Case	Siemon Typical	Guaranteed Worst Case	Siemon Typical	Guaranteed Worst Case	Siemon Typical	Guaranteed Worst Case	Siemon Typical
1.0	2.1	2.1	75.3	81.9	73.3	79.9	73.3	78.3	71.3	76.1	20.0	30.9	73.2	79.9	71.2	77.9	570	557
4.0	3.8	3.7	66.3	79.4	64.3	78.5	61.3	76.7	59.3	76.3	23.0	33.4	62.5	76.0	60.5	75.0	552	541
10.0	5.9	5.7	60.3	74.8	58.3	72.7	53.3	70.1	51.3	69.4	25.0	32.5	54.4	69.4	52.4	67.0	545	535
16.0	7.5	7.1	57.2	72.0	55.2	69.7	49.2	65.7	47.2	64.8	25.0	28.9	49.8	65.5	47.8	62.6	543	533
20.0	8.4	8.0	55.8	68.7	53.8	67.1	47.3	63.1	45.3	62.0	25.0	32.9	47.4	61.1	45.4	59.3	542	532
31.25	10.5	10.0	52.9	67.7	50.9	64.6	43.4	57.3	41.4	56.9	23.7	32.6	42.4	58.3	40.4	54.6	540	531
62.5	15.0	14.3	48.4	62.6	46.4	59.3	37.4	52.6	35.4	50.9	21.5	29.2	33.4	48.7	31.4	45.3	539	529
100.0	19.1	18.3	45.3	59.2	43.3	58.0	33.3	54.2	31.3	51.4	20.1	31.8	26.2	42.4	24.2	40.9	538	528
160.0	24.5	23.3	42.2	54.8	40.2	53.6	29.2	47.6	27.2	46.7	18.7	27.2	17.7	33.4	15.7	30.8	537	527
200.0	27.6	26.2	40.8	52.1	38.8	50.4	27.3	44.2	25.3	44.3	18.0	29.6	13.2	27.4	11.2	24.2	537	527
250.0	31.1	29.4	39.3	51.6	37.3	48.5	25.3	41.7	23.3	39.7	17.3	30.8	8.3	23.9	6.3	19.8	536	527
300.0	34.3	32.4	38.1	50.7	36.1	47.6	23.8	38.5	21.8	38.2	17.3	26.0	3.9	19.8	1.9	16.4	536	527
400.0	40.1	37.8	36.3	46.7	34.3	45.4	21.3	34.9	19.3	33.2	17.3	26.6	-3.8	11.1	-5.8	7.9	536	526
500.0	45.3	42.4	34.8	43.2	32.8	41.6	19.3	39.5	17.3	38.5	17.3	25.2	-10.4	3.2	-12.4	-0.8	536	526
550.0*	-	44.6	-	44.2	-	42.6	-	35.1	-	32.0	-	26.5	-	1.9	-	-0.9	-	526
650.0*	-	48.9	-	41.6	-	39.6	-	32.2	-	28.8	-	20.3	-	-4.9	-	-8.1	-	526

*Values above 500 MHz are informational only.

All performance based on 100 meters (328 ft.)

Because we continuously improve our products, Siemon reserves the right to change specifications and availability without prior notice.

**Worldwide Headquarters
North America**
Watertown, CT USA
Phone (1) 860 945 4200

**Regional Headquarters
Europe Russia Africa**
Chertsey, Surrey, England
Phone (44) 0 1932 571771

**Regional Headquarters
China**
Shanghai, P.R. China
Phone (86) 215385 0303

**Regional Headquarters
Latin America**
Bogota, Colombia
Phone (571) 657 1950/51/52

**Regional Headquarters
India Middle East**
Dubai, United Arab Emirates
Phone (971) 4 3689743

**Regional Headquarters
Asia Pacific**
Sydney, Australia
Phone (86) 21 5385 0303

**Siemon Interconnect Solutions
Watertown, CT USA**
Phone (1) 860 945 4213 US
www.siemon.com/SIS

