



# CATEGORY 6A U/FTP CABLE

## - International

Siemon's Category 6A U/FTP cable supports channel performance exceeding ANSI/TIA-568.2-D and ISO/IEC 11801 Class E<sub>A</sub> requirements. When combined with our Z-MAX 6A Shielded connectivity, the result is a channel capable of supporting 10GBASE-T operation over 100-metre, 4-connector topologies. In addition the screened construction ensures virtually zero alien crosstalk. The Category 6A U/FTP cabling system supports emerging and converging IP applications like Voice Over IP (VoIP), IP video and future 10 gigabit applications.

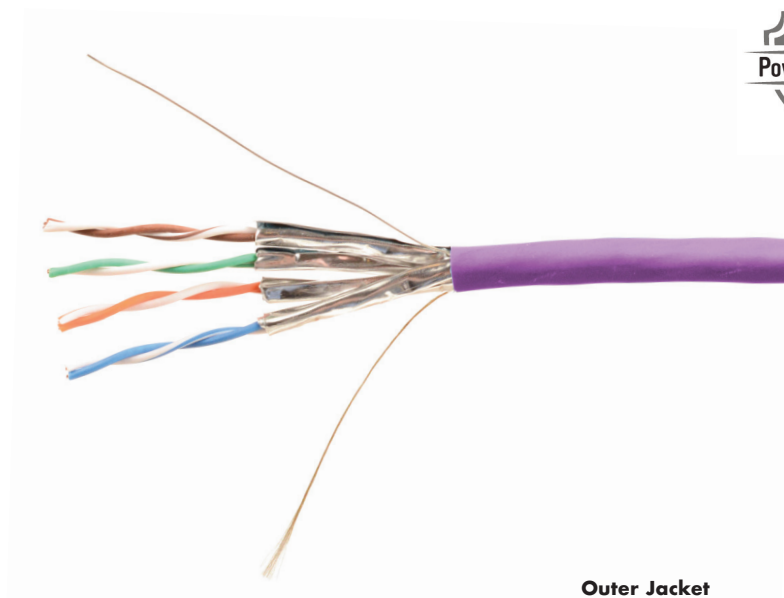

Siemon's PowerGUARD technology with a 75°C operating temperature improves heat dissipation for reduced length derating and bundling requirements in remote powering applications, including PoE and power over HDBaseT (POH).

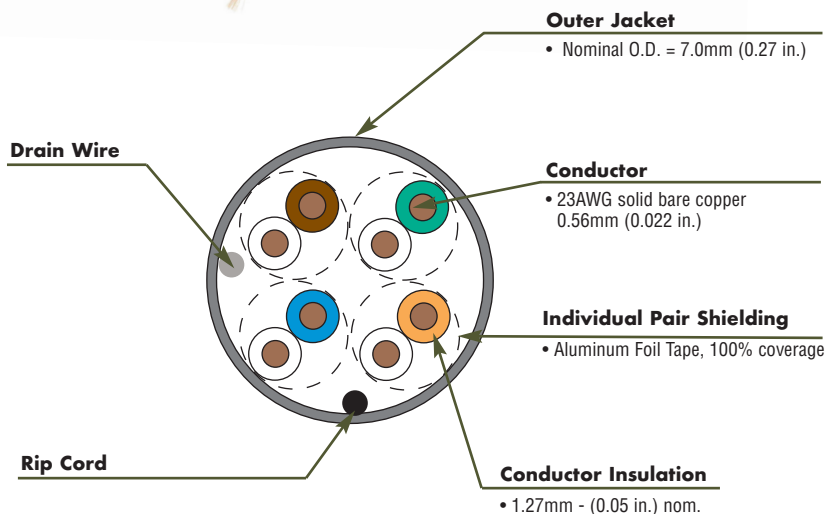

### COMPLIANCE

- ANSI/TIA-568.2-D
- IEC 61156-5 Ed 2.0
- ISO/IEC 11801-1 Ed 1.0
- CM: UL listed, IEC 60332-1
- LSOH: IEC 60332-1, IEC 60754, and IEC 61034
- LSOH: EN 50575 Class D<sub>ca</sub>, s<sub>2</sub>, d<sub>2</sub>, a<sub>1</sub>

### CABLE CONSTRUCTION

- UFTP
- Reverse sequential numbering
- Round jacket
- Drain wire
- Rip cord

### APPLICATION SUPPORT

- 10GBASE-T
- 1000BASE-T
- 100BASE-T
- 10BASE-T
- IEEE 802.3af (Type 1 PoE)
- IEEE 802.3at (Type 2 PoE)
- IEEE 802.3bt (Type 3 PoE)
- IEEE 802.3bt (Type 4 PoE)
- Power over HDBaseT (PoH)

*Supports all applications designed for category 6A or lower cabling*

# PRODUCT INFORMATION

## ELECTRICAL SPECIFICATIONS

DC Resistance	<9.5 ≤/100m
DC Resistance Unbalance	2%
Mutual Capacitance	5.6 nF/100m
Capacitance Unbalance	<160 pF/100m
Characteristic Impedance (ohms)	1-100 MHz: 100 ± 15% 100-750 MHz: 100 ± 22%
NVP	72%
TCL	30-10 log(f/100) dB
Delay Skew	≤45ns
PoE	Suitable for PoE Type1,2,3,4 and PoH

## PHYSICAL PROPERTIES

	CM/LSOH
Pulling Tension (max)	80N (18 lbs -Force)
Bend Radius (min)	56mm
Installation Temperature	0 to 60°C
Storage Temperature	-20 to 75°C
Operating Temperature	-20 to 75°C

## TRANSMISSION PERFORMANCE

GUARANTEED WORST CASE
  SIEMON TYPICAL

Frequency (MHz)	Insertion Loss (dB)		NEXT (dB)		PSNEXT (dB)		ACR (dB)		PSACR (dB)		ACR-F (dB)		PSACR-F (dB)		Return Loss (dB)		Propagation Delay (ns)	
	Guaranteed Worst Case	Siemon Typical	Guaranteed Worst Case	Siemon Typical	Guaranteed Worst Case	Siemon Typical	Guaranteed Worst Case	Siemon Typical	Guaranteed Worst Case	Siemon Typical	Guaranteed Worst Case	Siemon Typical	Guaranteed Worst Case	Siemon Typical	Guaranteed Worst Case	Siemon Typical	Guaranteed Worst Case	Siemon Typical
1	2.1	1.9	-75.3	-96.9	-73.3	-95.9	-73.2	-95.0	-71.2	-94.0	-73.3	-97.7	-71.3	-96.8	-20.0	-22.8	570	453
4	3.8	3.5	-66.3	-96.1	-64.3	-93.3	-62.5	-92.5	-60.5	-89.8	-61.3	-97.8	-59.3	-95.3	-23.0	-25.6	552	445
10	5.9	5.5	-60.3	-86.4	-58.3	-84.1	-54.4	-80.9	-52.4	-78.6	-53.3	-87.8	-51.3	-86.2	-25.0	-31.4	545	440
16	7.5	7.0	-57.2	-83.0	-55.2	-80.7	-49.8	-76.0	-47.8	-73.7	-49.2	-79.2	-47.2	-77.2	-25.0	-31.4	543	439
20	8.4	7.9	-55.8	-81.6	-53.8	-79.1	-47.4	-73.8	-45.4	-71.2	-47.3	-77.8	-45.3	-77.0	-25.0	-33.0	542	438
31.25	10.5	10.0	-52.9	-80.1	-50.9	-78.6	-42.4	-70.1	-40.4	-68.6	-43.4	-85.0	-41.4	-82.0	-23.6	-34.2	540	438
62.5	15.0	14.2	-48.4	-83.7	-46.4	-81.3	-33.4	-69.8	-31.4	-67.1	-37.4	-80.1	-35.4	-79.2	-21.5	-32.0	539	437
100	19.1	18.0	-45.3	-80.2	-43.3	-77.6	-26.2	-62.3	-24.2	-59.7	-33.3	-79.3	-31.3	-77.0	-20.1	-37.3	538	436
200	27.6	25.5	-40.8	-74.2	-38.8	-71.4	-13.2	-48.7	-11.2	-45.9	-27.3	-71.0	-25.3	-68.9	-18.0	-30.3	537	436
250	31.1	28.6	-39.3	-73.8	-37.3	-70.9	-8.3	-45.5	-6.3	-42.3	-25.3	-71.2	-23.3	-70.4	-17.3	-27.1	536	436
300	34.3	31.3	-38.1	-70.9	-36.1	-68.8	-3.9	-39.5	-1.9	-37.5	-23.8	-66.1	-21.8	-65.2	-17.3	-25.5	536	435
400	40.1	36.5	-36.3	-69.4	-34.3	-66.5	3.8	-33.3	5.8	-30.7	-21.3	-60.8	-19.3	-56.9	-17.3	-20.8	536	435
500	45.3	40.8	-34.8	-65.7	-32.8	-63.5	10.4	-25.5	12.4	-22.7	-19.3	-58.3	-17.3	-56.0	-17.3	-22.1	536	435
550*	-	43.1	-	-60.0	-	-57.1	-	-17.5	-	-14.0	-	-49.7	-	-48.3	-	-22.8	-	428
625*	-	45.7	-	-56.8	-	-54.5	-	-11.9	-	-9.0	-	-46.8	-	-45.6	-	-21.0	-	428
750*	-	50.8	-	-58.6	-	-57.5	-	-7.8	-	-6.7	-	-39.5	-	-37.5	-	-18.8	-	425

\* Values for frequencies beyond industry requirements are for information only  
All performance based on 100-meters

### Category 6A 4-pair U/FTP Cable:

9D6M4-A5 .....PVC (CM, IEC 60332-1), Gray Jacket, 305m Reel

9D6L4-A5 .....LSOH (IEC 60332-1), Violet Jacket, 305m Reel, D<sub>ca</sub>, S<sub>2</sub>, d<sub>2</sub>, a<sub>1</sub>

Other cable lengths also available: Add "-5CR" for 500m Reel, "-1KR" for 1000m Reel

Because we continuously improve our products, Siemon reserves the right to change specifications and availability without prior notice.

### For additional resource information:

Visit our web site at [www.siemon.com](http://www.siemon.com)

#### Worldwide Headquarters North America

Watertown, CT USA  
Phone (1) 860 945 4200 US  
Phone (1) 888 425 6165

#### Regional Headquarters EMEA

Europe/Middle East/Africa  
Surrey, England  
Phone (44) 0 1932 571771

#### Regional Headquarters Asia/Pacific

Shanghai, P.R. China  
Phone (86) 21 5385 0303

#### Regional Headquarters Latin America

Bogota, Colombia  
Phone (571) 657 1950