

Category 8.2 E20 LSFROH S/FTP Cable - International

Siemon's Category 8.2 cable exceeds the transmission performance requirements of IEC 61156-9 up to 2000 MHz. This fully shielded cable supports 30-meter Class II to meet IEEE 802.3bq 25 Gb/s (25GBASE-T) and 40 Gb/s (40GBASE-T) applications in the data center. As part of a Class II twisted-pair cabling system which shares open and common specifications, interoperability and backwards compatibility are ensured with the reach to support a broad range of architectures for switch-to-server connections, including switches placed in top of rack (ToR), middle of row (MoR) and end of row (EoR). With an LSFROH cable jacket qualified for mechanical reliability in high temperature environments up to 75°C, Siemon's S/FTP Category 8.2 cable features individual foils around each pair and a high screen coverage outer braid to provide superior noise immunity and coupling attenuation performance.



Siemon's **PowerGUARD** technology with a 75°C operating temperature improves heat dissipation for reduced length derating and bundling requirements in remote powering applications, including PoE and power over HDBaseT (POH).



CABLE FEATURES


- S/FTP
- LSFROH Nominal Jacket OD: 8.2 (0.323 in.)
- 22 AWG 0.62 (0.024 in.) solid bare copper
- Pairs individually shielded with aluminum bonded polyester tape
- 75° temperature rating

STANDARDS COMPLIANCE

- ISO/IEC 11801-1
- EN 50173-1
- IEC 61156-9
- LSFROH: ISO/IEC 60332-3-24, IEC 61034 and IEC 60754
- LSOH: EN 50575 Class Dca, s2, d2, a1

APPLICATIONS SUPPORT

- 10BASE-T to 40GBASE-T
- IEEE 802.3 af (Type 1 PoE)
- IEEE 802.3 at (Type 2 PoE)
- IEEE 802.3 bt (Type 3 PoE)
- IEEE 802.3 bt (Type 4 PoE)
- Power Over HDBaseT (PoH)

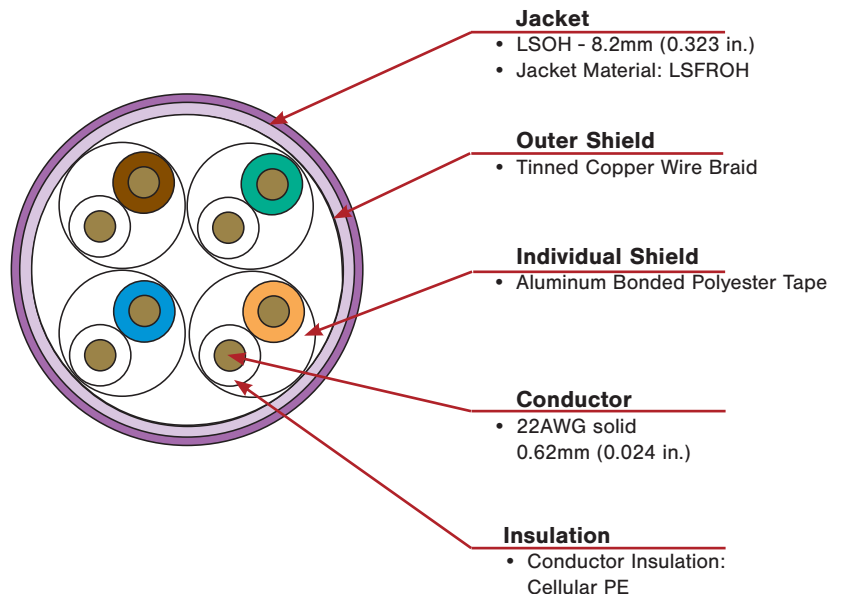

Product Information

ELECTRICAL SPECIFICATIONS

DC Resistance	< 2.1 Ω/30m
DC Resistance Unbalance	within pairs ≤ 2% between pairs ≤ 5%
Mutual Capacitance	1.29 pF/30m
Characteristic Impedance (ohms)	100 MHz: 100 ± 5%
NVP	76%
TCL	≥ 50-15 x log (f)dB
Delay Skew	≤ 7.5ns/30m

PHYSICAL PROPERTIES

LSOH	
Pulling Tension (max)	110N (25 lbf)
Bend Radius (min)	32mm (1.3 in.)
Installation Temperature	0 to 75°C (+32 to 167°F)
Storage Temperature	-20 to 75°C (-4 to 167°F)
Operating Temperature	-20 to 75°C (-4 to 167°F)

TRANSMISSION PERFORMANCE



GUARANTEED WORST CASE



SIEMON TYPICAL

Frequency (MHz)	Insertion Loss (dB/100)		NEXT (dB)		PS NEXT (dB)		ACR (dB)		PSACR (dB)		ACR-F (dB)		PS ACR-F (dB)		Return Loss (dB)		Propagation Delay (ns)	
1	1.1	0.7	78.0	80.9	75.0	88.0	76.9	80.2	73.9	87.4	78.0	85.6	75.0	84.1	20.0	21.6	171.0	144.0
4	1.1	1.1	78.0	91.3	75.0	96.2	76.9	90.2	73.9	95.1	78.0	92.7	75.0	90.7	23.1	31.8	165.4	140.0
10	1.8	1.6	78.0	99.6	75.0	96.2	76.2	98.0	73.2	94.6	78.0	97.3	75.0	95.5	25.0	35.9	163.4	138.0
16	2.2	2.1	78.0	101.0	75.0	89.6	75.8	98.9	72.8	87.5	76.5	101.0	73.5	95.8	25.0	29.8	162.8	137.0
20	2.5	2.3	78.0	98.1	75.0	96.5	75.5	95.8	72.5	94.2	74.7	95.9	71.6	94.2	25.0	30.6	162.5	137.0
31.25	3.2	3.0	78.0	98.2	75.0	97.9	74.8	95.2	71.8	94.9	70.7	95.2	67.7	92.5	25.0	30.2	162.0	136.0
62.5	4.5	4.2	78.0	101.0	75.0	92.2	73.5	96.8	70.5	88.0	64.7	93.9	61.7	89.8	23.6	32.5	161.4	136.0
100	5.5	5.1	75.4	100.0	72.4	94.7	69.9	94.9	66.9	89.6	60.6	92.7	57.6	89.4	22.2	34.6	161.1	136.0
200	7.9	7.3	70.9	101.0	67.9	89.5	63.0	93.7	60.0	82.2	54.6	91.0	51.6	85.2	20.1	30.8	160.8	135.0
250	8.9	8.2	69.4	99.1	66.4	88.2	60.5	90.9	57.5	80.0	52.6	88.3	49.6	85.6	19.4	26.6	160.7	135.0
300	9.8	9.0	68.2	99.3	65.2	88.7	58.4	90.3	55.4	79.7	51.1	86.0	48.1	84.3	18.8	20.4	160.6	135.0
350	10.6	9.8	67.2	97.2	64.2	86.1	56.6	87.4	53.6	76.3	49.7	84.1	46.7	81.6	18.4	29.4	160.6	135.0
400	11.4	10.4	66.4	101.0	63.4	88.3	55.0	90.6	52.0	77.9	48.6	85.2	45.6	80.8	18.0	26.6	160.6	135.0
550	13.5	12.3	64.3	97.3	61.3	85.5	50.8	85.0	47.8	73.2	45.8	80.9	42.8	80.4	17.0	29.5	160.5	135.0
600	14.1	12.9	63.7	99.5	60.7	84.8	49.6	86.6	46.6	71.9	45.0	80.0	42.0	80.0	16.8	23.1	160.5	135.0
800	16.5	14.9	61.8	93.9	58.9	81.0	45.3	79.0	42.4	66.1	42.5	78.2	39.5	74.1	15.9	26.0	160.4	135.0
900	17.6	17.6	61.1	97.3	58.1	78.7	43.5	79.7	40.5	61.1	41.5	77.4	38.5	73.6	15.5	28.5	160.4	135.0
1000	18.6	16.7	60.4	96.1	57.4	79.9	41.8	79.4	38.8	63.2	40.6	76.5	37.6	72.7	15.2	32.7	160.3	135.0
1600	24.0	21.6	57.3	97.5	54.3	74.1	33.3	75.9	30.3	52.5	36.5	69.7	33.5	67.6	13.8	19.5	160.3	135.0
2000	27.2	24.6	55.9	87.9	52.9	64.9	28.7	63.3	25.7	40.3	34.6	64.2	31.6	63.3	13.1	19.4	160.3	135.0

All performance based on 30 meters

Ordering Information

Part Number Description

9T82H4-E2008R1N...LSFROH (IEC 60332-3-24),Violet Jacket, 305m

9T82H4-E2008R2N...LSFROH (IEC 60332-3-24),Violet Jacket, 500m

Because we continuously improve our products, Siemon reserves the right to change specifications and availability without prior notice.

North America

P: (1) 860 945 4200

Asia Pacific

P: (61) 2 8977 7500

Latin America

P: (571) 657 1950/51/52

Europe

P: (44) 0 1932 571771

China

P: (86) 215385 0303

India Middle East

P: (971) 4 3689743

Siemon Interconnect Solutions

P: (1) 860 945 4213
www.siemon.com/SIS

WWW.SIEMON.COM

