


# MC<sup>®</sup> 5e UTP Modular Cords - International

Simon's MC series category 5e modular cords are key components to ensure optimum channel performance of our category 5e UTP systems. The cable used to manufacture the category 5e patch cords exceeds the specifications set forth by both ANSI/TIA-568.2-D and ISO/IEC 11801-1 Ed 1.0

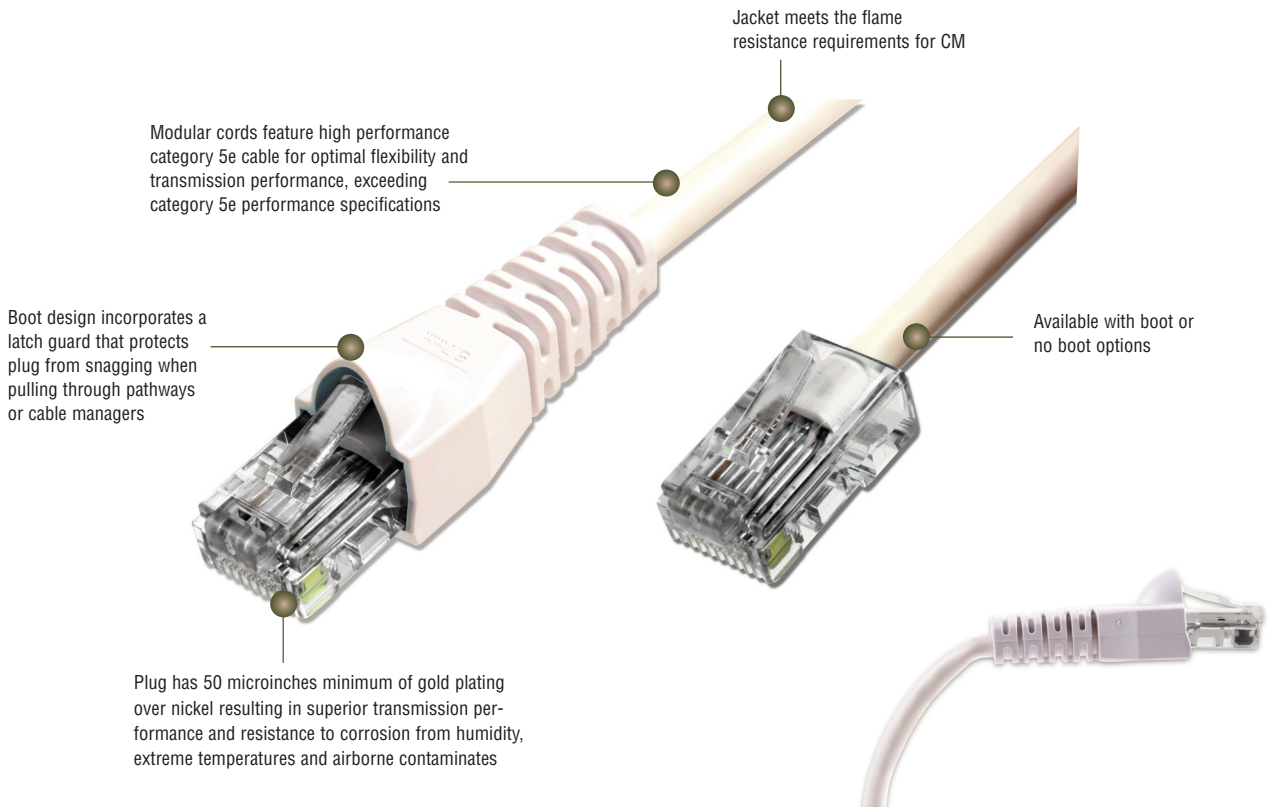

## Excellent Bend Relief

Boot and integrated strain relief ensures proper bend relief, critical for category 5e performance



## STANDARDS COMPLIANCE

- ANSI/TIA-568.2-D
- ISO/IEC 11801-1 Ed 1.0
- IEEE 802.3af (Type 1 PoE)
- IEEE 802.3at (Type 2 PoE)
- IEEE 802.3bt (Type 3 PoE)
- IEEE 802.3bt (Type 4 PoE)
- Power over HDBaseT (PoH)
- IEC 60603-7
- cUL US Listed
- TIA-968-A (formerly FCC Part 68 Subpart F)

# PRODUCT INFORMATION

## Performance Specifications:

ELECTRICAL	
Contact Resistance	20 mΩ
Input to Output DC Resistance	200 mΩ
Min. Dielectric Withstand Voltage (contact to contact)	1000 V DC or AC peak
Insulation Resistance	500 mΩ
Current Rating @ 25° C	1.5 A
Power over Ethernet	Suitable for PoE Type 1,2,3,4 and PoH
MECHANICAL — GENERAL	
Operating Temperature	-10 to 60 °C, (14 to 140 °F)
Flammability Rating	UL 94 - V0
Green Features	RoHS
Contact Materials	Copper alloy with contact plating of 50 micro inches gold or equivalent
Plastic Materials	Flame retardant thermoplastic
Marking	P/N, length, performance level, QC
MECHANICAL — PLUG	
Number of Plug Insertion Cycles	750
Min. Plug Retention Force	50N (11.24 lbf)
Plug Compatibility	Compatible with RJ45 outlets

MECHANICAL — CABLE (STRANDED)	
Wire Size Range (nominal)	26 AWG 7x34 Stranded tinned copper
Cable Construction	UTP
Cable O.D. (nominal)	4.9mm (0.19 in.)
Wiring	T568B*
Jacket Type	CM
Bend Radius	6mm (0.24 in.)

\* Double-ended cords wired T568B are suitable for both T568A & T568B applications

## MC 5e UTP Modular Cords

MC category 5e, double-ended, 4-pair UTP stranded modular patch cord, booted and non-booted options available.

MC5-(XX)M-(XX)(XX)	
<b>Cord Length</b> <b>01</b> = 1m (3.2 ft.) <b>1.5</b> = 1.5m (5 ft.) <b>02</b> = 2m (6.5 ft.) <b>03</b> = 3m (9.8 ft.) <b>05</b> = 5m (16.4 ft.) <b>7.5</b> = 7.5m	<b>Boot Color:</b> <b>01</b> = Black <b>04</b> = Gray <b>07</b> = Green <b>Blank</b> = No Boot <b>02</b> = White <b>05</b> = Yellow <b>08</b> = Violet <b>03</b> = Red <b>06</b> = Blue <b>09</b> = Orange  <b>Cord Color:</b> <b>01</b> = Black <b>04</b> = Gray <b>07</b> = Green <b>02</b> = White <b>05</b> = Yellow <b>08</b> = Violet <b>03</b> = Red <b>06</b> = Blue <b>09</b> = Orange

ⓑ Add "B" for bulk pack of 100 modular cords.

Because we continuously improve our products, Siemon reserves the right to change specifications and availability without prior notice.

**For additional resource information:**  
 Visit our web site at [www.siemon.com](http://www.siemon.com)

### Worldwide Headquarters North America

Watertown, CT USA  
 Phone (1) 860 945 4200 US  
 Phone (1) 888 425 6165

### Regional Headquarters EMEA

Europe/Middle East/Africa  
 Surrey, England  
 Phone (44) 0 1932 571771

### Regional Headquarters Asia/Pacific

Shanghai, P.R. China  
 Phone (86) 21 5385 0303

### Regional Headquarters Latin America

Bogota, Colombia  
 Phone (571) 657 1950/51/52