


QSFP+ to 4 SFP+ 10/40G Direct Attach Copper Cables


Siemon hybrid cables allow users to break out 40GB QSFP+ ports to four individual single lane 10G SFP+ ports. They offer a cost-effective, low-power option for high-speed data center interconnects. The direct attach assemblies support 4 lanes of 10Gb/s (40Gb/s composite) and are available in standard lengths up to 5 meters with longer custom lengths available.

Applications

- Infiniband SDR, DDR, QDR
- Ethernet 10G, 40G
- Rack-to-Rack
- Top-of-Rack
- Switch-to-Switch
- Switch-to-Server
- Networking
- Storage
- Hubs
- Routers
- Servers
- NIC

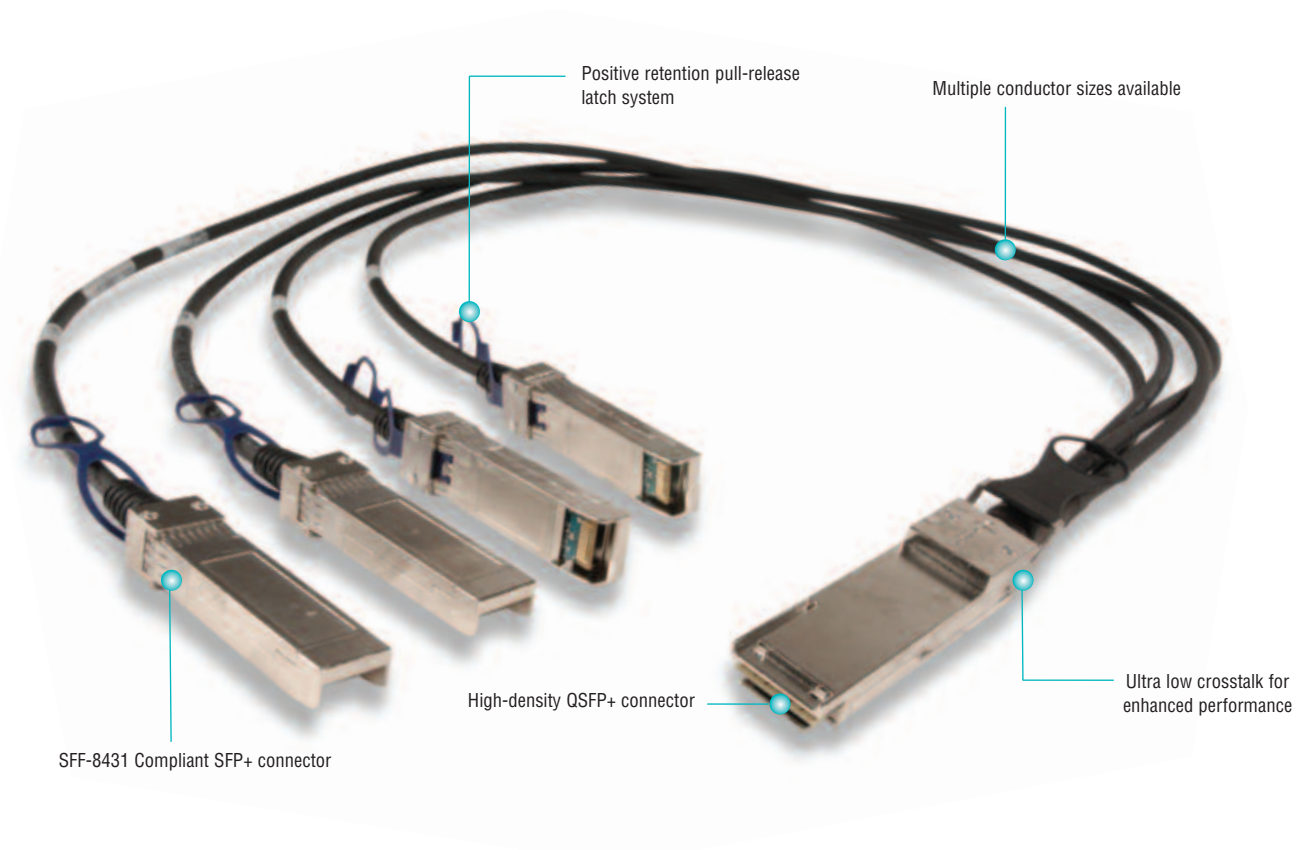

PCB Termination

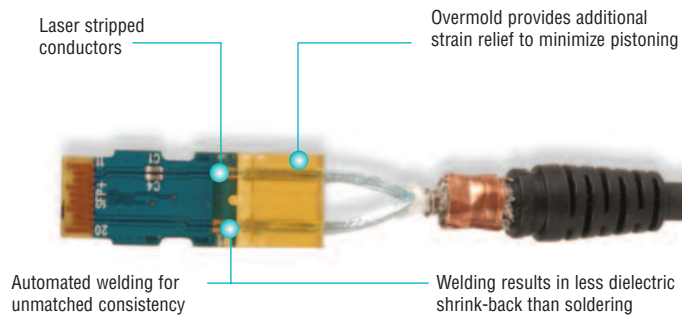

QSFP+ to 4 SFP+ 10/40G Direct Attach Copper Cables

Ordering Information:

QSFP+ to 4 SFP+ Passive Copper Cable Assemblies

Part Number (Black PVC)	Part Number (Black CM/LSOH)	Length	Gauge
SFPPQSFP30-00.5	SFPPQSFP3000.5L	0.5m (1.6 ft.)	30
SFPPQSFP30-01	SFPPQSFP3001L	1m (3.3 ft.)	30
SFPPQSFP30-01.5	SFPPQSFP3001.5L	1.5m (4.9 ft.)	30
SFPPQSFP30-02	SFPPQSFP3002L	2m (6.6 ft.)	30
SFPPQSFP28-02.5	SFPPQSFP2802.5L	2.5m (8.2 ft.)	28
SFPPQSFP28-03	SFPPQSFP2803L	3m (9.8 ft.)	28
SFPPQSFP28-05	SFPPQSFP2805L	5m (16.4 ft.)	28

PERFORMANCE SPECIFICATIONS

Electrical	
Min. Dielectric Withstand Voltage	300 VDC
Insulation Resistance	1000 Mohms
Current Rating	0.5 Amp Min/Signal Contact
General	
Operating Temperature	0 to 70° C (32 to 158° F)
Flammability Rating (Plastics)	UL 94
Green Features	RoHS, Lead-Free
Shield	Braid/Foil
Marking	Mfg Name, Part #, Date Code

Plug	
Backshell Material	Nickel Plated Zinc Diecast
Contact Material	PCB with Gold-Plated Pads
Latch	Positive Latching w/Pull Tab
Insertion Force	QSFP+: 40N (8.9 lbf.) Max SFP+: 30N (6.7 lbf.) Max
Withdrawal Force	QSFP+: 30N (6.7 lbf.) Max SFP+: 20N (4.5 lbf.) Max
Retention Force	90N (20.2 lbf.) Min
Durability	QSFP+: 250 Cycles Min SFP+: 50 Cycles Min
Cable	
Conductor	Solid
Wire Gauge	30 AWG and 28 AWG
Impedance	100 +/- 5 ohms
Construction	Twinaxial
Cable OD	30 AWG = 4.2mm (0.165 in.)
	28 AWG = 4.7mm (0.185 in.)
Jacket Type	PVC or CM/LSOH
Bend Radius	5X Cable OD - Single 10X Cable OD - Repeated

Standards Compliance
QSFP+ End
ITBA V2 Revision 1.3, IEEE 802.3ba
SFF-8436, SFF-8636
RoHS
SFP+ End
SFF-8431
SFF-8432
SFF-8472
RoHS

© 2018 Siemon SIS_SS_QSFPto4SFP_RevE_0418

Because we continuously improve our products, Siemon reserves the right to change specifications and availability without prior notice.

Worldwide Headquarters
North America
Watertown, CT USA
Phone (1) 860 945 4200

Regional Headquarters
Europe Russia Africa
Chertsey, Surrey, England
Phone (44) 0 1932 571771

Regional Headquarters
China
Shanghai, P.R. China
Phone (86) 215385 0303

Regional Headquarters
Latin America
Bogota, Colombia
Phone (571) 657 1950/51/52

Regional Headquarters
India Middle East
Dubai, United Arab Emirates
Phone (971) 4 3689743

Regional Headquarters
Asia Pacific
Sydney, Australia
Phone (86) 21 5385 0303

Siemon Interconnect Solutions
Watertown, CT USA
Phone (1) 860 945 4213 US
www.siemon.com/SIS