


Solution 6® OSP UTP Cable (GLOBAL)

Siemon's Category 6 UTP outside plant (OSP) cable delivers TIA and ISO performance requirements for Category 6/Class E. This robust cable is designed to support the latest applications in outside wet environments, including PoE+ and HDBaseT. Suitable for direct burial, lashed aerial, duct and underground conduit installations, the cable's four pairs are segregated by an innovative separator, filled with a non-conductive water-blocking gel to prevent moisture ingress. The cable's rugged outer jacket is UV-resistant.

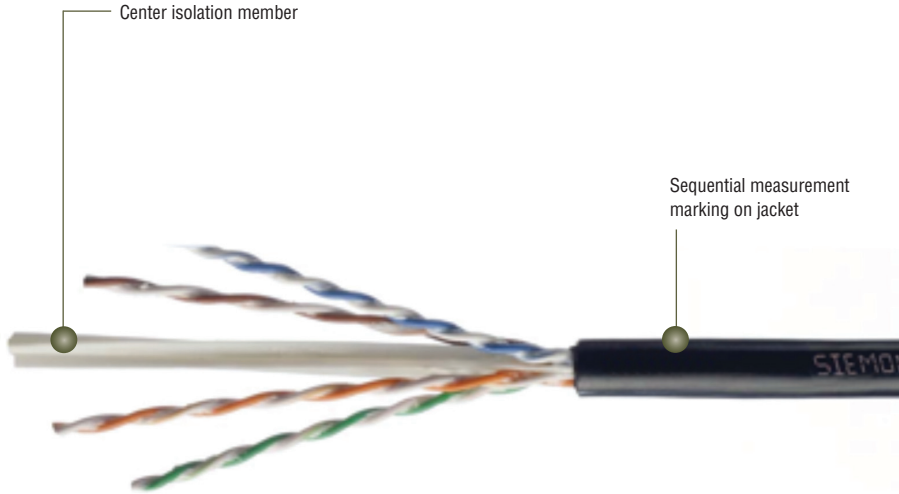


HIGHLIGHTS

- UTP, 4-pair
- Polyolefin Jacket, UV Resistant
- Gel filled (Non Conductive)
- Supports all applications designed to operate over category 6 or lower rated systems.
- RoHS
- Approved for use in direct burial, aerial and underground conduit applications

STANDARDS COMPLIANCE

- ANSI/TIA - 568-C.2
- IEC 61156-5 Ed 2.0
- ISO/IEC 11801 Ed 2.2
- EN 50173-1
- EN-50288-6-1
- IEEE 802.3 af (Type 1 PoE)
- IEEE 802.3 af (Type 2 PoE)
- IEEE 802.3 bt (Type 3 PoE)
- IEEE 802.3 bt (Type 4 PoE)
- Power over HDBaseT (PoH)

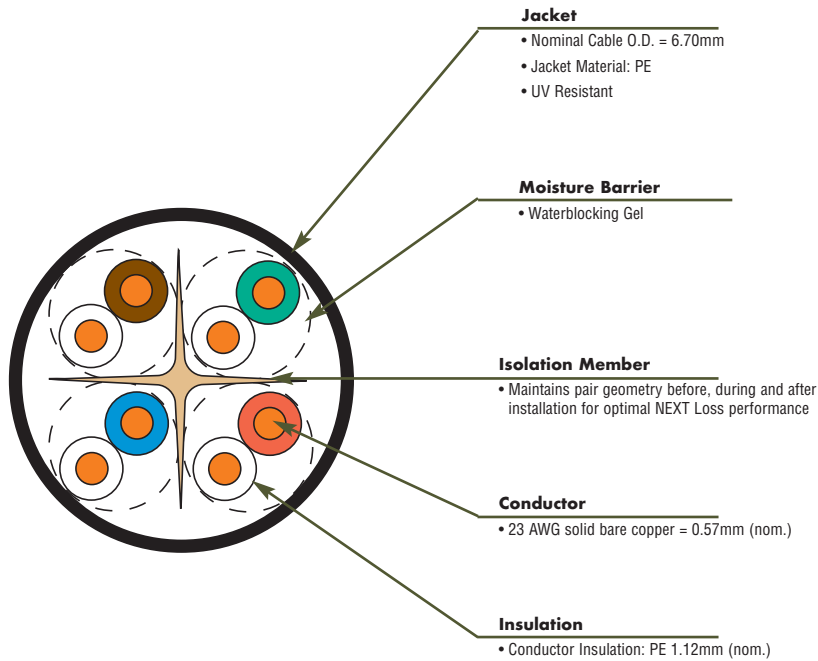

Product Information

ELECTRICAL SPECIFICATIONS

DC Resistance	<9.38 Ω/100m
DC Resistance Unbalance	5%
Mutual Capacitance	5.6 nF/100m
Capacitance Unbalance	< = 330 pF/100m
NVP	66%
TCL	30-10log(f/100)dB
Delay Skew	45 ns/100m

PHYSICAL PROPERTIES

Pulling Tension (max)	110N (24.72 lbf)
Bend Radius (min)	26.8mm (1.055 in.)
Installation Temperature	-15 to 50°C (-59 to 122°F)
Storage Temperature	-55 to 70°C (-131 to 158°F)
Operating Temperature	-20 to 60°C (-4 to 140°F)

TRANSMISSION PERFORMANCE

□ Guaranteed Worst Case:

■ Siemon Typical:

Based on data from a randomly selected cable sample.

Frequency (MHz)	Insertion Loss (dB)		NEXT (dB)		PS NEXT (dB)		ACR-F (dB)		PS ACR-F (dB)		Return Loss (dB)		ACR-N (dB)		PS ACR-N (dB)		Propagation Delay (ns)	
	2.1	1.7	75.3	96.4	72.3	95.4	68.0	79.7	65.0	79.5	20.0	24.3	73.2	94.8	70.2	93.8	570	521
4.0	3.8	3.2	66.3	83.3	63.3	81.0	56.0	67.4	53.0	67.3	23.0	26.9	62.4	80.3	59.4	77.9	552	517
10.0	6.0	5.1	60.3	79.1	57.3	77.9	48.0	59.7	45.0	59.6	25.0	29.4	54.3	74.3	51.3	72.9	545	514
16.0	7.6	6.4	57.2	76.4	54.2	75.4	43.9	55.8	40.9	55.6	25.0	31.1	49.6	70.3	46.6	69.1	543	513
20.0	8.5	7.2	55.8	78.9	52.8	75.6	42.0	53.8	39.0	53.7	25.0	30.8	47.3	71.8	44.3	68.7	542	512
31.25	10.7	8.9	52.9	65.1	49.9	64.9	38.1	49.4	35.1	49.3	23.7	33.6	42.2	56.6	39.2	56.1	540	511
62.5	15.5	12.7	48.4	64.5	45.4	63.7	32.1	43.2	29.1	43.1	21.5	34.5	32.9	52.5	29.9	51.1	539	511
100.0	19.9	16.1	45.3	60.3	42.3	59.3	28.0	38.2	25.0	38.0	20.1	34.2	25.4	44.8	22.4	43.4	538	510
160.0	25.7	20.6	42.2	57.6	39.2	56.9	23.9	35.3	20.9	34.7	18.7	29.4	16.5	38.1	13.5	36.6	537	510
200.0	29.1	23.0	40.8	51.3	37.8	50.2	22.0	36.2	19.0	35.3	18.0	29.0	11.6	29.1	8.6	27.9	537	510
250.0	33.0	25.9	39.3	47.2	36.3	46.9	20.0	42.4	17.0	39.0	17.3	26.8	6.3	22.2	3.3	21.3	536	510
300.0*	-	28.5	-	55.7	-	53.6	-	37.4	-	36.5	-	24.0	-	27.6	-	25.4	-	510
400.0*	-	33.4	-	51.4	-	50.7	-	23.5	-	23.5	-	25.2	-	19.3	-	18.3	-	510
500.0*	-	37.6	-	49.5	-	46.7	-	20.9	-	20.9	-	21.9	-	11.9	-	9.1	-	509
550.0*	-	39.6	-	50.2	-	46.4	-	21.2	-	21.1	-	22.4	-	12.2	-	8.4	-	509

Ordering Information

CATEGORY 6 OUTSIDE PLANT DIRECT BURIAL CABLE:

9C6O4-E2-01-R1A. 4-pair 23 AWG, UTP, PE jacket, Black, 305m Reel

Because we continuously improve our products, Siemon reserves the right to change specifications and availability without prior notice.

Worldwide Headquarters
North America
 Watertown, CT USA
 Phone (1) 860 945 4200

Regional Headquarters
Europe Russia Africa
 Chertsy, Surrey, England
 Phone (44) 0 1932 571771

Regional Headquarters
China
 Shanghai, P.R. China
 Phone (86) 215385 0303

Regional Headquarters
Latin America
 Bogota, Colombia
 Phone (571) 657 1950/51/52

Regional Headquarters
India Middle East
 Dubai, United Arab Emirates
 Phone (971) 4 3689743

Regional Headquarters
Asia Pacific
 Sydney, Australia
 Phone (86) 21 5385 0303

Siemon Interconnect Solutions
Watertown, CT USA
 Phone (1) 860 945 4213 US
 www.siemon.com/SIS

