



SYSTEM 5e® F/UTP CABLE — US

Siemon screened category 5e cable perfectly complements the performance of our screened 5e outlets. Siemon cable exceeds all TIA/EIA and ISO/IEC requirements for category 5e/class D transmission performance. Utilizing Siemon cable is the ideal way to ensure optimum channel performance and is essential for a complete end-to-end warranted system.

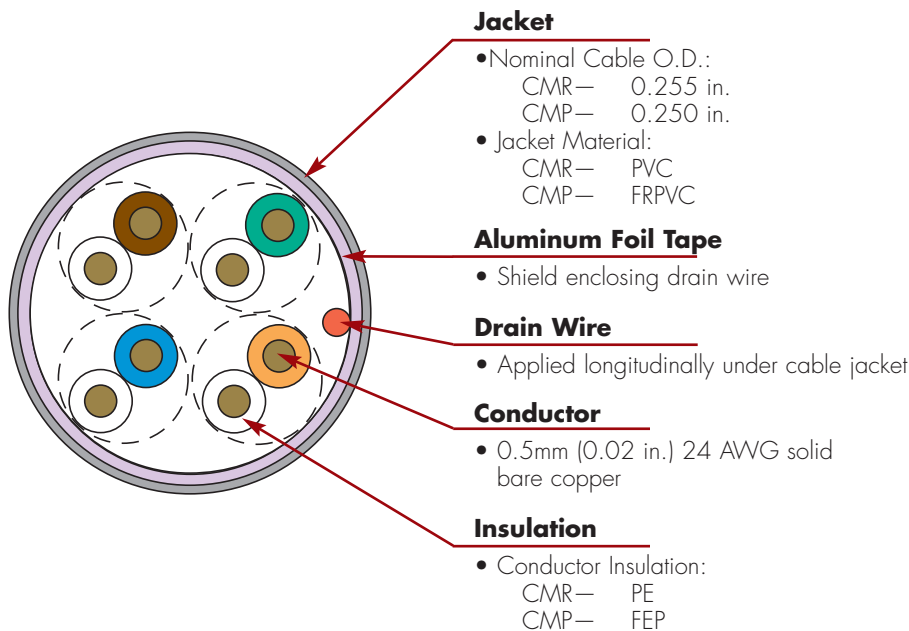

CABLE — US

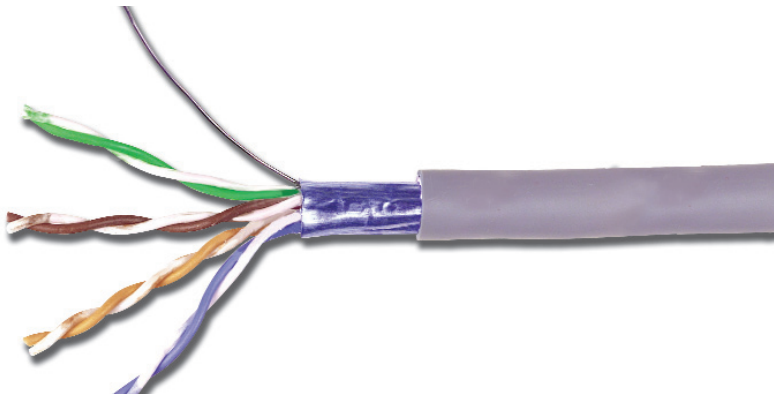

HIGHLIGHTS

- Transmission performance verified by UL
- Reverse sequential numbering
- Round jacket
- Jacket material is lead free

PACKAGING

- 1000 ft. reel
- Weight
CMR— 25 lbs/1000 ft.
CMP— 30 lbs/1000 ft.

STANDARDS COMPLIANCE

- ISO/IEC 11801: 2002 (Category 5e)
- ANSI/TIA/EIA-568-B.2 (Category 5e)

ETHERNET APPLICATIONS SUPPORT

- 1000BASE-T
- 100BASE-T
- 10BASE-T

Supports any application designed for category 5e or lower cabling

System 5e Plenum 4-Pair F/UTP Cable (CMP, CSA Type FT6):

9A5P4-E1-(XX)-R1A.....Plenum, 1000 ft. Reel

System 5e Riser 4-Pair F/UTP Cable (CMR, CSA Type FT4):

9A5R4-E1-(XX)-R1ARiser, 1000 ft. Reel

Use (XX) to specify jacket color: 02 = white, 04 = gray, 05 = yellow, 06 = blue

Cable colors highlighted in red indicate FOCUS products which are readily available. Other colors may have extended lead times and minimum purchase requirements.

CONNECTING THE WORLD TO A HIGHER STANDARD

WWW.SIEMON.COM



PRODUCT INFORMATION

CABLE — US


System 5e® F/UTP Cable

ELECTRICAL SPECIFICATIONS

DC Resistance	<9.38 Ω/328 ft.
DC Resistance Unbalance	5%
Mutual Capacitance	5.6nF/328 ft.
Capacitance Unbalance	<330 pF/328 ft.
Characteristic Impedance (ohms)	1 ≤ f ≤ 100: 100 ± 15% 100 ≤ f ≤ 160: 100 ± 20% 160 ≤ f ≤ 350: 100 ± 22%
NVP	CMP—70% CMR— 68%
Delay Skew (ns)	≤ 35

PHYSICAL PROPERTIES

	CMP	CMR
Pulling Tension	25 lbf(max)	25 lbf(max)
Bend Radius	1 in. (min)	1 in. (min)
Installation Temperature	+32 to 140 °F	+32 to 140 °F
Storage Temperature	-4 to 140 °F	-4 to 140 °F
Operating Temperature	-4 to 122 °F	-4 to 122 °F

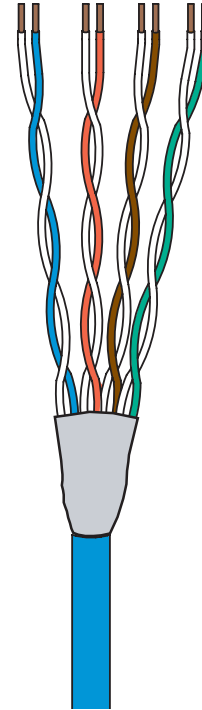

TRANSMISSION PERFORMANCE — GUARANTEED WORST CASE

Frequency (MHz)	Insertion Loss (dB)	NEXT Loss (dB)	PS NEXT Loss (dB)	ACR (dB)	PSACR (dB)	ELFEXT (dB)	PS ELFEXT (dB)	Return Loss (dB)	Propagation Delay (ns)
1.0	2.0	65.3	62.3	63.3	60.3	63.8	60.8	20.0	569.0
4.0	4.1	56.3	53.3	52.2	49.2	51.8	48.8	23.0	552.0
10.0	6.5	50.3	47.3	43.8	40.8	43.8	40.8	25.0	545.0
16.0	8.2	47.2	44.3	38.9	36.0	39.7	36.7	25.0	543.0
20.0	9.3	48.8	42.8	36.5	33.5	41.7	34.7	25.0	542.0
31.25	11.7	42.9	39.9	31.2	28.2	37.9	30.9	23.6	540.0
62.5	17.0	38.4	35.4	21.4	18.4	31.8	24.9	21.5	538.0
100.0	22.0	35.3	32.3	13.3	10.3	27.8	20.8	20.1	538.0
160.0*	28.6	30.3	29.2	3.7	0.7	23.7	16.7	18.7	537.0
200.0*	32.4	30.8	27.8	-1.6	-4.6	22.9	14.8	18.0	536.0
250.0*	36.9	29.3	26.3	-7.5	-10.5	21.7	12.8	17.3	536.0
300.0*	41.0	28.1	25.1	-12.8	-15.8	19.8	11.3	16.8	536.0
350.0*	44.9	27.1	24.1	-17.7	-20.7	16.9	9.9	16.3	535.0

All performance based on 100 meters (328 ft.)

*Performance for frequencies beyond TIA and ISO requirements are for information only.

Because we continuously improve our products, Siemon reserves the right to change specifications and availability without prior notice.

System 5e® is a trademark of Siemon

The Americas
Watertown, CT USA
Phone (1) 860 945 4200

Europe/Middle East/Africa
Surrey, England
Phone (44) 0 1932 571771

Asia/Pacific
Shanghai, P.R. China
Phone (86) 21 6390 6778

Japan
Tokyo, Japan
Phone (03) 5405 7650

PROD-SS-SYS5eFUTPCBLUS Rev. B 8/07 (US)

© 2007 Siemon

WWW.SIEMON.COM

ISO 9001 CERTIFIED **ISO 14001** CERTIFIED

