


System 6[®] UTP Cable - Plenum - US

System 6 cable provides significant headroom above all TIA and ISO/IEC category 6 transmission performance specifications. Combine our high performance category 6 connectivity with System 6 cable and the result is a system with superior electrical performance for optimum applications support.

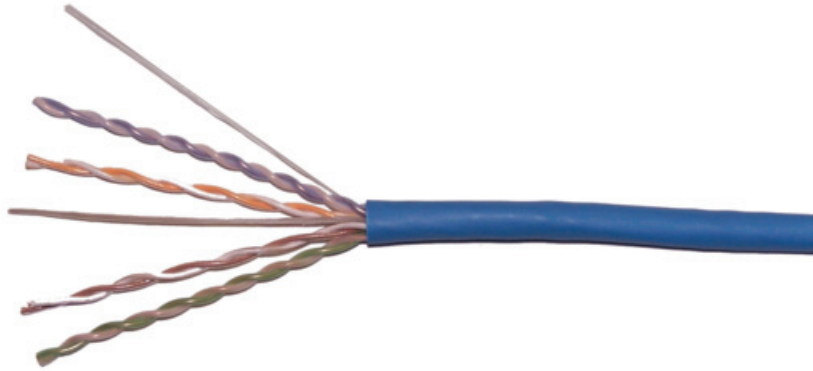

CABLE FEATURES:

- Nominal jacket OD: - CMP = .208 in.
- 23 AWG 0.57mm (0.024 in.) solid bare copper
- Reverse sequential numbering
- Round jacket
- Minimal center isolation member reduces overall diameter
- Jacket material is lead free
- 75° C temperature rating

STANDARDS COMPLIANCE:

- ISO/IEC 11801-1 Ed.1.0
- IEC 61156-5
- ANSI/TIA-568.2-D
- UL Verified:
 - CMP and CSA FT6
- RoHS

APPLICATIONS SUPPORT

- 1000BASE-T
- 100BASE-T
- 10BASE-T
- IEEE 802.3af (Type 1 PoE)
- IEEE 802.3at (Type 2 PoE)
- IEEE 802.3bt (Type 3 PoE)
- IEEE 802.3bt (Type 4 PoE)
- Power over HDBaseT (PoH)

