

# Category 7<sub>A</sub> 1200 MHz Cable - International

Siemon's fully shielded Category 7<sub>A</sub> 1200 MHz end-to-end cabling solution is the highest-performing, most secure twisted-pair copper cabling system available. Siemon's Category 7<sub>A</sub> 1200 MHz cable perfectly complements the performance of the TERA outlet. Category 7<sub>A</sub> 1200 MHz cable exceeds all ISO/IEC requirements for Category 7A/Class FA transmission performance and Broadcast Communications Technologies (BCT). A fully shielded cable with individual foils around each pair coupled with a high screen coverage outer braid provides perfect immunity from outside interferences. In addition, the cable jacket has been qualified for mechanical reliability in high temperature environments up to 75°C. In PoE remote power applications, this cable can be installed in environments up to 60°C and will not experience degradation due to heat rise inside the cable bundle. Further, this 7A cable is capable of running multiple lower speed applications, known as cable sharing, from one drop. Siemon cable is the ideal way to ensure optimum channel performance and is essential for a complete end-to-end warranted solution.

CABLE — INTERNATIONAL




## COMPLIANCE

- ISO/IEC 11801: Ed. 2.2 (Class F<sub>A</sub>)
- ISO/IEC 15018 BCT Channel Application
- IEC 61156-7 Ed 1.1
- IEC 61156-5 Ed 2.1 (Category 7<sub>A</sub>)
- EN 50288 • EN 55022
- EN 50173 • EN 55024
- LSOH: IEC 60332-1, IEC 60754, and IEC 61034
- EN50399 Class D<sub>ca</sub>S<sub>1</sub>d<sub>1</sub>a<sub>1</sub>

## CABLE CONSTRUCTION

- S/FTP
- Nominal jacket OD: 8mm (0.31 in.)
- 0.64mm (0.025 in.) solid (non-tinned) copper
- Sequential measurement markings on jacket
- Pairs individually shielded with aluminium-polyester foil
- Overall tinned-copper braid

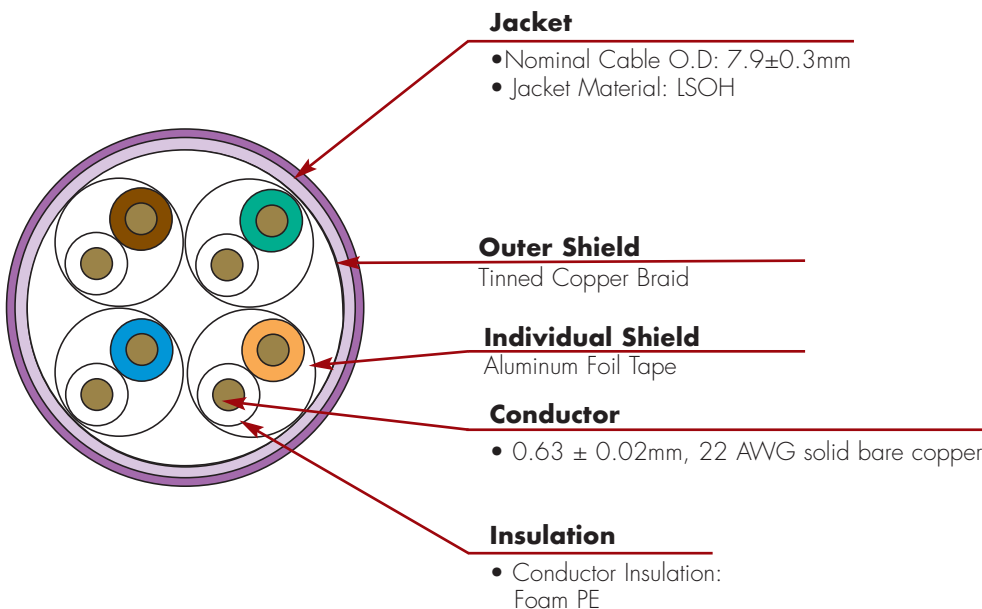

**ELECTRICAL SPECIFICATIONS**

DC Resistance	<17.0 Ω/100m
DC Resistance Unbalance	2%
Mutual Capacitance	5.6 nF/100m
Capacitance Unbalance	<330 pF/100m
Characteristic Impedance (ohms)	1-100 MHz: 100 ± 15% 100-250 MHz: 100 ± 22% 250-1000 MHz: 100 ± 25%
NVP	80%
TCL	40-10 x log(f)dB
Delay Skew	≤25ns

**PHYSICAL PROPERTIES**

LSOH	
Pulling Tension (max)	110N (25 lbf)
Bend Radius (min)	50mm (2.0 in.)
Installation Temperature	0 to 75°C (+32 to 167°F)
Storage Temperature	-20 to 75°C (-4 to 167°F)
Operating Temperature	-20 to 75°C (-4 to 167°F)

**TRANSMISSION PERFORMANCE**

GUARANTEED WORST CASE

SIEMON TYPICAL

Frequency (MHz)	Insertion Loss (dB)		NEXT (dB)		PS NEXT (dB)		ACR (dB)		PSACR (dB)		ACR-F (dB)		PS ACR-F (dB)		Return Loss (dB)		Propagation Delay (ns)	
	Guaranteed	Typical	Guaranteed	Typical	Guaranteed	Typical	Guaranteed	Typical	Guaranteed	Typical	Guaranteed	Typical	Guaranteed	Typical	Guaranteed	Typical	Guaranteed	Typical
1.0*	1.9	1.7	78.0	105.2	75.0	99.5	76.1	103.5	73.1	97.7	78.0	99.6	75.0	96.6	20.0	30.0	536.0	455
4.0	3.5	3.2	78.0	107.8	75.0	102.8	74.5	104.6	71.5	99.7	78.0	107.5	75.0	102.6	23.0	27.8	518.0	452
10.0	5.4	4.8	78.0	105.2	75.0	99.4	72.6	100.4	69.6	94.6	74.0	103.1	71.0	97.4	25.0	34.1	511.4	449
16.0	6.8	6.1	78.0	109.1	75.0	101.7	71.2	103.0	68.2	95.6	69.9	104.2	66.9	99.9	25.0	33.1	509.0	447
20.0	7.6	6.9	78.0	107.2	75.0	101.3	70.4	100.3	67.4	94.4	68.0	105.0	65.0	97.4	25.0	34.4	508.0	446
31.25	9.6	8.8	78.0	106.8	75.0	100.0	68.4	98.0	65.4	91.2	64.1	102.3	61.1	96.7	23.6	35.9	506.4	445
62.5	13.7	12.7	78.0	108.3	75.0	102.7	64.3	95.7	61.3	90.0	58.1	104.6	55.1	98.4	21.5	41.1	504.6	444
100.0	17.5	16.2	76.0	105.5	73.0	97.8	58.5	89.3	55.5	81.6	54.0	104.1	51.0	97.7	20.1	36.0	503.6	444
200.0	25.3	23.1	71.5	107.7	68.5	101.9	46.2	84.6	43.2	78.8	48.0	101.6	45.0	95.6	18.0	30.4	502.5	444
250.0	28.5	25.8	70.0	110.4	67.0	101.4	41.5	84.6	38.5	75.5	46.0	107.0	43.0	99.1	17.3	33.5	502.3	443
300.0	31.5	28.3	68.8	105.5	65.8	100.0	37.3	77.2	34.3	71.6	44.5	100.8	41.5	95.3	17.3	34.9	502.1	443
350.0	34.3	30.8	67.8	108.4	64.8	101.0	33.6	77.2	30.6	70.3	43.1	107.5	40.1	97.8	17.3	39.0	501.9	443
400.0	36.9	33.0	67.0	111.2	64.0	103.3	30.1	78.2	27.1	70.2	42.0	107.2	39.0	99.5	17.3	35.5	501.8	443
550.0	44.1	39.0	64.9	105.0	61.9	99.1	20.8	66.0	17.8	60.0	39.2	102.0	36.2	94.9	17.3	33.8	501.5	443
600.0	46.3	40.8	64.3	108.3	61.3	99.3	18.0	67.5	15.0	58.5	38.4	105.2	35.4	96.6	17.3	35.9	501.5	443
800.0	54.5	47.5	62.5	98.7	59.5	93.8	7.9	51.2	4.9	46.2	35.9	93.1	32.9	90.1	16.1	34.0	501.3	443
1000.0	62.0	53.7	61.0	100.2	58.0	93.9	-1.0	46.5	-4.0	40.2	34.0	83.3	31.0	77.1	15.1	25.3	501.1	443
1100.0	65.6	56.6	60.4	106.2	57.4	98.0	-5.2	49.6	-8.2	41.4	33.2	80.9	30.2	74.6	14.7	30.0	501.1	443
1200.0	65.6	61.8	59.8	100.1	56.8	92.6	-9.2	38.3	-12.2	30.8	32.4	78.1	29.4	67.4	14.3	24.8	501.1	441
1300.0*	-	62.2	-	95.2	-	87.6	-	33.0	-	25.4	-	66.1	-	59.6	-	19.7	-	445
1500.0*	-	68.4	-	101.3	-	90.4	-	32.9	-	22.0	-	37.5	-	57.5	-	19.0	=	441

\*Values below 4 MHz and above 1200 MHz are for information only.

All performance based on 100 metres (328 ft.)

Part #	Description
9T7L4-E12.....	LSOH (IEC 60332.1), violet jacket, Class E <sub>ca</sub> , D <sub>ca</sub> 305m (1000 ft.)
9T7L4-E12-5CR.....	LSOH (IEC 60332.1), violet jacket, Class E <sub>ca</sub> , D <sub>ca</sub> 500m (1640 ft.)
9T7L4-E12-1KR.....	LSOH (IEC 60332.1), violet jacket, Class E <sub>ca</sub> , D <sub>ca</sub> 1000m (3281 ft.)

**Note:** For use with 900µm tight buffer terminations only. Fan-out kits to transition from 250µm to 900µm cannot be used with LightBow connectivity.

Because we continuously improve our products, Siemon reserves the right to change specifications and availability without prior notice.

**Worldwide Headquarters**  
North America  
Watertown, CT USA  
Phone (1) 860 945 4200

**Regional Headquarters**  
Europe Russia Africa  
Chertsy, Surrey, England  
Phone (44) 0 1932 571771

**Regional Headquarters**  
China  
Shanghai, P.R. China  
Phone (86) 215385 0303

**Regional Headquarters**  
Latin America  
Bogota, Colombia  
Phone (571) 657 1950/51/52

**Regional Headquarters**  
India Middle East  
Dubai, United Arab Emirates  
Phone (971) 4 3689743

**Regional Headquarters**  
Asia Pacific  
Sydney, Australia  
Phone (86) 21 5385 0303

**Siemon Interconnect Solutions**  
Watertown, CT USA  
Phone (1) 860 945 4213 US  
www.siemon.com/SIS

