


XGLO® External Mini Outside Plant Loose Tube (Sacrificial PE Sheath) -Australia

Siemon mini-outside plant (OSP) fiber optic loose tube cables are ideal for campus, building-to-building interconnections, underground conduit and direct burial with proper sandbank filling installations. This loose tube dielectric optical cable is designed for external underground installations in (micro) ducts by pulling, blowing or floating techniques. Polyamide provides anti-termite protection.

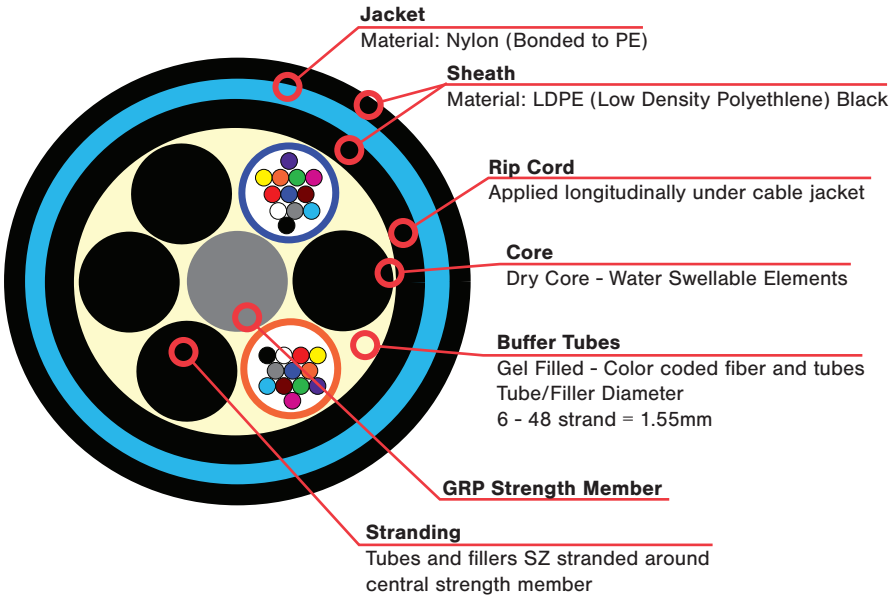


FEATURES AND BENEFITS

- Multi-loose tube construction – Single layer 6 to 48 fibers
- Central strength member (CSM): Glass fiber reinforced plastic material (GRP) with or without over-sheathing
- Tube: Thermoplastic material, containing 6 optical fibers filled with a low viscosity, thixotropic, non-melting gel fully compatible with fiber coating and tube material
- Stranding: The required numbers of elements (tubes and fillers) are SZ stranded around the central strength member
- Longitudinal water tightness: Water swellable elements (dry-core)
- Sheath: UV stabilized polyethylene in compliance with AS 1049. Two rip cords provided beneath the sheath for easy removal
- Hard jacket: UV stabilized polyamide (Nylon) in compliance with AS 1049 integrally bonded to PE sheath
- Sacrificial sheath: UV stabilized polyethylene in compliance with AS 1049

Ordering Information

XGLO Singlemode OS1/OS2

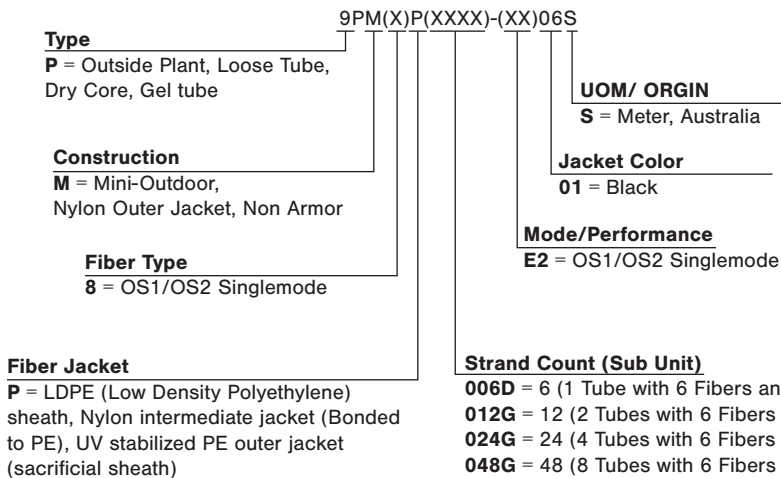

COMPLIANCE

- IEC 60794-1
- IEC 60794-5
- ACMA-AS/CA S008
- Water penetration IEC 60794-1-F5C

Product Information

Standards Compliance

XGLO Singlemode, OS1/OS2

ISO/IEC 11801-1:2017

IEC 60794-3-10

ANSI/TIA-568.3-D

ANSI/TIA-598-D

ANSI/TIA-492 CAAB

ITU-T G.652 C/D

Application Support

XGLO Singlemode, OS1/OS2

Application	Distance (m)
10GBASE - L (1310 nm)	8,000
10GBASE- E (1550 nm)	30,000
10G Fiber Channel (Serial-1310 nm)	10,000
10G Fiber Channel (WDM-1310 nm)	10,000
1000BASE-LX (1300 nm)	5,000
Fiber Channel 266/1062 (1300 nm)	10,000
ATM 52/155/622 (1300 nm)	15,000

Minimum Performance Parameters for XGLO Singlemode Fiber

Fiber Type	Wavelength (nm)	Maximum Attenuation (dB/km)
Singlemode (OS1/OS2)	1310	0.40
	1550	0.30

Physical Specifications (All Values Are Nominal)

Fiber Count	Nominal Cable Diameter mm	Maximum Pulling Tension kN	Nominal Net Weight kg/km
6	7.3	1.0	43
12	7.3	1.0	43
24	7.3	1.0	43
48	7.3	1.0	43

Fiber Count	Maximum Crush Resistance kN/100mm	Operation Temperature °C (°F)	Installation Temperature °C (°F)	Storage Temperature °C (°F)	Minimum Bend Radius	
					Installation	Long Term
6,12,24,48	2.0	-10 to 70 (-14 to 158)	0 to 50 (32 to 158)	-20 to 70 (-4 to 158)	20 x Cable OD	10 x Cable OD

Custom lengths are available upon request. Contact our Customer Service Department for more information.

Because we continuously improve our products, Siemon reserves the right to change specifications and availability without prior notice.

North America
P: (1) 860 945 4200

Asia Pacific
P: (61) 2 8977 7500

Latin America
P: (571) 657 1950/51/52

Europe
P: (44) 0 1932 571771

China
P: (86) 215385 0303

India Middle East
P: (971) 4 3689743

Siemon Interconnect Solutions
P: (1) 860 945 4213
www.siemon.com/SIS

WWW.SIEMON.COM

