


# Z-MAX<sup>®</sup> 6A Shielded Modular Cords - International

Combining the unparalleled performance of an exclusive PCB-based plug, noise-resistant shielded construction and a host of innovative user friendly features, the shielded Z-MAX 6A modular cords are the ultimate Category 6A cord. All cords are 100% factory-tested to ensure performance and compliance.

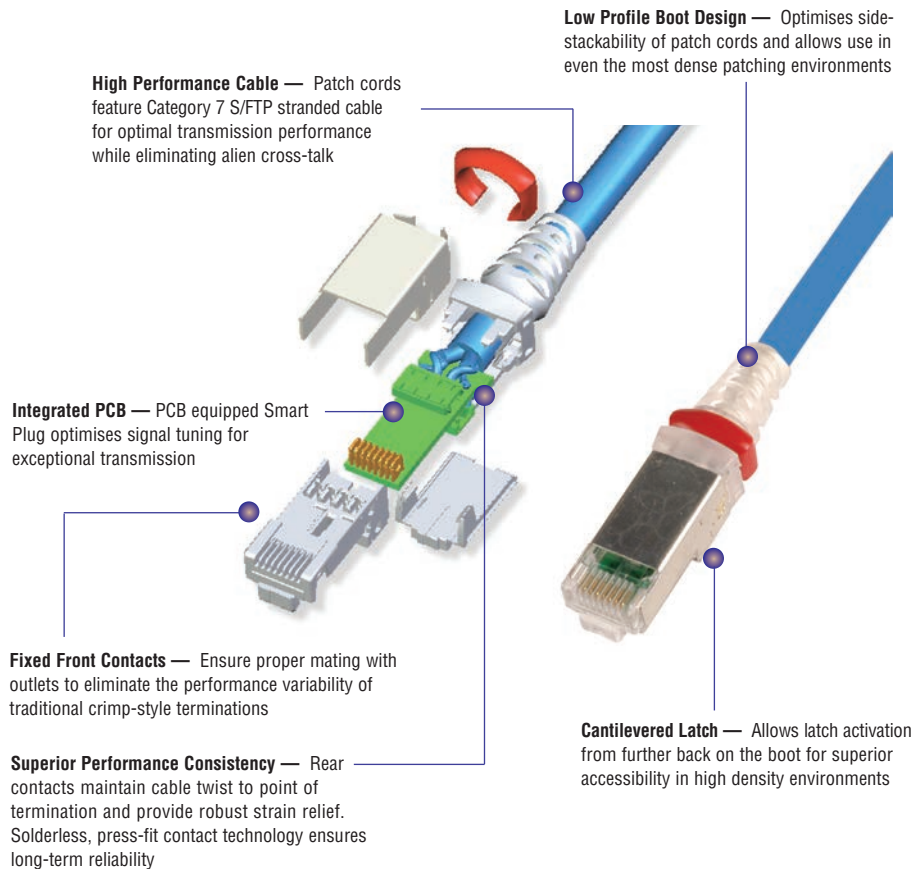

## STANDARDS COMPLIANCE:

- ISO/IEC 11801-1 Ed 1.0
- ANSI/TIA-568.2-D, 1096-A
- IEC 60603-7, 60603-7-51
- LSOH: IEC 60332-1, IEC 60754, and IEC 61034
- For solid conductor cable assemblies, see reference cable part number specification sheet / DoP for CPR compliance details
- CM - UL Listed 1863
- Anatel Resolution No.242,2000 (may not apply to all assemblies listed)

## APPLICATIONS SUPPORT

- 10GBASE-T
- 1000BASE-T
- 100BASE-T
- 10BASE-T
- IEEE 802.3af (Type 1 PoE)
- IEEE 802.3at (Type 2 PoE)
- IEEE 802.3bt (Type 3 PoE)
- IEEE 802.3bt (Type 4 PoE)
- Power over HDBaseT (PoH)



Boot ensures proper bend relief, critical for Category 6A performance.



Removable clips allow field colour coding even when cords are connected.



Solid F/UTP assemblies are available for consolidation point and equipment cord applications.

**PERFORMANCE SPECIFICATIONS\***

ELECTRICAL	
Contact Resistance	20 mΩ
Input to Output Resistance	200 mΩ
Min. Dielectric Withstand Voltage (contact to contact)	1000 V DC or AC peak
Insulation Resistance	500 mΩ
Compatibility	Backwards to Cat 5e and Cat 6
Current Rating @ 25° C	1.5 A
Power over Ethernet	Suitable for PoE and PoE+
Power over Ethernet	< 10 mΩ/m @ 10 MHz
MECHANICAL — GENERAL	
Operating Temperature	-10 to 60° C, (14 to 140° F)
Flammability Rating	UL 94 V-0
Green Features	RoHS, lead-free, halogen-free, PVC free
Plug Housing Materials	Polycarbonate
Contact Materials	50 microinches gold plating or equivalent
Plastic Materials	Flame retardant themoplastic
Screen	360 degree enclosure
Marking	P/N, length, performance level, QC

MECHANICAL — PLUG	
Number of Plug Insertion Cycles	2500
Min. Plug Retention Force	50N (11.2 lbf)
Plug Compatibility	Compatible with RJ45
Cable to Plug Tensile Strength (min.)	20 lbs.
MECHANICAL — CABLE (STRANDED)	
Wire Size Range (Nominal)	26 AWG 7x32 Stranded tinned copper
Cable Construction	S/FTP
Cable O.D. (nominal)	6.35mm (0.25 in.)
Wiring	T568A/B
Jacket Type	CM/LSOH
Bend Radius	50mm (2.0 in.)
MECHANICAL — CABLE (SOLID)	
Wire Size Range (Nominal)	23 AWG Solid bare copper
Cable Construction	F/UTP
Cable O.D. (nominal)	7.37mm (0.29 in.)
Wiring	T568A/B
Jacket Type	CM/LSOH
Bend Radius	50mm (2.0 in.)

**Ordering Information:**

ZM6A-S(XX)M-(XX) . . . . . Z-MAX 6A shielded (S/FTP), double-ended, stranded modular cord, clear boot, T568A/B, CM/LSOH

<b>Length</b>	<b>Jacket Colour</b>
01 = 1m (3.3 ft.)	01 = Black    04 = Grey    07 = Green
1.5 = 1.5m (5 ft.)	02 = White    05 = Yellow    08 = Violet
02 = 2m (6.6 ft.)	03 = Red        06 = Blue      09 = Orange
03 = 3m (9.8 ft.)	
04 = 4m (13.1 ft.)	
05 = 5m (16.5 ft.)	
7.5 = 7.5m (24.6 ft.)	

ZC6A-S(XX)M(X)-(X)(X) . . . . . Z-MAX 6A shielded (F/UTP) solid modular cord, violet jacket, clear boot

<b>Length</b>	<b>Plugs</b>
03 = 3m (10 ft.)	(Blank) = Single-Ended
05 = 5m (16.4 ft.)	D = Double-Ended (T568A/B)
10 = 10m (33 ft.)	L = LSOH ( (reference cable: 9A6L4-A5, CPR Dca)
15 = 15m (49 ft.)	M = CM ( (reference cable: 9A6M4-A5, CPR Eca)
20 = 20m (65.6 ft.)	
	<b>Wiring</b>
	A = T568B
	T = T568A


Ⓢ Add "B" to end of part number for bulk project pack of 100 cords.

CLIP-(XX) . . . . . Colour coding clip, bag of 25

<b>Clip Colour</b>
01 = Black    04 = Grey    07 = Green
02 = White    05 = Yellow    08 = Violet
03 = Red        06 = Blue      09 = Orange

ZC7-S(XX)M(X)-L(X) . . . . . Z-MAX 6A shielded (S/FTP) solid modular cord, violet jacket, clear boot, LSOH

<b>Length</b>	<b>Plugs</b>
03 = 3m (10 ft.)	(Blank) = Single-Ended
05 = 5m (16.4 ft.)	D = Double-Ended (T568A/B)
10 = 10m (33 ft.)	L = LSOH (reference cable: 9T7L4-E6 CPR B2ca)
15 = 15m (49 ft.)	
20 = 20m (65.6 ft.)	
	<b>Wiring</b>
	A = T568B
	T = T568A



Because we continuously improve our products, Siemon reserves the right to change specifications and availability without prior notice.

**Worldwide Headquarters**  
**North America**  
 Watertown, CT USA  
 Phone (1) 860 945 4200

**Regional Headquarters**  
**Europe Russia Africa**  
 Chertsy, Surrey, England  
 Phone (44) 0 1932 571771

**Regional Headquarters**  
**China**  
 Shanghai, P.R. China  
 Phone (86) 215385 0303

**Regional Headquarters**  
**Latin America**  
 Bogota, Colombia  
 Phone (571) 657 1950/51/52

**Regional Headquarters**  
**India Middle East**  
 Dubai, United Arab Emirates  
 Phone (971) 4 3689743

**Regional Headquarters**  
**Asia Pacific**  
 Sydney, Australia  
 Phone (86) 21 5385 0303

**Siemon Interconnect Solutions**  
**Watertown, CT USA**  
 Phone (1) 860 945 4213 US  
 www.siemon.com/SIS

