


Z-MAX[®] 6A UTP Modular Cords

Combining the unparalleled performance of an exclusive PCB-based smart plug, alien crosstalk resistant construction and a host of innovative end-user features, Z-MAX 6A UTP modular cord sets the bar for Category 6A UTP patching.

High Performance Cable — Z-MAX 6A UTP cords feature dual jacket construction for excellent alien crosstalk performance

Solid Cord Option — Solid UTP cords are available for consolidation point and equipment cord applications

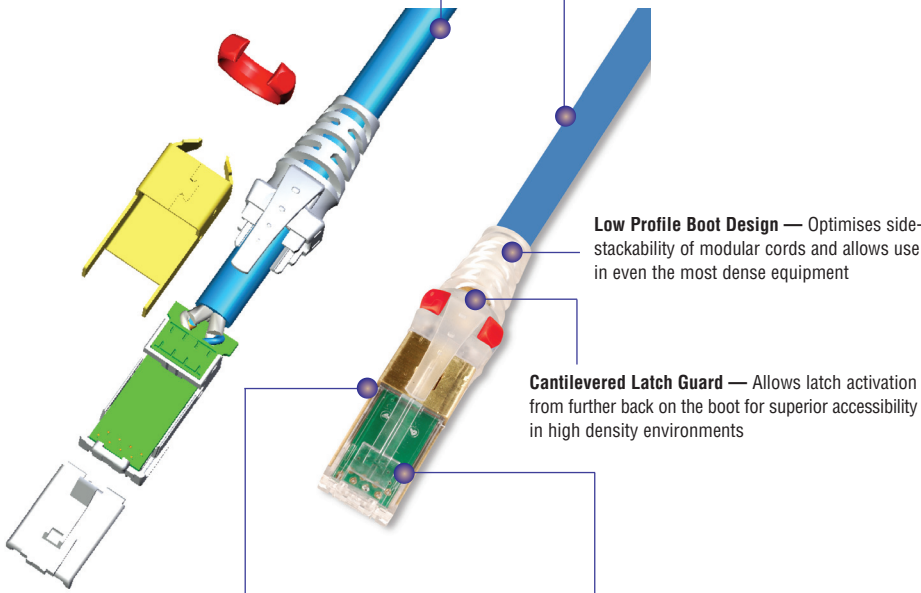

Low Profile Boot Design — Optimises side-stackability of modular cords and allows use in even the most dense equipment


Cantilevered Latch Guard — Allows latch activation from further back on the boot for superior accessibility in high density environments

Superior Performance Consistency — Precision PCB-based conductor terminations eliminate the performance variability of traditional crimp-style terminations. Rear contacts maintain cable twist to point of termination and provide robust strain relief


Integrated PCB — PCB equipped Smart Plugs optimise signal tuning for exceptional transmission. Solderless, press-fit contact design ensures long-term reliability

STANDARDS COMPLIANCE

- ANSI/TIA-568-C.2
- ISO/IEC 11801 Ed 2.2
- IEEE 802.3an (10Gbase-T)
- IEEE 802.3af (PoE)
- IEEE 802.3at (PoE+)
- IEC 60603-7
- IEC 60603-7-4
- UL Listed 1863
- IEC 60332-1 (LSOH)
- IEC 60754 (LSOH)
- IEC 61034 (LSOH)
- ANSI/TIA-1096-A



Coloured Clips
Removable clips allow field colour coding even when cords are connected.



Excellent Bend Relief
Boot ensures proper bend relief, critical for Category 6A performance.



Solid Cord Option
Solid UTP assemblies are available for consolidation point and equipment cord applications.

PRODUCT INFORMATION

Performance Specification Chart:

ELECTRICAL	
Contact Resistance	10 mΩ
Input to Output Resistance	200 mΩ
Min. Dielectric Withstand Voltage (contact to contact)	1000 V DC or AC peak
Insulation Resistance	500 mΩ
Compatibility	Backwards to cat 5e and cat 6
Current Rating	1.5 A
PoE	Suitable for PoE and PoE+
Surface Transfer Impedance	< 10 mΩ/m @ 10 MHz
MECHANICAL – GENERAL	
Operating Temperature	-10 to 60 °C [14 to 140 °F]
Flammability Rating	UL 94 V-0
Green Features	RoHS, lead-free, halogen-free, PVC free
Plug Housing Material	Polycarbonate
Contact Materials	50 microinches gold plating or equivalent
Plastic Materials	Flame retardant thermoplastic
Screen	360 degree enclosure
Marking	P/N, length, performance level, QC
MECHANICAL – PLUG	
Number of Plug Insertion Cycles	2500
Min. Plug Retention Force	50N
Plug Compatibility	Compatible with RJ45 outlets
Cable to Plug Tensile Strength (min)	20 lbs

MECHANICAL – CABLE (STRANDED)	
Wire Size Range (nominal)	26 AWG 7x32 Stranded tinned copper
Cable Construction	UTP dual jacketed
Cable OD (nominal)	7.37mm (0.29 in.) outer, 6.43mm (0.25 in.) inner
Wiring	T568A/B
Jacket Type	CMG
Bend Radius	25mm (1.0 in.)

MECHANICAL – CABLE (SOLID)	
Wire Size Range (nominal)	23 AWG solid bare copper
Cable Construction	UTP
Cable OD (nominal)	7.87mm (0.31 in.) ,
Wiring	T568A/ T568B
Jacket Type	LSOH
Bend Radius	25mm (1.0 in.)

Ordering Information:


ZM6A-(XX)M-(XX)..... Z-MAX 6A UTP, double-ended, stranded modular cord, clear boot, T568A/B, CMG

Length	Jacket Colour
01 = 1m (3.3 ft.)	01 = Black 05 = Yellow
1.5 = 1.5m (5 ft.)	02 = White 06 = Blue
02 = 2m (6.6 ft.)	03 = Red 07 = Green
03 = 3m (9.8 ft.)	04 = Grey 09 = Orange
04 = 4m (13.1 ft.)	
05 = 5m (16.5 ft.)	
7.5 = 7.5m (24.6 ft.)	

ZC6A-(XX)M(X)-L(X)..... Z-MAX 6A UTP, solid modular cord, violet jacket, clear boot, LSOH

Length	Plugs
03 = 3m (10 ft.)	(Blank) = Single-Ended
05 = 5m (16.4 ft.)	D = Double-Ended (T568A/B)
10 = 10m (33 ft.)	
15 = 15m (49 ft.)	
20 = 20m (65.6 ft.)	
Wiring	
A = T568B	
T = T568A	

Cable assembly constructed with EU CPR rated cable - Eca



Ⓢ Add "B" to end of part number for bulk project pack of 100 cords.

CLIP-(XX)..... Colour coding clip, bag of 25

Clip Colour		
01 = Black	04 = Grey	07 = Green
02 = White	05 = Yellow	08 = Violet
03 = Red	06 = Blue	09 = Orange



Product is compliant with UL2043 and is appropriate for use in air handling spaces

Because we continuously improve our products, Siemon reserves the right to change specifications and availability without prior notice.

Worldwide Headquarters
North America
 Watertown, CT USA
 Phone (1) 860 945 4200

Regional Headquarters
Europe Russia Africa
 Chertsy, Surrey, England
 Phone (44) 0 1932 571771

Regional Headquarters
China
 Shanghai, P.R. China
 Phone (86) 215385 0303

Regional Headquarters
Latin America
 Bogota, Colombia
 Phone (571) 657 1950/51/52

Regional Headquarters
India Middle East
 Dubai, United Arab Emirates
 Phone (971) 4 3689743

Regional Headquarters
Asia Pacific
 Sydney, Australia
 Phone (86) 21 5385 0303

Siemon Interconnect Solutions
Watertown, CT USA
 Phone (1) 860 945 4213 US
 www.siemon.com/SIS