


QSFP+ 40G Active Optical Cables

Siemon 40Gb/s Low Power Active Optical Cable (AOC) assemblies offer a cost-effective, extended reach option for high-speed data center interconnects. These AOC assemblies incorporate integrated opto-electronics with four fiber optic transceivers per end, each operating at data rates from 1 to 10.5 Gb/s and supporting a reach up to 100 meters. The cable is available in a number of standard lengths up to 100 meters.

AOC's offer customers the flexibility of traditional optical modules by interfacing to systems via a standard QSFP+ MSA, SFF-8436 connector. The cable is electrically compliant with the SFP+ interface supporting InfiniBand, Ethernet, Fiber Channel and other applications. The QSFP+ connector includes the Digital Diagnostic Monitoring Interface (DDMI).

Applications

- Infiniband SDR, DDR ,QDR
- Ethernet 40G BASE-SR4
- Fiber Channel 4G, 8G, 10G
- Top-of-Rack
- Switch-to-Switch
- Switch-to-Server
- Networking
- Storage
- Hubs
- Routers
- Servers
- NIC

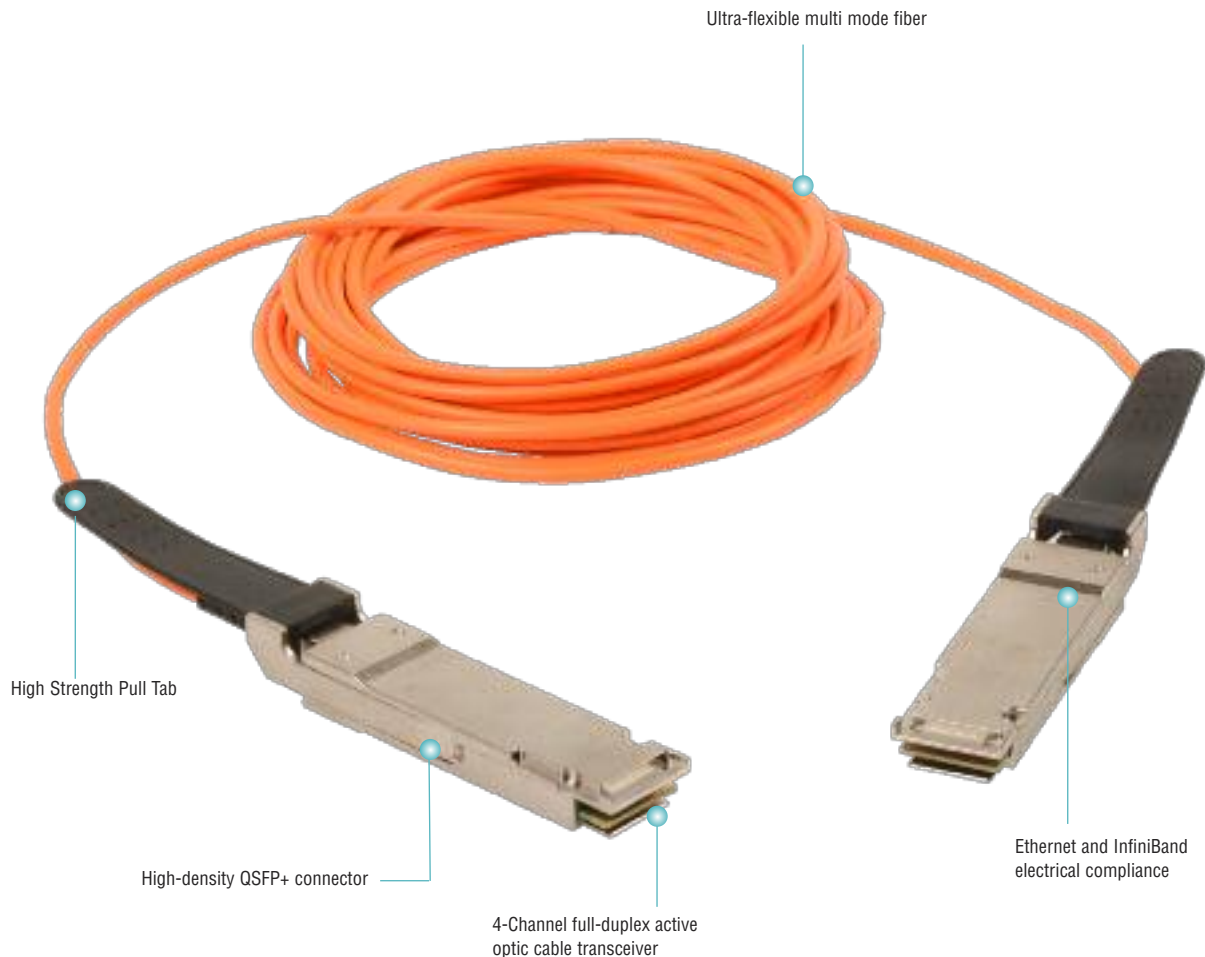

QSFP+ 40G Active Optical Cables

Ordering Information:

QSFP+ to QSFP+ Active Optical Cable Assemblies

Part Number	Length
QSFP-FC-005.0	5m (16.4 ft.)
QSFP-FC-010.0	10m (32.8 ft.)
QSFP-FC-015.0	15m (49.2 ft.)
QSFP-FC-020.0	20m (65.6 ft.)
QSFP-FC-030.0	30m (98.4 ft.)
QSFP-FC-050.0	50m (164.0 ft.)
QSFP-FC-100.0	100m (328.1 ft.)

Note: Contact Customer Service for additional lengths.

PERFORMANCE SPECIFICATIONS

Electrical	
Supply Voltage	3.1 to 3.6V
Power Consumption Per End	0.8W typical, 1.2W Max
General	
Operating Temperature	0 to 70° C (32 to 158° F)
Storage Temperature	-25 to 75° C (-13 to 167° F)
Channels	4 channels, bi-directional
Connector (each end)	QSFP+

Cable	
Type	OM2 LSOH
Minimum Bend Radius	15xDIA - Dynamic 10xDIA - Static
Minimum Cable Assembly Bend Radius	Cable and Connector: 56mm (2.20 in.)
Cable OD	3mm +/- .1mm (.012 in.)
Channel Parameters	
Channels	4 Lanes, bi-directional
Data Rate	10.5 Gbps/ channel Max
Operating Optical Wavelength	850nm

Standards Compliance
IBTA V2 Revision 1.3, IEEE 802.3ba
SFF-8436, SFF-8363
RoHS-6 (lead free)
Class 1 laser product per IEC 60825-1
IEEE 802.3ba

© 2018 Siemon SIS_SS_QSFPActive_RevD_0418

Because we continuously improve our products, Siemon reserves the right to change specifications and availability without prior notice.

Worldwide Headquarters North America Watertown, CT USA Phone (1) 860 945 4200	Regional Headquarters Europe Chertsey, Surrey, England Phone (44) 0 1932 571771	Regional Headquarters Russia Moscow, Russia Phone (7) 495 781 1111	Regional Headquarters Africa Cape Town, South Africa Phone (27) 21 5385 0303	Regional Headquarters China Shanghai, P.R. China Phone (86) 215385 0303	Regional Headquarters Latin America Bogota, Colombia Phone (571) 657 1950/51/52	Regional Headquarters India Dubai, United Arab Emirates Phone (971) 4 3689743	Regional Headquarters Middle East Dubai, United Arab Emirates Phone (971) 4 3689743	Regional Headquarters Asia Pacific Sydney, Australia Phone (86) 21 5385 0303	Siemon Interconnect Solutions Watertown, CT USA Phone (1) 860 945 4213 US www.siemon.com/SIS
--	---	---	---	--	--	---	--	---	---