
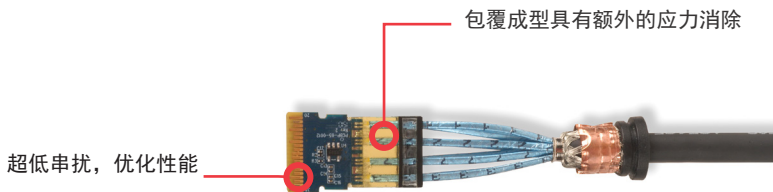


QSFP+ 40G 直连铜缆跳线

西蒙的 QSFP+ 无源直连铜缆跳线组件针对高密度应用而开发，为高速数据中心的互连提供了经济、低功率的选择。直连铜缆组件。QSFP+ 接口可以取代四个标准的 SFP+ 连接，提升了密度降低了系统成本。直连组件支持最新的 40GB 应用，标准长度可达 5m，也可以根据客户需求定制更长的组件。

应用

- Ethernet 10G, 40G
- Infiniband 4X SDR, DDR, QDR
- Fiber Channel 10G, 40G, SAN
- Top-Of-Rack
- Switch-to-Switch
- Switch-to-Server
- Networking
- Storage
- Hubs
- Routers
- Servers
- NIC

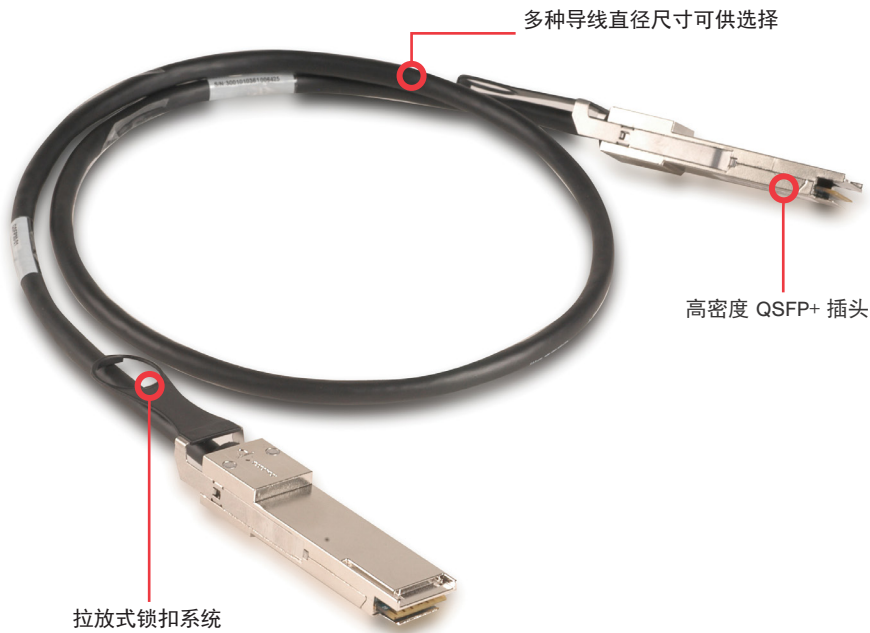

订购信息

黑色	长度	线规
QSFP30-00.5L	0.5 M (1.6 FT.)	30
QSFP30-01L	1.0 M (3.3 FT.)	30
QSFP30-01.5L	1.5 M (4.9 FT.)	30
QSFP30-02L	2.0 M (6.6FT.)	30
QSFP30-02.5L	2.5M (8.2FT.)	30
QSFP30-03L	3.0 M (9.8 FT.)	30
QSFP26-05L	5.0 M (16.4 FT.)	26

产品信息

性能参数

电气		线缆	
MIN. DIELECTRIC WITHSTAND VOLTAGE	300 VDC	CONDUCTOR	SOLID
INSULATION RESISTANCE	1000 MOHMS	WIRE GAUGE	30 AWG AND 26 AWG
CURRENT RATING	0.5 A MIN/SIGNAL CONTACT	IMPEDANCE	100 ±5 OHMS
常规		CONSTRUCTION	TWIN AXIAL
OPERATING TEMPERATURE	0 TO 70°C (32 TO 158°F)	CABLE OD	30 AWG - 6.50 MM (0.256 IN) 26 AWG - 8 MM (0.315 In.)
FLAMMABILITY RATING (PLASTICS)	UL94	JACKET TYPE	CM/LSOH
GREEN FEATURES	RoHS, LEAD-FREE	BEND RADIUS	5X CABLE OD = SINGLE 10X CABLE OD = REPEATED
SHIELD	BRAID/FOIL	满足标准	
MARKING	MFG NAME, PART #, DATE CODE	IEEE 802.3ba	
插头		EEPROM-SFF-8436	
BACKSHELL MATERIAL	NICKEL PLATED ZINC DIE-CAST	RoHS	
CONTACT MATERIAL	PCB WITH GOLD-PLATED PADS	IBTA v2 REVISION 1.3	
PLASTIC MATERIAL	PA66		
LATCH	POSITIVE LATCHING W/PULL TAB		
INSERTION FORCE	40N (8.9 LBF.) MAX		
WITHDRAWAL FORCE	30N (6.7 LBF.) MAX		
RETENTION FORCE	90N (20.2 LBF.) MIN		
DURABILITY	250 CYCLES		
TIGHTEST RECOMMENDED VERTICAL SPACING (BELLY TO BELLY)	11.80MM (0.46 IN.) CENTER TO CENTER		
TIGHTEST RECOMMENDED VERTICAL SPACING (STACKED)	17.50MM (0.69IN.) CENTER TO CENTER		

由于我们不断地改进我们的产品，西蒙保留未经事先通知即改变规格和可用性的权利。

北美
P: (1) 860 945 4200

亚太
P: (61) 2 8977 7500

拉丁美洲
P: (571) 657 1950/51/52

欧洲
P: (44) 0 1932 571771

中国
P: (86) 215385 0303

印度中东和非洲
P: (971) 4 3689743

Siemon Interconnect Solutions
P: (1) 860 945 4213
www.siemon.com/SIS

