

AOC 有源光缆

QSFP28 100G 扇出


Siemon 100G QSFP28至4x SFP28扇出有源光缆(AOC)组件为0.5m至100m长度的收发器组件提供了高可靠性和高性价比的替代方案，远超过直连铜缆(DAC)的范围。这些高性能和低功耗的AOC具有坚固的结构，兼容以太网、InfiniBand和MSA，组件包含高强度拉扣锁定系统，减少插头损耗，确保更安全的安装。

这些100G QSFP28至4x SFP28扇出组件能够传输高达4x25Gb/s的数据，通过单根多模光缆提供灵活简单的安装。AOC消除了收发器组件的互操作性问题以实现参数优化，并具备数字诊断监控，允许I²C实时监控操作参数，并在参数超限时发送警告。

典型的AOC应用包括数据中心内的点对点连接、高性能计算和存储应用。多种连接方式可以支持同列或跨列的机架间连接，热插拔和高密度的设计使其可以在柜顶交换和其他数据中心架构中被广泛地使用。



- 满足标准
- QSFP28 MSA
 - SFP28 MSA
 - SFF8431 Electrical
 - SFF8432 Mechanical
 - IEEE P802.3bm
 - 100GBASE-SR4
 - 4 x 25GBASE-SR
 - RoHS/REACH compliant
 - CML Compatible Electrical I/O
 - CAUI-4
 - TUV/UL certified

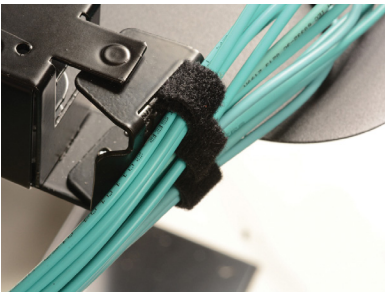

小线径捆扎
小线径的AOC可组成更小的线缆束，促进更好的气流管理

型号 (PVC)	型号(LS0H)	长度
Q4S28F-Y00.5B13	Q4S28F-V00.5B13	0.5m (1.64 ft.)
Q4S28F-Y01.0B13	Q4S28F-V01.0B13	1.0m (3.28 ft.)
Q4S28F-Y01.5B13	Q4S28F-V01.5B13	1.5m (4.92 ft.)
Q4S28F-Y02.0B13	Q4S28F-V02.0B13	2.0m (6.56 ft.)
Q4S28F-Y03.0B13	Q4S28F-V03.0B13	3.0m (9.87 ft.)
Q4S28F-Y05.0B13	Q4S28F-V05.0B13	5.0m (16.40 ft.)
Q4S28F-Y07.0B13	Q4S28F-V07.0B13	7.0m (22.97 in.)
Q4S28F-Y10.0B13	Q4S28F-V10.0B13	10.0m (32.80 ft.)
Q4S28F-Y15.0B13	Q4S28F-V15.0B13	15.0m (49.21 ft.)
Q4S28F-Y20.0B13	Q4S28F-V20.0B13	20.0m (65.62 ft.)
Q4S28F-Y25.0B13	Q4S28F-V25.0B13	25.0m (82.02 ft.)
Q4S28F-Y30.0B13	Q4S28F-V30.0B13	30.0m (98.43 ft.)
Q4S28F-Y40.0B13	Q4S28F-V40.0B13	40.0m (131.23 ft.)
Q4S28F-Y50.0B13	Q4S28F-V50.0B13	50.0m (164.04 ft.)
Q4S28F-X0100B13	Q4S28F-T0100B13	100.0m (328.08 ft.)

产品信息

最大额定参数	最小	最大
Module Supply Voltage	0.0V	4.0V
Storage Temperature	-40°C (-40°F)	85°C (185°F)
Relative Humidity - Storage	0%	85%
Relative Humidity - Operating	0%	85%

电气规格

Module Supply Voltage	3.13V to 3.47V (3.3V typical)
Case Operating Temperature	0°C (32°F) to 70°C (158°F) (25°C (77°F) typical)
Single Module Supply Current	SFP28 220mA (typical per end) QSFP28 510mA (typical)
Maximum Power Consumption Per End	SFP28 0.8W (max per end) QSFP28 1.9W (max)
Bit Rate Per Channel	Covered in Channel Parameters

接收器电气接口

Rx Data Differential Output Voltage	300mV to 900mV (800mV typical)
Rx Data Differential Output Impedance	100Ω (typical)

机械规格	
Minimum Bend Radius	20 x OD mm (without tension) 10 x OD mm (with max tension)
Cable Diameter	3.0mm ± 0.20
Fiber Type	OM3 多模

信道参数

Channels	4 Lanes, bi-directional
Data Rate per Channel	25.78 Gbp/s (max)
Operating Wavelength	850nm

发射器电气接口

Tx Data Differential Input Voltage	300mV to 900mV
Tx Data Differential Input Impedance	100Ω (typical)

由于我们在持续改进产品，西蒙保留未经事先声明即改变规格和可用性的权利。

North America
P: (1) 860 945 4200

Asia Pacific
P: (61) 2 8977 7500

Latin America
P: (571) 657 1950/51/52

Europe
P: (44) 0 1932 571771

China
P: (86) 215385 0303

India Middle East
P: (971) 4 3689743

Siemon Interconnect Solutions
P: (1) 860 945 4213
www.siemon.com/SIS

