


Color-Coded Cable Clips

Siemon's color-coded cable clips are designed to be highly visible, have a secure fit to the cable and easily field attachable to a variety of Siemon copper and fiber cables. With 8 available colors to choose from, these color-coded cable clips provide system administrators the ability to customize their cables to clearly differentiate and identify various networks.

Applications


- SFP+ and QSFP+ DAC cables
- Category Copper Cables
- LC, SC and MTP Fiber Jumpers

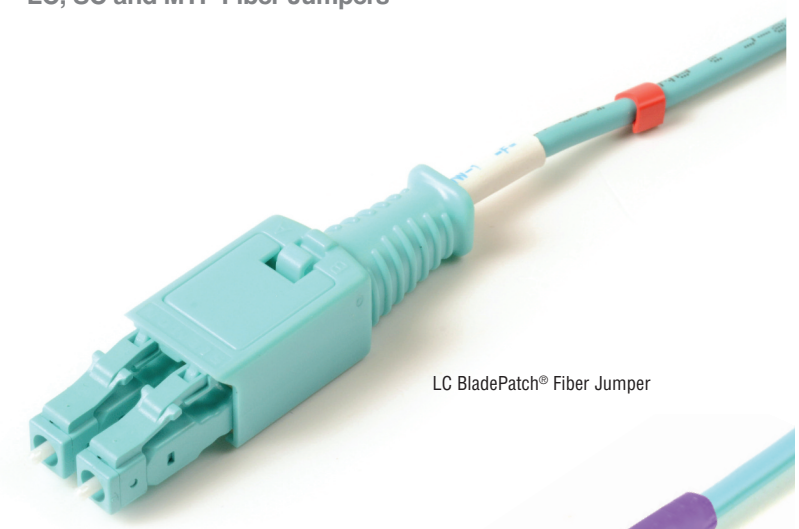

LC BladePatch® Fiber Jumper




Highly Visible and available in 8 Colors

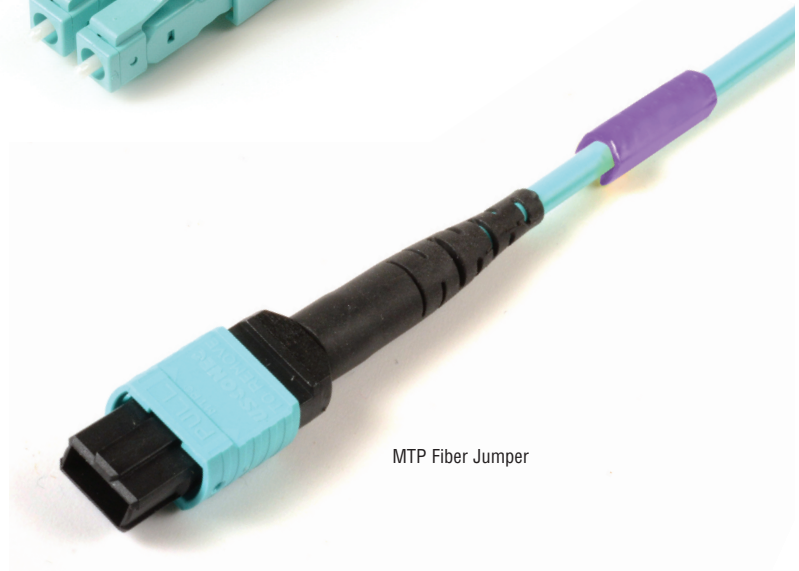

MTP Fiber Jumper



Barbs provide secure fit to cable

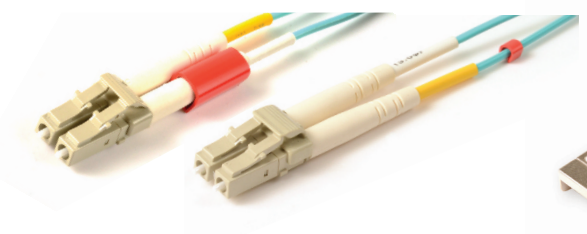

LC Duplex Fiber Jumper



SFP+ Copper Cable



MC5® Category Copper Cable

Color-Coded Cable Clips

Ordering Information:

Part Number	Description (includes maximum cable OD)
CLIP-CBL-30-(XX)	Color-coded cable clip, 3mm (0.12 in.), bag of 25 clips
CLIP-CBL-40-(XX)	Color-coded cable clip, 4mm (0.16 in.), bag of 25 clips
CLIP-CBL-50-(XX)	Color-coded PVC cable clip, 5mm (0.20 in.), bag of 25 clips
CLIP-CBL-62-(XX)	Color-coded cable clip, 6.2mm (0.24 in.), bag of 25 clips
CLIP-CBL-72-(XX)	Color-coded cable clip, 7.2mm (0.28 in.), bag of 25 clips



Use (XX) to specify color: 02=white, 03=red, 04=gray, 05=yellow, 06=blue, 07=green, 08=violet, 09=orange

Siemon also offers CLIP-(XX) for use with our MC 6 patch cords, Z-MAX patch cords and TERA 4-pair patch cords.

Note: Because we continuously improve our products, Siemon reserves the right to change specifications and availability without prior notice.



CLIP-CBL-40-(XX)
CLIP-CBL-50-(XX)
CLIP-CBL-62-(XX)
CLIP-CBL-72-(XX)

PRODUCT SPECIFICATIONS

Material	PVC
Temperature Range	-30° C to +60° C (-22° F to +140° F)
Flammability Rating	UL 94-V0
UV Resistant	Yes
Length	CLIP-CBL-30-XX = 3mm (0.12 in.) All others = 15mm (0.59 in.)

Standards Compliance
Directive 2011/65/EU (RoHS 2)
UL 94 v-0

CABLE FIT INFORMATION

Part Number	Cable Min - Max OD	Fits Siemon DAC Cables	Fits Siemon Category Copper Patch Cords	Fits Siemon LC, SC and MTP Fiber Jumpers
CLIP-CBL-30-XX	2.4-3mm 0.094-0.118 in.	—	—	1.8mm LC jumper assembly LC BladePatch® jumper
CLIP-CBL-40-XX	3-4mm 0.118-0.157 in.	—	28 AWG category 6 stranded cords & all stranded 1-pair cords (TERA® or S110® cords)	3mm SC/ST simplex jumper FR12 MTP to MTP assembly
CLIP-CBL-50-XX	4-5mm 0.157-0.197 in.	28 and 30AWG SFP+ 28 and 30AWG QSFP+ to 4 SFP+ Breakout, 30AWG SFP28, QSFP28 to 4 SFP28, QSFP28 to 2 QSFP28	24 AWG solid IC5 cords, 26 AWG stranded cords (category 6 and lower), 30 AWG SFP to SFP, QSDFP28 to 4 SFP28, QSFP28 to 2 QSFP28	FS24 MTP to MTP fiber core assembly LC jumper assembly
CLIP-CBL-62-XX	5-6.2mm 0.197-0.244 in.	24 and 26AWG SFP+ 24 and 26 AWG QSFP+ to 4 SFP+ Breakouts 26 AWG SFP28, QSFP to 4 SFP28	23 AWG solid IC6 cords, 24 AWG stranded cords (BladePatch, S110, S210®), 26 AWG S/FTP stranded cords (Z-MAX®, BladePatch, TERA), SFP28 to SFP28, QSFP28 to QSFP28	LC jumper (boot) SC jumper (boot)
CLIP-CBL-72-XX	6.2-7.2mm 0.244-0.283 in.	28 and 30AWG QSFP+, 30 AWG QSFP28, 26 AWG QSFP28 to 2 QSFP28	26 AWG QSFP28 to 2 QSFP28 30 AWG QSFP28 to QSFP28	—

Because we continuously improve our products, Siemon reserves the right to change specifications and availability without prior notice.

Worldwide Headquarters North America Watertown, CT USA Phone (1) 860 945 4200	Regional Headquarters Europe Africa Chertsey, Surrey, England Phone (44) 0 1932 571771	Regional Headquarters China Shanghai, P.R. China Phone (86) 215385 0303	Regional Headquarters Latin America Bogota, Colombia Phone (571) 657 1950/51/52	Regional Headquarters India Middle East Dubai, United Arab Emirates Phone (971) 4 3689743	Regional Headquarters Asia Pacific Sydney, Australia Phone (86) 21 5385 0303	Siemon Interconnect Solutions Watertown, CT USA Phone (1) 860 945 4213 US www.siemon.com/SIS
--	---	--	--	--	---	---