


MC[®] 5e UTP Modular Cords - International

Siemon's MC series category 5e modular cords are key components to ensure optimum channel performance of our category 5e UTP systems. The cable used to manufacture the category 5e patch cords exceeds the specifications set forth by both ANSI/TIA-568.2-E and ISO/IEC 11801-1 Ed 1.0.

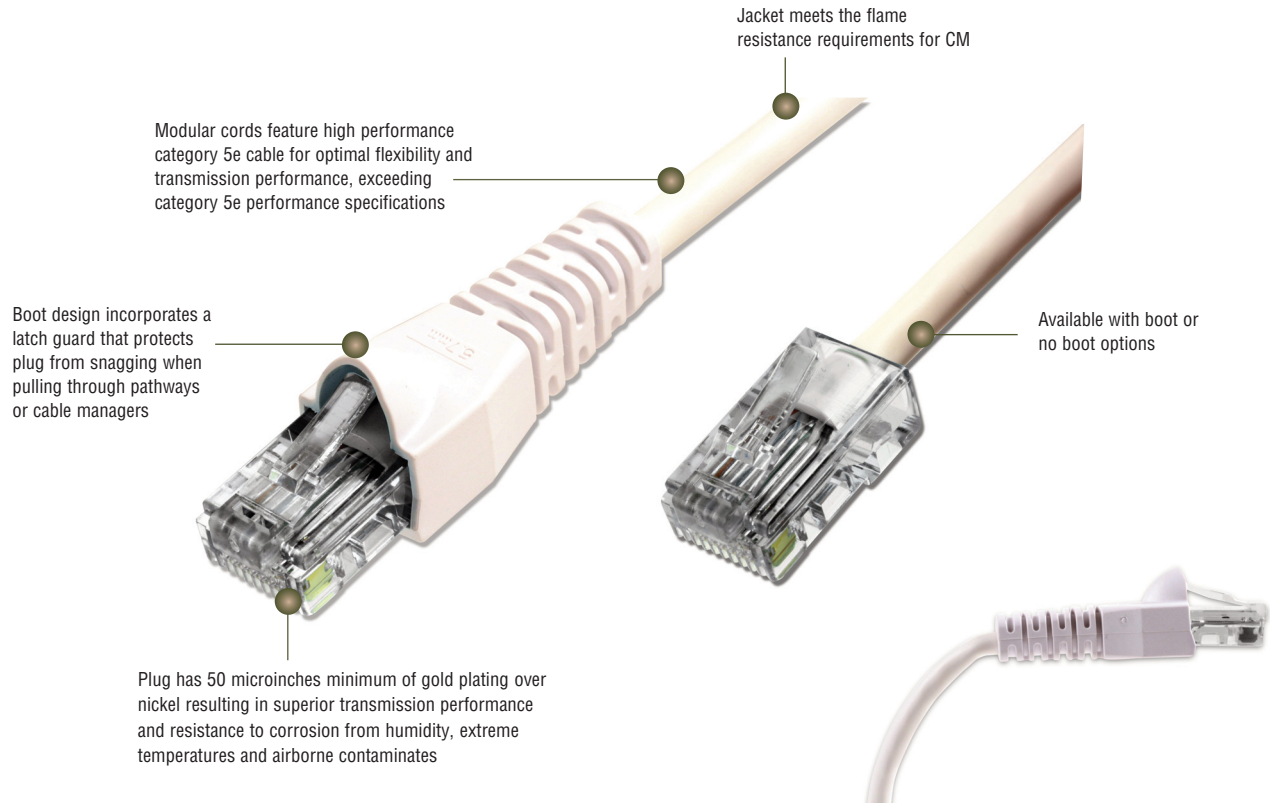

Excellent Bend Relief

Boot and integrated strain relief ensures proper bend relief, critical for category 5e performance



STANDARDS COMPLIANCE

- ANSI/TIA-568.2-E
- ISO/IEC 11801-1 Ed 1.0
- IEEE 802.3af (Type 1 PoE)
- IEEE 802.3at (Type 2 PoE)
- IEEE 802.3bt (Type 3 PoE)
- IEEE 802.3bt (Type 4 PoE)
- Power over HDBaseT (PoH)
- IEC 60603-7
- cUL US Listed
- TIA-968-A (formerly FCC Part 68 Subpart F)

PRODUCT INFORMATION

Performance Specifications:

ELECTRICAL	
Contact Resistance	20 mΩ
Input to Output DC Resistance	200 mΩ
Min. Dielectric Withstand Voltage (contact to contact)	1000 V DC or AC peak
Insulation Resistance	500 mΩ
Current Rating @ 25° C	1.5 A
Power over Ethernet	Suitable for PoE Type 1,2,3,4 and PoH
MECHANICAL — GENERAL	
Operating Temperature	-10 to 60 °C, (14 to 140 °F)
Flammability Rating	UL 94 - V0
Green Features	RoHS
Contact Materials	Copper alloy with contact plating of 50 micro inches gold or equivalent
Plastic Materials	Flame retardant thermoplastic
Marking	P/N, length, performance level, QC
MECHANICAL — PLUG	
Number of Plug Insertion Cycles	750
Min. Plug Retention Force	50N (11.24 lbf)
Plug Compatibility	Compatible with RJ45 outlets

MECHANICAL — CABLE (STRANDED)	
Wire Size Range (nominal)	26 AWG 7x34 Stranded tinned copper
Cable Construction	UTP
Cable O.D. (nominal)	4.9mm (0.19 in.)
Wiring	T568B*
Jacket Type	CM
Bend Radius	6mm (0.24 in.)

*Double-ended cords wired T568B are suitable for both T568A & T568B applications

MC 5e UTP Modular Cords

MC category 5e, double-ended, 4-pair UTP stranded modular patch cord, booted and non-booted options available.

MC5-(XX)M-(XX)(XX)	
Cord Length	Boot Color:
01 = 1m (3.2 ft.)	01 = Black 04 = Gray 07 = Green Blank = No Boot
1.5 = 1.5m (5 ft.)	02 = White 05 = Yellow 08 = Violet
02 = 2m (6.5 ft.)	03 = Red 06 = Blue 09 = Orange
03 = 3m (9.8 ft.)	Cord Color:
05 = 5m (16.4 ft.)	01 = Black 04 = Gray 07 = Green
7.5 = 7.5m	02 = White 05 = Yellow 08 = Violet
	03 = Red 06 = Blue 09 = Orange

Ⓢ Add "B" for bulk pack of 100 modular cords.



SCAN TO DOWNLOAD SPEC SHEET

Because we continuously improve our products, Siemon reserves the right to change specifications and availability without prior notice.

North America
P: (1) 860 945 4200

Mexico
P: (521) 556 387 7708/09/10

Latin America
P: (571) 657 1950/51/52

Europe
P: (44) 0 1932 571771

Asia Pacific
P: (61) 2 8977 7500

Siemon OEM Technologies
P: (1) 860 945 4213
www.siemon.com/OEM

China
P: (86) 215385 0303

India, Middle East & Africa
P: (971) 4 3689743