

TERA® Category 8.2 Patch Cords

Regional Availability - Global


Part of the TERA 8.2 cabling solution, Siemon's Category 8.2 patch cords exceed ISO/IEC Category 8.2/Class II specifications when utilized in a 2-connector, 30-meter Class II channel. TERA Class II channels and permanent links deliver transmission performance up to 2 GHz to support high-speed 25 Gigabit and 40 Gigabit ethernet in data center applications. In conjunction with Category 8.2 cable and TERA-MAX® patch panels populated with TERA outlets, the Category 8.2 TERA-to-RJ45 patch cords are ideal for 2-connector switch-to-server connections in middle of row (MoR) and end of row (EoR) data center configurations. The Category 8 compatible RJ45-to-RJ45 patch cords are ideal in direct attach switch-to-server connections used in top of rack (ToR) configurations. Constructed of Category 8.2 S/FTP 2000 MHz cable, TERA Category 8.2 patch cords are backwards compatible with Category 7A/Class FA and lower cabling systems.

High Performance Cable

Cords feature Category 8.2 S/FTP stranded cable for optimal transmission performance while eliminating alien crosstalk

Standards-Compliant Interface

Recognized with ISO/IEC 11801-1 Ed. 1.0

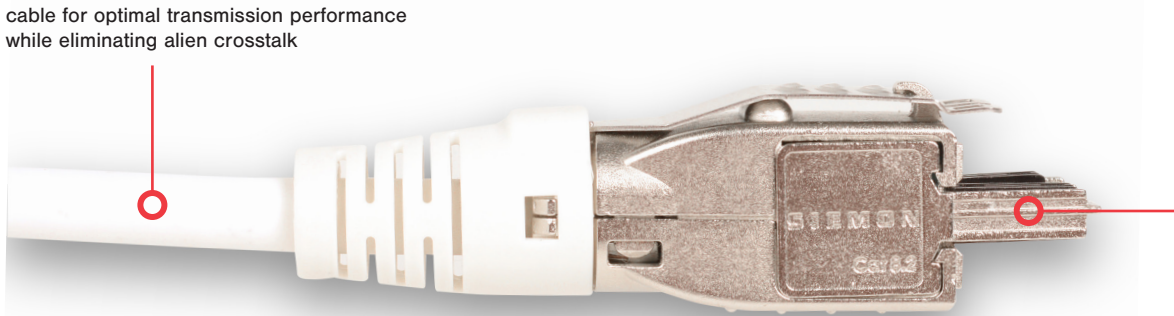

STANDARDS COMPLIANCE

- ISO/IEC 11801-1 Ed 1.0
- IEC-61156
- IEC 60603-7
- IEC 61076-3-104

APPLICATION SUPPORT

- 10BASE-T to 40GBASE-T
- IEEE 802.3af (Type 1 PoE)
- IEEE 802.3at (Type 2 PoE)
- IEEE 802.3bt (Type 3 and Type 4)
- Power over HDBaseT (POH)

Easy Color Coding



Removable color clips available in 9 colors allow field color coding to distinguish applications

Category 8.2 Patching

Ideal in direct attach switch-to-server connections used in top of rack (ToR) configurations

Integrated PCB

PCB equipped plug optimizes signal for exceptional transmission

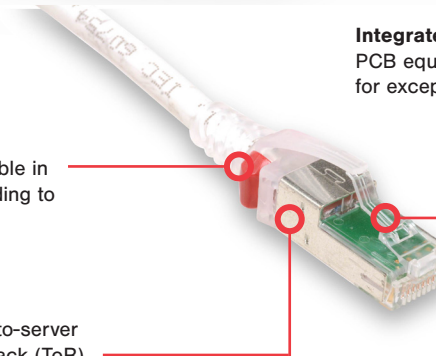

Modular Patching

The TERA 8.2 cords can be used in conjunction with TERA outlets that snap easily into TERA-MAX panels with integrated grounding.



Future Proof Backwards Compatible

Supports autonegotiation for current 10 Gig to future 25/40 Gig speeds.



RJ45 Interface

TERA to RJ45 patch cords allow the TERA Category 8.2 system to be easily connected to RJ45-equipped active electronics.

Product Information

PERFORMANCE SPECIFICATIONS

CORD ASSEMBLY

Wiring	T568A/B as specified by part #
Operating Temperature	-20 to 70 °C (-4 to 158 °F)
Remote Powering	PoE Type 1, 2, 3, 4, UPoE, PoH
Green Features	RoHS, lead-free, halogen-free, PVC free
Plastic Materials	Flame retardant thermoplastic

CABLE

Wire Size Range (Nominal)	26 AWG Stranded bare copper
Construction	S/FTP
Cable OD (Nominal)	6.3mm (0.25 in)
Jacket type	CM/LSOH
Bend Radius	2.52mm (0.1 in.)

TERA PLUG SPECIFICATIONS

Number of Insertion Cycles	2500
Minimum Mating/Unmating Force	20N (4.5 lbf)
Cable to Plug Tensile Strength (min)	50N (11.24 lbf)
Mated Contact Resistance	20 mΩ
Input to Output DC Resistance	200 mΩ (signal conductors), 100 mΩ (shield)
Insulation Resistance (min)	500 MΩ
Minimum Dielectric Withstand Voltage	1000 VAC contact to contact, 1500 VDC contact to shield
Transfer Impedance	100mΩ @ 10 MHz
Current Rating @ 25°C (77°F)	1.5 A
Flammability Rating	Contact Holder: UL94-V0, Plug Boot: UL-HB
Contact Material	Copper alloy with 50 microinches gold plating or equivalent
Plug Housing Material	Zinc Diecast, Nickel Plating

Ordering Information

T48(X)-S(XX)M-02 ----- Category 8.2 Compatible TERA to RJ-45 modular plug, CM/LSOH cable, white jacket with matching TERA boot

Wiring	
A = T568B	
T = T568A	
Cord Length	
01 = 1 meter	
02 = 2 meter	
03 = 3 meter	
05 = 5 meter	

DA8-S(XX)M-02 ----- Category 8.2 Compatible RJ-45 to RJ-45 modular plug, CM/LSOH cable, T568A/B wiring, white jacket with clear boot

Cord Length	
01 = 1 meter	
02 = 2 meter	
03 = 3 meter	
05 = 5 meter	

CLIP-(XX) ----- Color coding clip, bag of 25

Clip Color		
01 = Black	04 = Gray	07 = Green
02 = White	05 = Yellow	08 = Violet
03 = Red	06 = Blue	09 = Orange



RJ-45 PLUG SPECIFICATIONS

Number of Insertion Cycles	2500
Minimum Mating/Unmating Force	30N (6.7 lbf)
Cable to Plug Tensile Strength (min)	50N (11.24 lbf)
Mated Contact Resistance	20 mΩ
Input to Output DC Resistance	200 mΩ (signal conductors), 100 mΩ (shield)
Insulation Resistance (min)	500 MΩ
Minimum Dielectric Withstand Voltage	1000 VAC contact to contact, 1500 VDC contact to shield
Transfer Impedance	200mΩ @ 10 MHz
Current Rating @ 25°C (77°F)	1.5 A
Flammability Rating	UL94-V0
Contact Material	Copper alloy with 50 microinches gold plating or equivalent
Plug Housing Material	Polycarbonate
Screen	360 degree enclosure around plug body

Because we continuously improve our products, Siemon reserves the right to change specifications and availability without prior notice.

North America P: (1) 860 945 4200 **Asia Pacific** P: (61) 2 8977 7500 **Latin America** P: (571) 657 1950/51/52 **Europe** P: (44) 0 1932 571771 **China** P: (86) 215385 0303 **India, Middle East & Africa** P: (971) 4 3689743

Siemon Interconnect Solutions
P: (1) 860 945 4213
www.siemon.com/SIS

WWW.SIEMON.COM

