
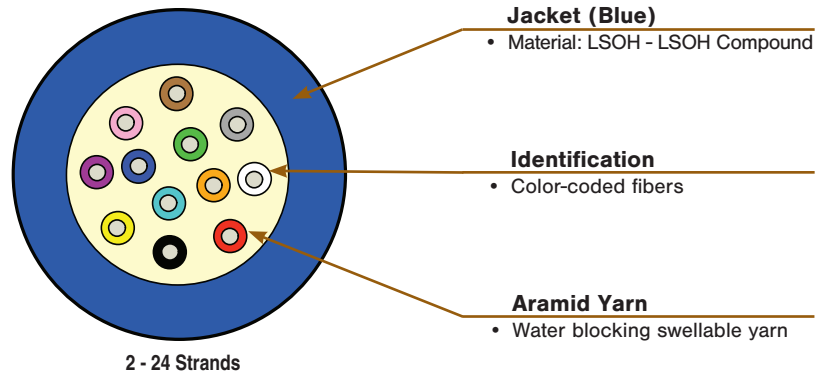


XGLO® & LightSystem® Indoor/Outdoor Tight Buffer, C_{ca}S_{1a}d_{1a}1 - EMEA

Siemon LSOH-FR indoor/outdoor tight buffer fiber cables are ideal for data centres, campus and building backbones. Siemon fiber optic cables are offered in XGLO and LightSystem configurations supporting high-speed applications such as Gigabit Ethernet, 10 Gigabit Ethernet and Fiber Channel. Siemon indoor/outdoor water blocking is primarily for dry duct applications for moisture and temporary water migration protection.

Ordering Information

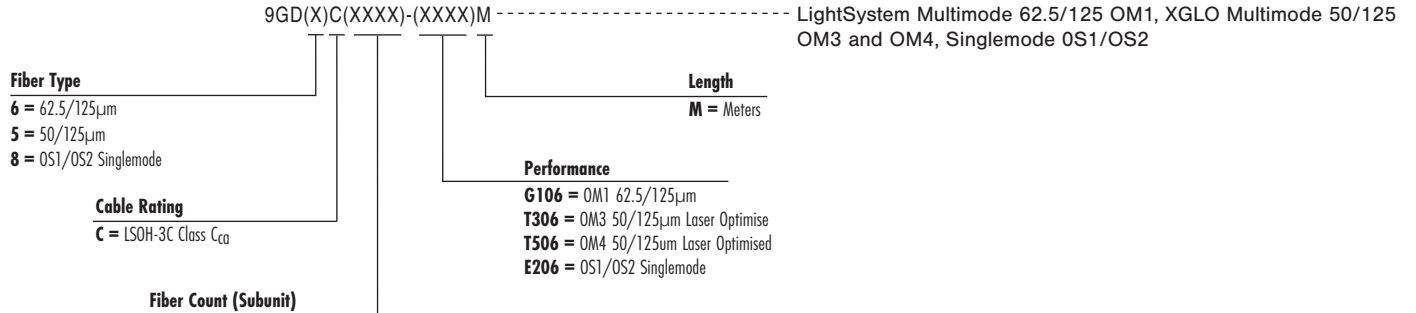

Note: This cable features a glass yarn design with a high tensile strength that provides a degree of rodent protection which is effective in many cases. The function of glass yarns differs from the other rodent protection materials such as a 100% metallic armour protection. The glass yarns provide a degree of protection because it is disagreeable and un-pleasant for most rodents to gnaw the glass yarns.

LIGHTSYSTEM Multimode 62.5/125, OM1	XGLO 300 Multimode 50/125, OM3	XGLO 550 Multimode 50/125, OM4	XGLO Singlemode OS1/OS2																																																																																						
STANDARD COMPLIANCE	STANDARD COMPLIANCE	STANDARD COMPLIANCE	STANDARD COMPLIANCE																																																																																						
<ul style="list-style-type: none"> ISO/IEC 11801:2002 OM1 (62.5/125) ANSI/TIA-568.3-D ANSI/TIA-598-D ANSI/TIA-492 AAAA Telcordia GR-409-CORE IEC 60332-1-2 IEC 60332-3, IEC 60332-1-12 (Single strand) IEC 60754-2 (Acid gas) IEC 61034-2 (Smoke Density) EN 50399 Class E_{ca}, D_{ca} Class C_{ca} s_{1a}, d₁, a₁ 	<ul style="list-style-type: none"> ISO/IEC 11801:2002 OM3 ANSI/TIA-568.3-D ANSI/TIA-598-D ANSI/TIA-492 AAAC IEC 60793-2-10 Fiber Type Ala.2 Telcordia GR-409-CORE IEC 60332-1-2 IEC 60332-3, IEC 60332-1-12 (Single strand) IEC 60754-2 (Acid gas) IEC 61034-2 (Smoke Density) EN 50399 Class E_{ca}, D_{ca} Class C_{ca} s_{1a}, d₁, a₁ 	<ul style="list-style-type: none"> ISO/IEC 11801:2002 OM3 ISO/IEC 11801:2002 Ammdment 2 OM4 ANSI/TIA-568.3-D ANSI/TIA-598-D ANSI/TIA-492 AAAD IEC 60793-2-10 Fiber Type A1a.3 Telcordia GR-409-CORE IEC 60332-1-2 IEC 60332-3, IEC 60332-1-12 (Single strand) IEC 60754-2 (Acid gas) IEC 61034-2 (Smoke Density) EN 50399 Class E_{ca}, D_{ca} Class C_{ca} s_{1a}, d₁, a₁ 	<ul style="list-style-type: none"> ISO/IEC 11801:Ed 2.0 Amendment:1:2008 ANSI/TIA-568.3-D ANSI/TIA-598-D ANSI/TIA-492 CAAB Telcordia GR-409-CORE ITU-T G.652 C/D IEC 60332-1-2 IEC 60332-3, IEC 60332-1-12 (Single strand) IEC 60754-2 (Acid gas) IEC 61034-2 (Smoke Density) EN 50399 Class E_{ca}, D_{ca} Class C_{ca} s_{1a}, d₁, a₁ 																																																																																						
APPLICATIONS SUPPORT	APPLICATIONS SUPPORT	APPLICATIONS SUPPORT	APPLICATIONS SUPPORT																																																																																						
<table border="1"> <thead> <tr> <th>APPLICATION</th> <th>DISTANCE(m)</th> </tr> </thead> <tbody> <tr><td>10GBASE-S (850 nm)</td><td>N/A</td></tr> <tr><td>62.5/125µm</td><td>26</td></tr> <tr><td>1000BASE-S (850 nm)</td><td>N/A</td></tr> <tr><td>62.5/125µm</td><td>275</td></tr> <tr><td>1000BASE-LX (1300 nm)</td><td>550</td></tr> <tr><td>Fiber Channel 266 (1300 nm)</td><td>1,500</td></tr> <tr><td>ATM 622 (1300 nm)</td><td>500</td></tr> <tr><td>ATM 155 (1300 nm)</td><td>2,000</td></tr> <tr><td>ATM 52 (1300 nm)</td><td>3,000</td></tr> <tr><td>ATM 52 (1300 nm)</td><td>3,000</td></tr> <tr><td>FDDI (Original-1300 nm)</td><td>2,000</td></tr> <tr><td>100BASE-FX (1300 nm)</td><td>2,000</td></tr> </tbody> </table>	APPLICATION	DISTANCE(m)	10GBASE-S (850 nm)	N/A	62.5/125µm	26	1000BASE-S (850 nm)	N/A	62.5/125µm	275	1000BASE-LX (1300 nm)	550	Fiber Channel 266 (1300 nm)	1,500	ATM 622 (1300 nm)	500	ATM 155 (1300 nm)	2,000	ATM 52 (1300 nm)	3,000	ATM 52 (1300 nm)	3,000	FDDI (Original-1300 nm)	2,000	100BASE-FX (1300 nm)	2,000	<table border="1"> <thead> <tr> <th>APPLICATION</th> <th>DISTANCE(m)</th> </tr> </thead> <tbody> <tr><td>10GBASE-S (850 nm)</td><td>300</td></tr> <tr><td>10GBASE-LX4 (1300 nm)</td><td>300</td></tr> <tr><td>1000BASE-S (850 nm)</td><td>1000</td></tr> <tr><td>1000BASE-LX (1300 nm)</td><td>600</td></tr> <tr><td>Fiber Channel 266 (1300 nm)</td><td>1,500</td></tr> <tr><td>ATM 622 (1300 nm)</td><td>500</td></tr> <tr><td>ATM 155 (1300 nm)</td><td>2,000</td></tr> <tr><td>ATM 52 (1300 nm)</td><td>3,000</td></tr> <tr><td>FDDI (Original-1300 nm)</td><td>2,000</td></tr> <tr><td>100BASE-FX (1300 nm)</td><td>2,000</td></tr> </tbody> </table>	APPLICATION	DISTANCE(m)	10GBASE-S (850 nm)	300	10GBASE-LX4 (1300 nm)	300	1000BASE-S (850 nm)	1000	1000BASE-LX (1300 nm)	600	Fiber Channel 266 (1300 nm)	1,500	ATM 622 (1300 nm)	500	ATM 155 (1300 nm)	2,000	ATM 52 (1300 nm)	3,000	FDDI (Original-1300 nm)	2,000	100BASE-FX (1300 nm)	2,000	<table border="1"> <thead> <tr> <th>APPLICATION</th> <th>DISTANCE(m)</th> </tr> </thead> <tbody> <tr><td>10GBASE-S (850 nm)</td><td>550</td></tr> <tr><td>10GBASE-LX4 (1300 nm)</td><td>300</td></tr> <tr><td>1000BASE-S (850 nm)</td><td>1100</td></tr> <tr><td>1000BASE-LX (1300 nm)</td><td>600</td></tr> <tr><td>Fiber Channel 266 (1300 nm)</td><td>1,500</td></tr> <tr><td>ATM 622 (1300 nm)</td><td>500</td></tr> <tr><td>ATM 155 (1300 nm)</td><td>2,000</td></tr> <tr><td>ATM 52 (1300 nm)</td><td>3,000</td></tr> <tr><td>FDDI (Original-1300 nm)</td><td>2,000</td></tr> <tr><td>100BASE-FX (1300 nm)</td><td>2,000</td></tr> </tbody> </table>	APPLICATION	DISTANCE(m)	10GBASE-S (850 nm)	550	10GBASE-LX4 (1300 nm)	300	1000BASE-S (850 nm)	1100	1000BASE-LX (1300 nm)	600	Fiber Channel 266 (1300 nm)	1,500	ATM 622 (1300 nm)	500	ATM 155 (1300 nm)	2,000	ATM 52 (1300 nm)	3,000	FDDI (Original-1300 nm)	2,000	100BASE-FX (1300 nm)	2,000	<table border="1"> <thead> <tr> <th>APPLICATION</th> <th>DISTANCE(m)</th> </tr> </thead> <tbody> <tr><td>10GBASE-L (1310 nm)</td><td>8,000</td></tr> <tr><td>10GBASE-E (1550 nm)</td><td>30,000</td></tr> <tr><td>10G Fiber Channel (Serial-1310 nm)</td><td>10,000</td></tr> <tr><td>10G Fiber Channel (WDM-1310 nm)</td><td>10,000</td></tr> <tr><td>1000BASE-LX (1300 nm)</td><td>5,000</td></tr> <tr><td>Fiber Channel 266/1062 (1300 nm)</td><td>10,000</td></tr> <tr><td>ATM 52/155/622 (1300 nm)</td><td>15,000</td></tr> </tbody> </table>	APPLICATION	DISTANCE(m)	10GBASE-L (1310 nm)	8,000	10GBASE-E (1550 nm)	30,000	10G Fiber Channel (Serial-1310 nm)	10,000	10G Fiber Channel (WDM-1310 nm)	10,000	1000BASE-LX (1300 nm)	5,000	Fiber Channel 266/1062 (1300 nm)	10,000	ATM 52/155/622 (1300 nm)	15,000
APPLICATION	DISTANCE(m)																																																																																								
10GBASE-S (850 nm)	N/A																																																																																								
62.5/125µm	26																																																																																								
1000BASE-S (850 nm)	N/A																																																																																								
62.5/125µm	275																																																																																								
1000BASE-LX (1300 nm)	550																																																																																								
Fiber Channel 266 (1300 nm)	1,500																																																																																								
ATM 622 (1300 nm)	500																																																																																								
ATM 155 (1300 nm)	2,000																																																																																								
ATM 52 (1300 nm)	3,000																																																																																								
ATM 52 (1300 nm)	3,000																																																																																								
FDDI (Original-1300 nm)	2,000																																																																																								
100BASE-FX (1300 nm)	2,000																																																																																								
APPLICATION	DISTANCE(m)																																																																																								
10GBASE-S (850 nm)	300																																																																																								
10GBASE-LX4 (1300 nm)	300																																																																																								
1000BASE-S (850 nm)	1000																																																																																								
1000BASE-LX (1300 nm)	600																																																																																								
Fiber Channel 266 (1300 nm)	1,500																																																																																								
ATM 622 (1300 nm)	500																																																																																								
ATM 155 (1300 nm)	2,000																																																																																								
ATM 52 (1300 nm)	3,000																																																																																								
FDDI (Original-1300 nm)	2,000																																																																																								
100BASE-FX (1300 nm)	2,000																																																																																								
APPLICATION	DISTANCE(m)																																																																																								
10GBASE-S (850 nm)	550																																																																																								
10GBASE-LX4 (1300 nm)	300																																																																																								
1000BASE-S (850 nm)	1100																																																																																								
1000BASE-LX (1300 nm)	600																																																																																								
Fiber Channel 266 (1300 nm)	1,500																																																																																								
ATM 622 (1300 nm)	500																																																																																								
ATM 155 (1300 nm)	2,000																																																																																								
ATM 52 (1300 nm)	3,000																																																																																								
FDDI (Original-1300 nm)	2,000																																																																																								
100BASE-FX (1300 nm)	2,000																																																																																								
APPLICATION	DISTANCE(m)																																																																																								
10GBASE-L (1310 nm)	8,000																																																																																								
10GBASE-E (1550 nm)	30,000																																																																																								
10G Fiber Channel (Serial-1310 nm)	10,000																																																																																								
10G Fiber Channel (WDM-1310 nm)	10,000																																																																																								
1000BASE-LX (1300 nm)	5,000																																																																																								
Fiber Channel 266/1062 (1300 nm)	10,000																																																																																								
ATM 52/155/622 (1300 nm)	15,000																																																																																								

Product Information

LIGHTSYSTEM GIGABIT ETHERNET FIBER OPTIC CABLE

Minimum Performance Parameters for LightSystem 62.5/125µm Multimode Fiber

Fiber Type	Wavelength (nm)	Maximum Attenuation (dB/km)	Minimum Modal Bandwidth(MHz • km)	Guaranteed Gigabit Transmission Distance Meters (Feet)
62.5/125 (OM1)	850	3.5	200	275 (902)
	1300	1.0	500	550 (1804)

*The protocol pertinent to the transmission distance as noted is Gigabit Ethernet per IEEE 802.3:2005.

Minimum Performance Parameters for XGLO 50/125µm Multimode Fiber

Fiber Type	Guaranteed Gigabit Transmission Distance (m)		Guaranteed Gigabit 10 Transmission Distance (m)		Minimum Bandwidth (MHz • km)		Maximum Attenuation (dB/km)	
	850 nm	1300 nm	850 nm [†]	1300 nm ^{††}	850 nm	1300 nm	850 nm	1300 nm
50/125 (OM3)	1000	600	300	300	RML - 2000 OFL - 1500	OFL - 500	3.0	1.0
50/125 (OM4)	1100	600	550	300	RML - 4700 OFL - 3500	1OFL - 500	3.0	1.0

† 10GBASE-S †† 10GBASE-LX4

Minimum Performance Parameters for XGLO Singlemode Fiber

Fiber Type	Wavelength (nm)	Maximum Attenuation (dB/km)
Singlemode (OS1/OS2)	1310	0.40
	1550	0.30

XGLO and LIGHTSYSTEM INDOOR/OUTDOOR TIGHT BUFFER (INTERNATIONAL) PHYSICAL SPECIFICATIONS

Physical Specifications (All Values are Nominal)

Fiber Count	Nominal Cable Diameter (nm)	Maximum Attenuation Newtons (N)		Nominal Net Weight (kg/km)
		Installation	Long Term	
2	7.5	1500	1000	46
4	7.5	1500	1000	48
6	7.5	1500	1000	49
8	8.0	1500	1000	54
12	8.3	1500	1000	62
16	8.8	2100	1300	75
24	9.4	2400	1500	87

Fiber Count	Maximum Crush Resistance (N/mm)	Operation Temperature °C (°F)	Installation Temperature °C (°F)	Storage Temperature °C (°F)	Minimum Bend Radius	
					Installation	Long Term
2 - 24	25	-20 to 70 (-4 to 158) °F	-20 to 60 (-4 to 140) °F	-40 to 70 (-40 to 158) °F	20 x DIA.	10 x DIA.

Custom lengths and jacket colours are available upon request. Contact our Customer Service Department for more information.

Because we continuously improve our products, Siemon reserves the right to change specifications and availability without prior notice.

North America P: (1) 860 945 4200	Asia Pacific P: (61) 2 8977 7500	Latin America P: (571) 657 1950/51/52	Europe P: (44) 0 1932 571771	China P: (86) 215385 0303	India Middle East P: (971) 4 3689743
---	--	---	--	-------------------------------------	--

Siemon OEM Technologies
P: (1) 860 945 4213
www.siemon.com/OEM

WWW.SIEMON.COM

