


# XGLO® & LightSystem® Indoor/Outdoor, Armor, LooseTube, EuroClass B2<sub>ca</sub>S<sub>1a</sub>, d<sub>1</sub>, a<sub>1</sub> – Up to 24F

Regional Availability – EMEA



Siemon LSOH-FR B2ca indoor/outdoor armor loose tube cables are ideal for campus and building backbones. Siemon fiber optic cables are offered in XGLO and LightSystem configurations supporting high-speed, applications such as Gigabit Ethernet, 10 Gigabit Ethernet and Fiber Channel. Siemon indoor/outdoor water blocking is primarily for dry duct applications for moisture and temporary water migration protection.

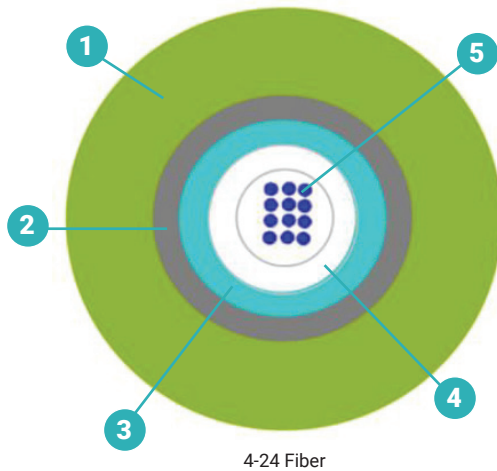

### 1. Jacket (Black)

Material: Halogen free, highly flame retardant thermoplastic

### 2. Armor - Corrugated Steel Tape

Applied longitudinally under cable jacket

### 3. Glass Yarns

### 4. Water Block Tube

### 5. Identification

Color-coded fibers and tubes

## Construction/Features

- Outer jacket is Black Halogen free, flame resistant thermoplastic sheathing compound
- Water blocking, gel-filled loose tubes
- Utilises a robust corrugated steel armor

*These cables have a corrugated steel tape layer which provides 100% rodent protection.*

## LightSystem Multimode 62.5/125, OM1

### Standards Compliance

- ISO/IEC 11801: OM1 (62.5/125)
- IEC 60332-1-2 (Single strand)
- IEC 60754-1-2 (Non Halogens)
- IEC 60754-2 (Acid gas)
- IEC 61034-2 (Smoke density)
- EN 50575
- EN 50399, Class Eca, D ca, Cca Class B2<sub>ca</sub>S<sub>1a</sub>d<sub>1</sub>, a<sub>1</sub>
- EN 50173-1
- IEC 60794-1

## XGLO 300 Multimode 50/125, OM3

### Standards Compliance

- ISO/IEC 11801: OM3
- IEC 60793-2-10 Fiber Type Ala.2
- IEC 60332-1-2 (Single strand)
- IEC 60754-1-2 (Non Halogens)
- IEC 60754-2 (Acid gas)
- IEC 61034-2 (Smoke density)
- EN 50575
- EN 50399, Class Eca, D ca, Cca Class B2<sub>ca</sub>S<sub>1a</sub>d<sub>1</sub>, a<sub>1</sub>
- EN 50173-1
- IEC 60794-1

## XGLO 550 Multimode 50/125, OM4

### Standards Compliance

- ISO/IEC 11801: OM3
- ISO/IEC 11801: Amendment 2 OM4
- IEC 60793-2-10 Fiber Type Ala.3
- IEC 60332-1-2 (Single strand)
- IEC 60754-1-2 (Non Halogens)
- IEC 60754-2 (Acid gas)
- IEC 61034-2 (Smoke density)
- EN 50575
- EN 50399, Class Eca, D ca, Cca Class B2<sub>ca</sub>S<sub>1a</sub>d<sub>1</sub>, a<sub>1</sub>
- EN 50173-1
- IEC 60794-1

## XGLO Singlemode OS2

### Standards Compliance

- ISO/IEC 11801: Ed 2.0 Amendment 1
- IEC 60332-1-2 (Single strand)
- IEC 60754-1-2 (Non Halogens)
- IEC 60754-2 (Acid gas)
- IEC 61034-2 (Smoke density)
- EN 50575
- EN 50399, Class Eca, D ca, Cca Class B2<sub>ca</sub>S<sub>1a</sub>d<sub>1</sub>, a<sub>1</sub>
- EN 50173-1
- IEC 60794-1

## LightSystem Gigabit Ethernet Fiber Optic Cable

### Minimum Performance Parameters for LightSystem 62.5/125µm Multimode Fiber

FIBER TYPE	WAVELENGTH nm	MAX ATTENUATION (dB/km)	MIN MODAL BANDWIDTH (MHz · km)	GUARANTEED GIGABIT TRANSMISSION DISTANCE METERS (Feet)
62.5/125 (OM1)	850	3.5	200	275 (902)
	1300	1.0	500	550 (1804)

The protocol pertinent to the transmission distance as noted is Gigabit Ethernet per IEEE 802.3:2005.

### Minimum Performance Parameters for XGLO 50/125µm Multimode Fiber

FIBER TYPE	GUARANTEED GIGABIT TRANSMISSION DISTANCE (m)		GUARANTEED 10 GIGABIT TRANSMISSION DISTANCE (m)		MIN BANDWIDTH (MHz · km)		MAX ATTENUATION (dB/km)	
	850 nm	1300 nm	850 nm*	1300 nm**	850 nm	1300 nm	850 nm	1300 nm
50/125 (OM3)	1000	600	300	300	RML - 2000 OFL - 1500	OFL - 500	3.0	1.0
50/125 (OM4)	1100	600	550	300	RML - 4700 OFL - 3500	OFL - 500	3.0	1.0

\*10GBASE-S

\*\*10GBASE-LX4

### Minimum Performance Parameters for XGLO SINGLEmode Fiber

FIBER TYPE	WAVELENGTH nm	MAX ATTENUATION (dB/km)
SINGLEMODE (OS2)	1310	0.40
	1550	0.30

## XGLO and LightSystem Indoor/Outdoor, Loose Tube, Armor (EMEA) Physical Specifications

### Physical Specifications (All Values Are Nominal)

FIBER COUNT	CABLE CONSTRUCTION	NOMINAL CABLE DIAMETER mm (in)	MAX PULLING TENSION – NEWTONS (lbs)		WEIGHT kg (lbs)
			Installation	Long Term	
4	Central Tube	8.5 (0.33)	3000 (674)	1000 (225)	100 (220.5)
6	Central Tube	8.5 (0.33)	3000 (674)	1000 (225)	100 (220.5)
8	Central Tube	8.5 (0.33)	3000 (674)	1000 (225)	100 (220.5)
12	Central Tube	8.5 (0.33)	3000 (674)	1000 (225)	100 (220.5)
16	Central Tube	8.5 (0.33)	3000 (674)	1000 (225)	100 (220.5)
24	Central Tube	8.5 (0.33)	3000 (674)	1000 (225)	100 (220.5)

FIBER COUNT	MAX CRUSH RESISTANCE (n/mm)	OPERATION TEMPERATURE °C	INSTALLATION TEMPERATURE °C	STORAGE TEMPERATURE °C	MIN BEND RADIUS	
					Installation	Long Term
4-24	22	-40 to 70	-40 to 70	-40 to 70	20 x DIA	10 x DIA

In the interval -60° C to 70° C there is no attenuation variation (≤0.05 dB) for a single mode fiber, when tested according to the standard mentioned.

The temperature limits shall be understood as the actual temperature of the cable. During installation take into account the possible heating due to any installation in the direct sun.

Custom lengths and jacket colors are available upon request. Contact our Customer Service Department for more information.

# Ordering Information

## LightSystem: Multimode 62.5/125 OM1, XGLO Multimode 50/125 OM3, 50/125 OM4, Singlemode OS2

9GGA (X) B (XXXX) (XXXX) N

FIBER TYPE	FIBER COUNT	PERFORMANCE
6 = 62.5/125µm	004C = 4 (1 Tube with 4 Fibers)	G101 = OM1 62.5/125µm
5 = 50/125µm	006D = 6 (1 Tube with 6 Fibers)	T301 = OM3 50/125µm Laser Optimised
8 = OS1/OS2 Singlemode	008E = 8 (1 Tube with 8 Fibers)	T501 = OM4 50/125µm Laser Optimised
	012G = 12 (1 Tube with 12 Fibers)	E201 = OS2 Singlemode
	016K = 16 (1 Tube with 16 Fibers)	
	024L = 24 (1 Tubes with 24 Fibers)	

Because we continuously improve our products, Siemon reserves the right to change specifications and availability without prior notice.

**North America**  
P: (1) 860 945 4200

**Mexico**  
P: (521) 556 387 7708/09/10

**Latin America**  
P: (571) 657 1950/51/52

**Europe**  
P: (44) 0 1932 571771

**China**  
P: (86) 215385 0303

**India, Middle East & Africa**  
P: (971) 4 3689743

**Asia Pacific**  
P: (61) 2 8977 7500

**Siemon OEM Technologies**  
P: (1) 860 945 4213  
[www.siemon.com/OEM](http://www.siemon.com/OEM)

[www.siemon.com](http://www.siemon.com)

