


LightVerse® Fiber Optic Cabling System

LightVerse Enclosures

Regional Availability - Global

The Siemon LightVerse system includes a range of sleek enclosures available in Core, Plus and Pro options suitable for a wide variety of application needs. Each LightVerse has the ability to support up to 96 fibers within 1U of rack space for all termination methods. Whether its pre-terminated, field terminated or splice terminated, LightVerse has got you covered.

The range starts with our LightVerse Core model, which offer basic functionality—including fixed fiber termination, and limited configuration options. LightVerse Plus builds upon the functionality of the Core model, introducing additional functionality and moveability with slide out drawers to the product family. The LightVerse Pro level enclosures build further introducing complete modularity, moveability and flexibility, making it ideal for resolving your more complex challenges. Complying with the latest standards of TIA 568.3-E, and ECA 310-E, it has a hinged front panel and internal guide for jumpers, its construction in steel with high-resistance epoxy paint guarantees longevity to the product due to its high resistance to scratches and accidental wear. The product is also compatible with LC, LC Shutter, SC, FC, ST and MTP adapters, as well as modules for LC, Shutter, LC UPC, LC APC, with polarity A, B1, B2, C and Universal with either Base8 or Base12 which guarantees future upgrades to numerous technologies without the need to change the Enclosure

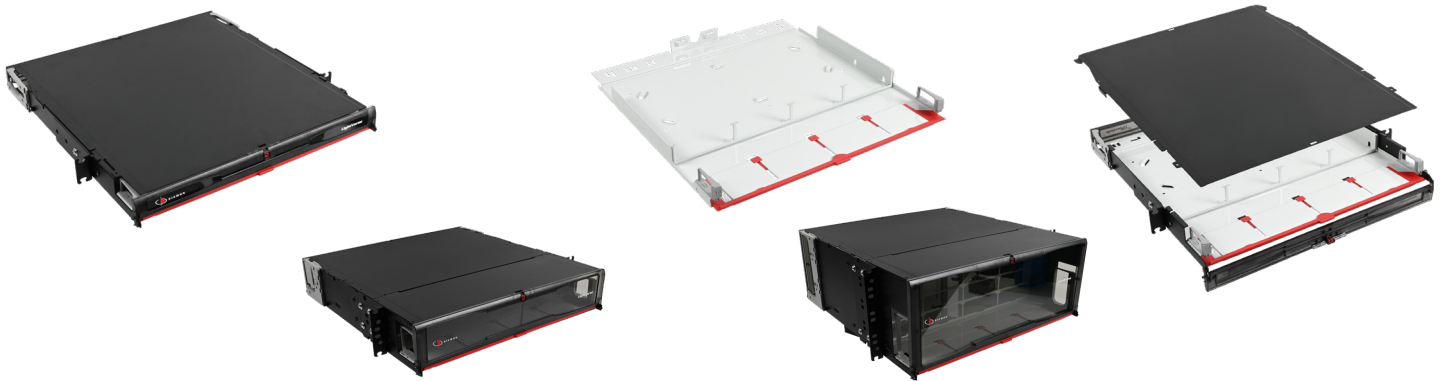

Versatile Sliding Tray

The high-contrast white sliding tray aids with visibility in dark spaces and supports 2 stop locations. The tray can also be fully removed if needed to better support splicing applications.

Flexible Cable Management

Each LightVerse enclosure includes integrated front cable managers and optional rear clips, which allow users to easily manage their fiber jumpers from a variety of access points.

Simplified Installation

All LightVerse enclosures feature slotted holes on the bottom of the enclosure which reduce weight and improve airflow. The result is a robust enclosure that can still be installed by one person, even the 4U.



EXCEPTIONAL ACCESS

Each LightVerse enclosure includes a removable top cover and an integrated label holder which can be accessed even when the door is closed, providing users with increased access options for installation as well as for day to day moves, adds and changes.



SIMPLIFIED MANAGEMENT

The unique design of our LightVerse system allows the plug and play modules and splice cassettes to be installed or removed from the front or rear of the enclosure, allowing maximum flexibility for day-to-day management.

Product Information

LightVerse™ Core

Part Number	Description
LVE-1U-MS-C01A	1U, Fixed Panel, Modular Mount, 4 Adapter Plate Openings





LightVerse Plus

Part Number	Description
LVE-1U-MD-T01A	1U, Sliding Drawer, Modular Mount, 4 Adapter Plate Openings



LightVerse Pro

Part Number	Description
LVE-1U-MD-P01A	1U, Sliding Drawer, Modular Mount, 4 Adapter Plate Openings
LVE-2U-MD-P01A	2U, Sliding Drawer, Modular Mount, 8 Adapter Plate Openings
LVE-4U-MD-P01A	4U, Sliding Drawer, Modular Mount, 16 Adapter Plate Openings

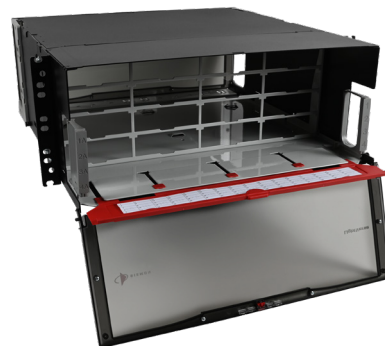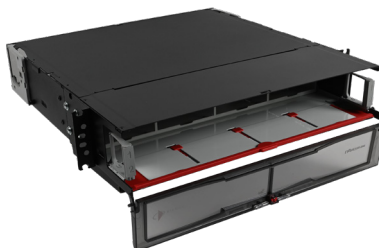

Physical Attributes

Part Number	Weight	Dimensions	Materials
LightVerse 1U Core	8 lbs	19" L x 13" D x 1.7" H	Cold Rolled Steel
LightVerse 1U Plus	15 lbs	19" L x 14.5" D x 1.7" H	Cold Rolled Steel and Flame Retardant Thermoplastic
LightVerse 1U Pro	20.25 lbs	19.3" L x 20.5" D x 1.7" H	Cold Rolled Steel and Flame Retardant Thermoplastic
LightVerse 2U Pro	16.92 lbs	19.3" L x 20.5" D x 3.4" H	Aluminum, Cold Rolled Steel and Flame Retardant Thermoplastic
LightVerse 4U Pro	19.76 lbs	19.3" L x 20.5" D x 6.9" H	Aluminum, Cold Rolled Steel and Flame Retardant Thermoplastic

Because we continuously improve our products, Siemon reserves the right to change specifications and availability without prior notice.

North America P: (1) 860 945 4200	Asia Pacific P: (61) 2 8977 7500	Latin America P: (571) 657 1950/51/52	Europe P: (44) 0 1932 571771	China P: (86) 215385 0303	India, Middle East & Africa P: (971) 4 3689743
---	--	---	--	-------------------------------------	--

Siemon Interconnect Solutions P: (1) 860 945 4213 www.siemon.com/SIS	Mexico P: (521) 556 387 7708/09/10
---	--