




BLADEPATCH™ 6 UTP

Siemon's new BladePatch patch cord offers a unique solution for high-density patching environments. It features an innovative push-pull boot design to control the latch, enabling easy access and removal of the cord in tight-fitting areas. The BladePatch cord is ideal for patching high density blade servers, patch panels, or any equipment with RJ-45 outlets.

Combine the BladePatch with Siemon's MAX® 6 modules and HD® 6 patch panels for a complete Category 6 channel solution. All Siemon BladePatch modular cords are assembled using premium stranded cable that meets all category 6 specifications. These cords are also backwards compatible with lower category connecting hardware.



PATCH CORDS, PLUGS & CABLE

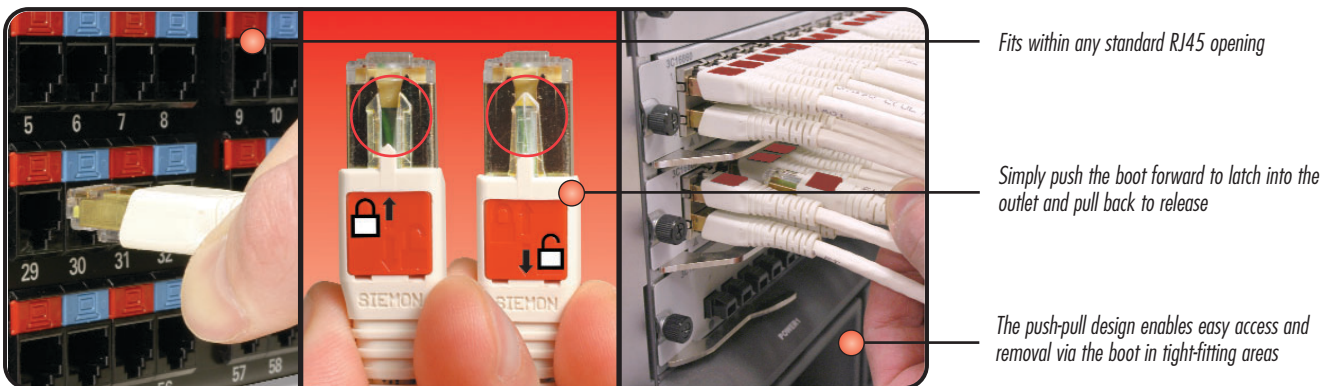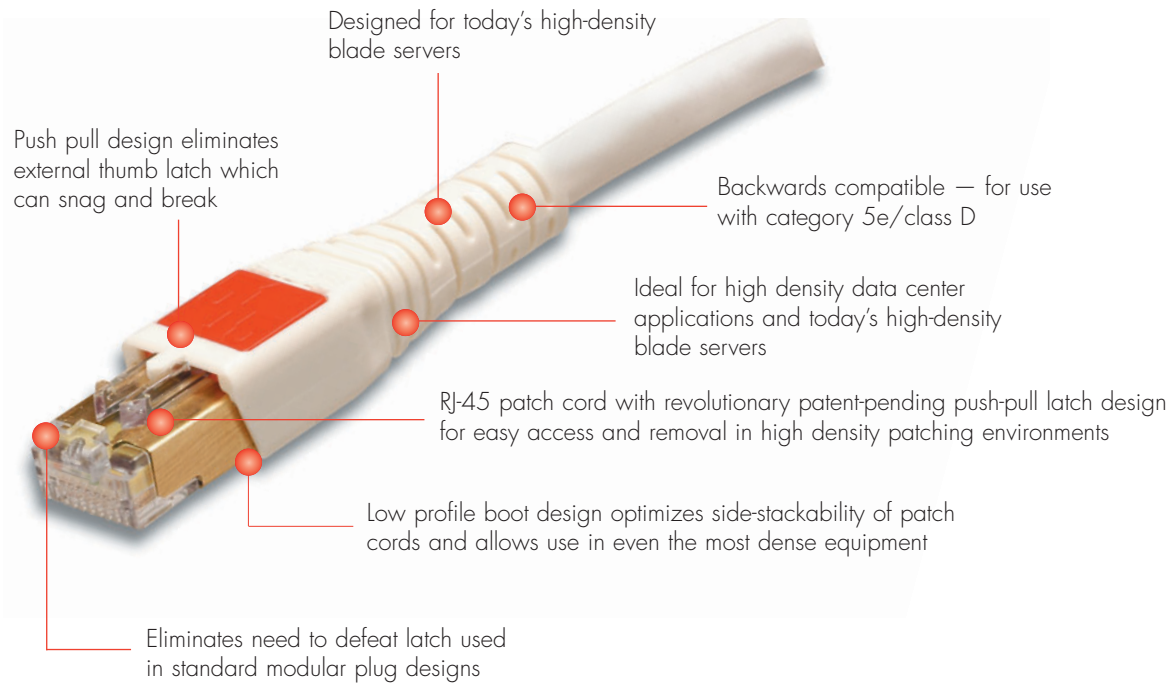

WORST CASE CABLE PERFORMANCE

Siemon Category 6 Stranded Cable Specifications:


Cable used to manufacture BladePatch™ 6 UTP patch cords meets the specifications set forth by both ANSI/TIA/EIA-568-B.2-1 and ISO/IEC 11801:2002. Specifying compliance to both '568 and '11801 ensures minimal cable impedance variation and superior BladePatch 6 return loss performance.

Frequency (MHz)	Maximum Attenuation (dB/100 m)	Power Sum Elfect Loss (dB)	Power Sum Next Loss (dB)
1 MHz	2.4	67.8	72.3
4 MHz	4.5	55.8	63.3
10 MHz	7.1	47.8	57.3
16 MHz	9.1	43.7	54.2
20 MHz	10.2	41.8	52.8
31.25 MHz	12.8	37.9	49.9
62.5 MHz	18.5	31.9	45.4
100 MHz	23.8	27.8	42.3
200 MHz	34.8	21.8	37.8
250 MHz	39.4	19.8	36.3

BladePatch™:

BP6-(XX)-(XX).....Category 6 UTP BladePatch, RJ45 patch cord with push-pull latching design, color matching cord/boot, T568A/B

Use 1st (XX) to specify cord length:
 03 = 0.9m (3 ft.), 05 = 1.5m (5 ft.), 07 = 2.1m (7 ft.),
 10 = 3.1m (10 ft.), 15 = 4.6m (15 ft.), 20 = 6.1m (20 ft.)
 Use 2nd (XX) to specify color:
 01 = black, 02 = white, 03 = red, 04 = gray, 05 = yellow,
 06 = blue, 07 = green

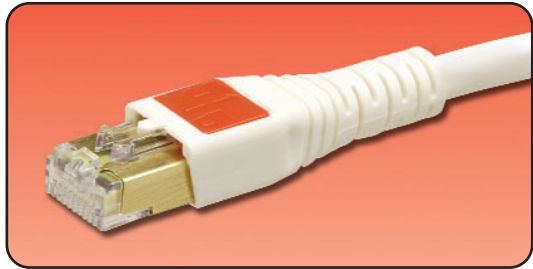

ⓑ Add "B" for bulk project pack of 100 modular cords

Because we are continuously improving our products, Siemon reserves the right to change specifications and availability without prior notice. BladePatch™, MAX® and HD® are trademarks of Siemon

For related product information request Spec Sheet(s):
 HD6 Patch Panels (PROD-SS-HD6)

System 6 Cable
 for Siemon System cable and qualified cable ally part numbers visit www.siemon.com/go/cableally

The Americas
 Watertown, CT USA
 Phone (1) 860 945 4200

Europe/Middle East/Africa
 Surrey, England
 Phone (44) 0 1932-571771

Asia/Pacific
 Shanghai, P.R. China
 Phone (86) 21 6390 6778

WWW.SIEMON.COM

