

# TERA® Patch Cords

Part of the TERA cabling solution, TERA-to-TERA patch cords exceed bandwidth of Category 7<sub>A</sub>/Class F<sub>A</sub> specifications when combined with the TERA outlet. TERA delivers up to 1.2 GHz of bandwidth per pair, providing the extra bandwidth for demanding applications like 10GBASE-T and Broadband Video. Facilitated by 1- and 2-pair patch cords, TERA's extended performance also supports cable sharing – the simultaneous convergence of video, voice data and remote powering onto a single 4-pair cable and outlet.

**2-Pair TERA to Shielded Category 5e RJ-45**  
Plug for 10/100 Ethernet and PoE\*


**4-Pair TERA to Shielded Category 6<sub>A</sub> RJ-45**  
Plug for 1G/10G Ethernet performance

**4-Pair TERA to TERA**  
Supports Category 7/7<sub>A</sub>/Class F/F<sub>A</sub>  
performance to 10Gb/s and PoE (Type 1-4)

**1-Pair TERA to TERA**  
for analog voice and video patching.  
Video balun cord also available

**Standard Compliant Interface**  
Recognized within ISO/IEC 11801 Ed. 2.0

**1-Pair TERA to RJ11**  
Plug for analog voice

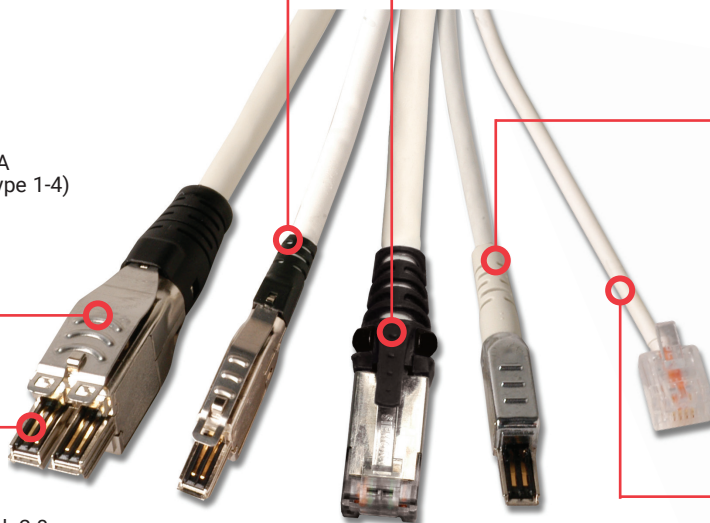

## TERA Field-Terminated Plug

TERA 4-pair plugs can be used to terminate horizontal cable into exact lengths for consolidation point applications. Plugs terminate fully shielded Category 7 and 7<sub>A</sub> solid cable.



### Part Number

### Description


T7P4-B(XX)-1.....	4-Pair TERA plug with colored boot. Compatible with 0.64 – 0.55mm (22 – 23 AWG) solid S/FTP and F/FTP cable
T7P4-B(XX)-2.....	4-Pair TERA plug with colored boot. Compatible with 0.48mm (26 AWG) stranded S/FTP and F/FTP cable

Use (XX) to specify boot color: 01 = Black, 02 = White, 03 = Red, 05 = Yellow, 06 = Blue, 07 = Green

\* One TERA Category 7<sub>A</sub>/Class F<sub>A</sub> channel can support two 10/100 BASE-T Ethernet data and two Type 1 or Type 2 PoE applications as long as power is delivered using IEEE Std 802.3\* -2015 PSE pinout Alternative A.



ISO recognized interface allows TERA cords and outlets to fit within a standard RJ45 footprint.



TERA to RJ45 patch cords allow the TERA system to be easily connected to RJ45 equipped active electronics.



Multiple applications can be run over one 4-pair cable and outlet, saving significant material and pathway space.

# Product Information

## Ordering Information

### TERA® Category 7<sub>A</sub> Patch Cords

T(X)-(XX)M-B(XX)L -----		Category 7 <sub>A</sub> compatible, TERA to TERA, CM/LSOH cable assembly, white jacket, colored boot.
<b>Plug Type</b>	<b>Boot Color</b>	
1 = 1-Pair 4 = 4-Pair	01 = Black 02 = White 03 = Red 05 = Yellow 06 = Blue 07 = Green	
<b>Cord Length</b>		
01 = 1m (3.3 ft.) 02 = 2m (6.6 ft.) 03 = 3m (9.8 ft.) 05 = 5m (16.4 ft.)		

### TERA Category 5e Compatible Patch Cords

T(XXX)-(XX)M-B(XX)L -----		TERA to shielded RJ-45, or TERA to 6 position (voice) modular plug, LSOH cable assembly, white jacket, colored boot.
<b>Plug Type</b>	<b>Boot Color</b>	
2E2 = 2-Pair, RJ-45, 10/100BASE-T 2UT = 2-Pair, RJ-45, Token Ring 1SU1 = 1-Pair, UTP, 6-position, Voice	01 = Black 02 = White 03 = Red 05 = Yellow 06 = Blue 07 = Green	
<b>Cord Length</b>		
01 = 1m (3.3 ft.) 02 = 2m (6.6 ft.) 03 = 3m (9.8 ft.) 05 = 5m (16.4 ft.)		

### TERA Category 6A Patch Cords

T4(X)-S(XX)M-B(XX)L -----		Category 6A, TERA to shielded RJ-45 modular plug, CM/LSOH cable assembly, white jacket, colored boot
<b>Plug Type</b>	<b>Boot Color</b>	
A = T568B T = T568A	01 = Black 02 = White 03 = Red 05 = Yellow 06 = Blue 07 = Green	
<b>Cord Length</b>		
01 = 1m (3.3 ft.) 02 = 2m (6.6 ft.) 03 = 3m (9.8 ft.) 05 = 5m (16.4 ft.)		

### CLIP-(XX) ----- Color coding clip, bag of 25

<b>Clip Color</b>
01 = Black 02 = White 03 = Red 04 = Gray 05 = Yellow 06 = Blue 07 = Green 08 = Violet 09 = Orange



### TERA Video Balun Cords

TERA CATV baluns provide the optimum solution for the transmission of TV or CATV signals over structured cabling systems that were historically limited to voice and data transmission. These products convert the unbalanced TV signals designed for coaxial cabling (75 Ω impedance) to balanced signals (100 Ω impedance) as required for transmission over twisted pair (balanced) cabling. The TERA CATV adapters are specified and usable to 862 MHz. The 1-pair TERA to PAL and TERA to "F" patch cords utilize an integrated balun. The 1-pair shielded TERA to shielded RJ45 patch cord allows connection to third-party RJ45 baluns.

Part Number	Description
T1VC-(XX)M-B01L.....	1-Pair TERA to PAL connector, LSOH cable assembly, gray jacket
T1VF-(XX)M-B01L.....	1-Pair TERA to F connector, LSOH cable assembly, gray jacket
T1S4V-(XX)M-B01L.....	1-Pair shielded TERA to RJ45 patch cord



Use (XX) to specify length: 01 = 1m (3.3 ft.), 1.5 = 1.5m (4.9 ft.), 02 = 2m (6.6 ft.), 03 = 3m (9.8 ft.), 05 = 5m (16.4 ft.)

T1VF-(XX)M-B01L

T1S4V-(XX)M-B01L

Because we continuously improve our products, Siemon reserves the right to change specifications and availability without prior notice.

**North America**  
P: (1) 860 945 4200

**Mexico**  
P: (521) 556 387 7708/09/10

**Latin America**  
P: (571) 657 1950/51/52

**Europe**  
P: (44) 0 1932 571771

**China**  
P: (86) 215385 0303

**India, Middle East & Africa**  
P: (971) 4 3689743

**Asia Pacific**  
P: (61) 2 8977 7500

**Siemon Interconnect Solutions**  
P: (1) 860 945 4213  
www.siemon.com/SIS