

MC[®] 6 UTP Modular Cords

Siemon's category 6 series of modular cords are key components to ensure optimum channel performance of our category 6 UTP systems. A variety of product enhancements contribute to the cord's superior performance — including 250 MHz rated stranded cordage, a patented crosspair isolator and an innovative 360° crimp, which provides excellent plug-to-cable strain relief without causing pair deformation.

The cable used to manufacture the category 6 patch cords exceeds the specifications set forth by both ANSI/TIA-568.2-E and ISO/IEC 11801-1 Ed 1.0.

Excellent support to 1000BaseT, 1000Base TX and ATM



Data | Power | Reach | Delivered

Modular cords feature high performance category 6 cable for optimal flexibility and transmission performance, exceeding category 6 performance specifications

Clear boots and optional color clips enable a single cord part number to be custom colored coded

Integral latch guard protects plug from snagging when pulling through pathways or cable managers


Internal load bar provides consistent terminations and ideal pair geometry

Jacket meets the flame resistance requirements for both CM and LSOH

Boots feature an ultra slim design for high-density patching

Innovative 360° crimp provides excellent plug-to-cable strain relief without causing pair deformation

Patented metallic isolator inside plug for consistent, exceptional NEXT performance



Excellent Bend Relief

Boot and integrated strain relief ensures proper bend relief, critical for category 6 performance



Color Coding

Optional colored clips enable field color coding and can easily be snapped into place without having to disconnect cords



STANDARDS COMPLIANCE

- ANSI/TIA-568.2-E, 862 and 854
- ISO/IEC 11801-1 Ed 1.0
- IEEE 802.3af (Type 1 PoE)
- IEEE 802.3at (Type 2 PoE)
- IEEE 802.3bt (Type 3 PoE)
- IEEE 802.3bt (Type 4 PoE)
- Power over HDBaseT (PoH)
- IEC 60603-7
- cUL US Listed
- IEC 60332-1, 60754, 61054, 61034
- TIA-968-A (formerly FCC Part 68 Subpart F)
- EN 50173-1
- ANATEL and NBR 14565
- ETL verified

PRODUCT INFORMATION

Performance Specifications:

ELECTRICAL	
Contact Resistance	20 mΩ
Input to Output DC Resistance	200 mΩ
Min. Dielectric Withstand Voltage (contact to contact)	1000 V DC or AC peak
Insulation Resistance	500 mΩ
Compatibility	Backwards to cat 5e
Current Rating @ 25° C	1.5 A
Power over Ethernet	Suitable for PoE Type 1,2,3,4 and PoH
MECHANICAL — GENERAL	
Operating Temperature	-10 to 75°C, (14 to 167°F)
Flammability Rating	UL 94 - V0
Green Features	RoHS, lead-free, halogen-free, PVC free
Contact Materials	Copper alloy with contact plating of 50 micro inches gold or equivalent
Plastic Materials	Flame retardant thermoplastic
Marking	P/N, length, performance level, QC
MECHANICAL — PLUG	
Number of Plug Insertion Cycles	750
Min. Plug Retention Force	50N
Plug Compatibility	Compatible with RJ45 outlets

MECHANICAL — CABLE (STRANDED)	
Wire Size Range (nominal)	26 AWG 7x34 ou 7x30 Stranded tinned copper
Cable Construction	UTP
Cable O.D. (nominal)	5.3mm (0.20 in.)
Wiring	T568A/B
Jacket Type	CM/LSOH
Bend Radius	25mm (1.0 in.)

MC 6 UTP Modular Cords


Category 6 MC, double-ended, 4-pair UTP stranded modular patch cord, T568A/B, clear boot.

MC6-(XX)-(XX)	
Cord Length:	Cord Color:
03 = 0.9m (3 ft.)	01 = Black 04 = Gray 07 = Green
05 = 1.5m (5 ft.)	02 = White 05 = Yellow 08 = Violet
07 = 2.1m (7 ft.)	03 = Red 06 = Blue 09 = Orange
10 = 3.1m (10 ft.)	
15 = 4.6m (15 ft.)	
20 = 6.1m (20 ft.)	

CLIP-(XX) Color coding clip, bag of 25

Clip Color		
01 = Black	04 = Gray	07 = Green
02 = White	05 = Yellow	08 = Violet
03 = Red	06 = Blue	09 = Orange

ⓑ Add "B" for bulk pack of 100 modular cords.

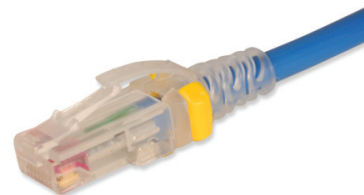

SCAN TO DOWNLOAD
SPEC SHEET

Because we continuously improve our products, Siemon reserves the right to change specifications and availability without prior notice.

North America
P: (1) 860 945 4200

Mexico
P: (521) 556 387 7708/09/10

Latin America
P: (571) 657 1950/51/52

Europe
P: (44) 0 1932 571771

Asia Pacific
P: (61) 2 8977 7500

Siemon OEM Technologies
P: (1) 860 945 4213
www.siemon.com/OEM

China
P: (86) 215385 0303

India, Middle East & Africa
P: (971) 4 3689743